

**DEVELOPMENT OF ULTRA HIGH FREQUENCY ENERGY
HARVESTER USING CIRCULAR SPIRAL ARRAY WITH
CORPORATE FEEDING**

by

KANG CHIA CHAO

**Thesis submitted in fulfillment of the requirements
for the degree of
Doctor of Philosophy**

July 2016

ACKNOWLEDGEMENTS

First of all, I want to express my sincere thanks to my supervisor, Professor Mohd Fadzil Ain with my deepest gratitude. He has been an inspiration to me since I first met him. His energetic style and never ending flow of ideas has been a model in my personal life and academic. I also want to thank him for trusting in me and encouraging me to pursue this adventure, his moral support during my program has been fundamental to the conclusion of my PhD study. His guidance during the development of my research has been invaluable.

I would like to thank Mr. Abdul Latip, Communication lab technicians for their kind assistance and cooperation in conducting the research. Thanks are also extended to Mr. Elias and Mr. Mohd Zuber, PCB lab technicians, for helping me in layout and fabrication of PCB.

I enjoyed working in the Communication Lab at Universiti Sains Malaysia during my PhD study. Thanks to my research team Mohammed Ariff Othman, Ihsan Ahmad Zubir, Ubaid Ullah, Khairul Anuar, Ali Jaafa, Samiyeh Shaghaji, Umill Hasan, and Zuhaimi Zahar. All our group members were extremely helpful. I learned a lot from them. I would also like to thank them for their support and valuable group discussions.

Lastly, I am greatly indebted and appreciate very much to my parents for their encouragement, support and sacrifices throughout the study. On a particular note, I would like to acknowledge the USM Research University (PGRS Grant under project number 1001/PELECT/8046016).

TABLE OF CONTENTS

	Page
ACKNOWLEDGEMENTS	ii
TABLE OF CONTENTS.....	iii
LIST OF TABLES.....	viii
LIST OF FIGURES.....	ix
LIST OF SYMBOLS.....	xiii
LIST OF ABBREVIATIONS.....	xvi
ABSTRAK.....	xvii
ABSTRACT.....	xviii

CHAPTER ONE: INTRODUCTION

1.1 Background	1
1.2 Motivation.....	2
1.3 Problem Statement.....	3
1.4 Objectives.....	4
1.5 Scope.....	5
1.6 Thesis Outline	6

CHAPTER TWO: THEORETICAL BACKGROUND AND LITERATURE REVIEW

2.1 Introduction.....	8
2.2 Antenna Lumped Element Theory.....	9
2.3 Potential Energy Harvesting Technique.....	10
2.3.1 Solar Energy Harvesting	10
2.3.2 Thermal Energy Harvesting	11
2.3.3 Mechanical/Vibration Energy Harvesting	11

2.3.4	Electromagnetic Energy Harvesting.....	12
2.3.5	Radio Frequency (RF) Energy Harvesting.....	12
2.4	Selection of Energy Harvesting Method	13
2.5	Recent Work on Spiral Inductor	14
2.6	Characteristic of UHF Antenna.....	16
2.6.1	Track Spacing, S	17
2.6.2	Track Width, W	17
2.6.3	Turn, N	18
2.6.4	Inner Diameters, D_i	19
2.7	RF Harvesting System.....	19
2.7.1	Rectangular Spiral Antenna.....	21
2.7.2	Equiangular Spiral Antenna.....	22
2.7.3	Yagi-Uda Antenna.....	24
2.7.4	Monopole Antenna.....	25
2.7.5	Circular Polarized Antenna.....	26
2.7.6	Planar Inverter-F Antenna.....	28
2.7.7	Rectangular Patch Antenna.....	28
2.7.8	Meander Line Antenna.....	30
2.7.9	Folded Dipole Antenna.....	32
2.7.10	Dual Band Antenna.....	33
2.7.11	Circular Patch Antenna.....	34
2.7.12	Triple Band Antenna.....	35
2.8	Selection of Antenna.....	35
2.9	Various Type of Schottky Diode.....	36
2.10	Summary.....	37

CHAPTER THREE: DESIGN METHODOLOGY

3.1	Introduction.....	39
3.2	Flow Chart Overview.....	42
3.3	Design Configuration of Proposed Circular Spiral Antenna.....	42
3.3.1	Proposed Single Element Spiral Antenna.....	42
3.3.2	Inductance L.....	44
3.3.3	Capacitance C.....	46
3.3.4	Resistance R.....	46
3.3.5	Parasitic Capacitance	48
3.3.6	Capacitance, C_{tune}	49
3.3.7	Impedance.....	50
3.3.8	Quarter Wave Transformer.....	51
3.3.9	Design Specification.....	52
3.3.10	Design of 1x2 Antenna Array.....	53
3.3.11	Design of 2x4 Antenna Array.....	54
3.4	Proposed Approximate Input Impedance model.....	55
3.5	Modeling The Proposed Antenna using ADS.....	57
3.5.1	Single Element Configuration.....	58
3.5.2	1x2 Antenna Array Configuration.....	60
3.5.3	2x4 Antenna Array Configuration.....	63
3.6	Antenna Simulation Using CST Microwave Studio.....	65
3.6.1	Configuration of CST for Circular Spiral Inductor.....	65
3.6.2	Setting of Dielectric Substrate.....	65
3.6.3	Setting of Microstrip Feeder.....	66

3.6.4	The Waveguide Port.....	68
3.6.5	Boundary Condition.....	68
3.6.6	Far-Field Monitor.....	68
3.6.7	Transient Solver.....	69
3.6.8	Simulation Procedure of the Proposed Antenna.....	69
3.7	Measurement of the Antenna.....	69
3.7.1	S-Parameter Measurement.....	69
3.7.2	Gain Measurement.....	71
3.7.3	Radiation Pattern Measurement	72
3.8	Rectifier Circuit Design	73
3.9	Summary.....	77

CHAPTER FOUR: RESULTS AND DISCUSSIONS

4.1	Introduction.....	78
4.2	Single Element Antenna	78
4.2.1	Return Loss & Impedance Matching.....	78
4.2.2	Radiation Pattern.....	81
4.2.3	Gain.....	83
4.2.4	Momentum Visualization.....	84
4.2.5	Summary	85
4.3	1x2 Circular Spiral Antenna	86
4.3.1	Return Loss & Impedance Matching.....	86
4.3.2	Radiation Pattern.....	89
4.3.3	Gain.....	90
4.3.4	Momentum Visualization.....	91

4.3.5	Summary	92
4.4	2x4 Circular Spiral Antenna	94
4.4.1	Return Loss & Impedance Matching.....	94
4.4.2	Radiation Pattern.....	97
4.4.3	Gain.....	99
4.4.4	Momentum Visualization.....	100
4.4.5	Summary.....	100
4.5	Rectifier Measurement.....	102
4.6	Comparison With Previous Work.....	108
4.7	Summary	109

CHAPTER FIVE: CONCLUSION AND RECOMMENDATIONS

5.1	Conclusion.....	110
5.2	Recommendation.....	111
5.3	Contributions of Research	112

REFERENCES.....	114
-----------------	-----

LIST OF PUBLICATIONS.....	126
---------------------------	-----

APPENDICES: APPENDIX A: Data Tables of Radiation Patterns

APPENDIX B: Data Tables of Gain Plot

APPENDIX C: Data Tables of Output Voltage

APPENDIX D: Experiment Photo

APPENDIX E: All Data Sheet

LIST OF TABLES		Page
Table 2.1	Available frequency bands for energy harvesting	13
Table 2.2	Various of energy sources and power density	14
Table 2.3	Coefficients for inductance formula	16
Table 2.4	Various type of antenna	20
Table 2.5	Comparison of antenna and its characteristic	31
Table 2.6	Characteristic of various type schottky diode	37
Table 2.7	Comparison various type of energy harvesting antenna	39
Table 3.1	Parameter of planar spiral inductor	44
Table 3.2	Basic RO4003C parameter	52
Table 3.3	Characteristic of rectangular brick	65
Table 3.4	Characteristic of dielectric substrate	66
Table 3.5	Comparison of feeding method	67
Table 3.6	Electrical parameters of schottky diode	74
Table 4.1	Summarize between modeling, simulation and measurement results of single element antenna	85
Table 4.2	Summarize between modeling, simulation and measurement results of 1x2 array antenna	93
Table 4.3	Summarize between modeling, simulation and measurement results of 2x4 array antenna	101

LIST OF FIGURES		Page
Figure 1.1	Principle of energy harvesting	2
Figure 2.1	Various sources of energy harvesting	8
Figure 2.2	Two terminal voltage/current representations of lumped element (a) inductor (b) capacitor (c) resistor	9
Figure 2.3	General shape of spiral inductor	15
Figure 2.4	Circular spiral inductor	17
Figure 2.5	Inductance versus line	18
Figure 2.6	Variation of inductor, resonant frequency and quality factor	19
Figure 2.7	Rectangular spiral shape	21
Figure 2.8	Equiangular spiral antenna	22
Figure 2.9	64 element array spiral antenna	23
Figure 2.10	Yagi uda antenna layout	24
Figure 2.11	Cascade of voltage multiplier	25
Figure 2.12	Monopole antenna	26
Figure 2.13	Single element circular polarized antenna	27
Figure 2.14	2x2 circular polarize antenna array	27
Figure 2.15	Layout of planar inverter-F antenna	28
Figure 2.16	Rectangular patch antenna (a) layout of rectangular patch (b) fabricated	29
Figure 2.17	Meander line structure	30
Figure 2.18	Folded dipole antenna	32
Figure 2.19	Layout of dual band antenna	33
Figure 2.20	Circular microstrip antenna array	34
Figure 2.21	Triple band antenna layout	35
Figure 3.1	General block diagram of harvesting circuit	36

Figure 3.2	Flow chart of design and fabrication	41
Figure 3.3	Planar spiral inductor side view	43
Figure 3.4	Lumped element layout	44
Figure 3.5	Side view of microstrip line	50
Figure 3.6	Quarter wave transformer	51
Figure 3.7	1x2 circular spiral antenna array	53
Figure 3.8	Line calculation in ADS	54
Figure 3.9	2x4 circular spiral antenna array	55
Figure 3.10	Input impedance for different wavelengths of short circuit line	56
Figure 3.11	Equivalent circuit of microstrip line	57
Figure 3.12	Modeling of single element circular spiral antenna	59
Figure 3.13	ADS modeling of single circular spiral antenna	60
Figure 3.14	Modeling of 1x2 circular spiral antenna array	61
Figure 3.15	ADS modeling of 1x2 circular spiral antenna array	62
Figure 3.16	Modeling of 2x4 circular spiral antenna array	63
Figure 3.17	ADS modeling of 2x4 circular spiral antenna array	64
Figure 3.18	Coaxial probe feeding	66
Figure 3.19	Microstrip feed line	67
Figure 3.20	Experimental setup of S-parameter measurement	70
Figure 3.21	Experimental set up for gain measurement	72
Figure 3.22	Circuit layout of rectification process	73
Figure 3.23	Half wave rectification	74
Figure 3.24	DC voltage measurement setup	76
Figure 4.1	Single circular spiral antenna (a) return loss of modeling, simulation and Measurement (b) modeling of input impedance	79

Figure 4.2	Smith chart of the 956MHz circular spiral antenna (a) simulated (b) measured	80
Figure 4.3	The E and H radiation patterns of 956 MHz spiral antenna (a) simulated (b) measured	82
Figure 4.4	The simulated and measured gain of the 951-958 MHz spiral antenna	83
Figure 4.5	Momentum visualization	84
Figure 4.6	1x2 circular spiral antenna (a) return loss of modeling, simulation and measurement (b) modeling of input impedance	86
Figure 4.7	Smith chart of the 956MHz 1x2 circular spiral antenna array (a) simulated (b) measured	88
Figure 4.8	The E and H radiation patterns of 956 MHz 1x2 circular spiral antenna array (a) simulated (b) measured	89
Figure 4.9	The simulated and measured gain of the 951-958 MHz spiral antenna 1x2 circular spiral antenna array	91
Figure 4.10	Momentum visualization of 1 x 2 spiral antenna	92
Figure 4.11	2x4 circular spiral antenna array (a) return loss of modeling, simulation and measurement (b) modeling of input impedance	94
Figure 4.12	Smith chart of the 956MHz 2x4 circular spiral antenna array (a) simulated (b) measured	96
Figure 4.13	The E and H radiation patterns of 956 MHz 2x4 circular spiral antenna array (a) simulated (b) measured	97
Figure 4.14	The simulated and measured gain of the 951-960 MHz spiral antenna 2x4 circular spiral antenna array	99
Figure 4.15	Momentum visualization of 2x4 array spiral antenna	100
Figure 4.16	Rectifier circuit with load	102
Figure 4.17	Rectifier hardware	103
Figure 4.18	Simulation results when transmit power P= 15dB	104
Figure 4.19	Measurement results when transmit power P= 15dB	104
Figure 4.20	Output voltage (a) distance at 25cm (b) distance at 50cm (c) distance at 1m	106

Figure 4.21	Various type of load value at distance 25cm	107
Figure 4.22	Maximum distance of energy harvesting	108

LIST OF SYMBOLS

ϵ_r	Dielectric Constant
ϵ_{eff}	Effective Dielectric Constant
Ω	Ohms (Impedance)
β	Propagation Constant
λ_0	The Wavelength in Free Space
λ_g	The Guided Wave Length
μ	Magnetic Permeability
ω	Resonance Frequency
ρ	Fill Ratio
ρ_c	Copper Resistivity
δ	Skin Depth
σ	Copper Conductivity
η	Conversion efficiency
B	Magnetic Flux Density
B_m	The Susceptance of the Fringing Field Capacitance of the Microstrip
C_n	Various Coefficient
C_l	Capacitance of the Microstrip
C	Capacitance
C_p	Parasitic Capacitance
C_{sub}	Substrate Capacitance
C_j	Junction Capacitance
c	Speed of Light

d_{avg}	Average Diameter
d_i	Inner Diameter
d_o	Outer Diameter
E	Electric Field
F	Resonant Frequency
J	Electric Current Density
G_{rm}	Microstrip Radiation Conductance
G_s	Gain of Standard Antenna
G_T	Gain of Tested Antenna
H	Magnetic Field
h	Height of Substrate
I_{BV}	Bias Current
K_g	Presence of Ground
L	Inductance
l	Physical Length
l_{eq}	Extra Length of Microstrip Line
N	Number of Turn
N_i	Ideally factor
W	Width
P_T	Power Received by tested antenna
P_S	Power Received by standard antenna
P_{DC}	Output Power
P_{RF}	RF Input Power
R	Resistance
R_{DC}	DC Resistance

R_s	Skin Effect
R_i	Inner Radius
S	Spacing Between Turns
t_c	Thickness of Copper
Z_0	Microstrip Characteristic Impedance

LIST OF ABBREVIATIONS

ADS	Advanced Design System
AC	Alternating Current
CST	Computer Simulation Technology
DC	Direct Current
DTV	Digital Television
dB	Decibel
GSM	Global System for Mobile
LTE	Long Term Evolution
LHCP	Left Hand Circular Polarized
LED	Light Emitting Diode
PZT	Lead Zirconate Titanate
PVDF	Polyvinylidene Fluoride
PCB	Printed Circuit Board
RF	Radio Frequency
RHCP	Right Hand Circular Polarized
SMA	Sub Miniature version A
SPICE	Simulation Program with Integrated Circuit Emphasis
TV	Television
TEG	Thermoelectric Generator
WSN	Wireless Sensor Node

**PEMBANGUNAN PENUAI TENAGA FREKUENSI ULTRA TINGGI
MENGUNAKAN SUSUNAN LINGKARAN BULAT DENGAN
PENYUAPAN KORPORAT**

ABSTRAK

Tesis ini adalah untuk mereka bentuk struktur antenna alternatif yang boleh meningkatkan gandaan antenna, jumlah tenaga penuai dan membekal kuasa tinggi semasa penerusan. Kajian ini menghasilkan voltan mantap pada frekuensi 956 MHz untuk sistem penuai tenaga RF. Reka bentuk tentang antenna lingkaran bulat dilakukan dengan menggunakan perisian Computer Simulation Technology (CST) dan perisian Advanced Designed System (ADS). Antenna lingkaran bulat disambungkan dengan litar penerus untuk menukarkan isyarat masukan tenaga RF yang diterima daripada bentuk arus ulang-alik (AC) kepada bentuk arus terus (DC) . Tiga konfigurasi reka bentuk telah dicadangkan iaitu antenna lingkaran bulat tunggal 1x2 susunan antenna dan 2x4 susunan antenna. Antenna yang dicadangkan tersebut telah dibangunkan adalah berdasarkan kepada asas ciri-ciri antenna seperti corak sinaran, kehilangan pulangan dan gandaan. 1x2 susunan antenna dan 2x4 susunan antenna telah direka bentuk dengan menggunakan kaedah penyusunan korporat yang dapat meningkatkan gandaan dan voltan keluaran penuai RF. Litar penerus daripada RF kepada arus terus (DC) adalah menggunakan diode *schottky* tanpa bias menukarkan tenaga penuaian yang diterima. Keputusan tersebut menunjukkan semua tiga jenis reka bentuk mempunyai gandaan pada 2.3 dBi, 3.2 dBi and 5 dBi manakala voltan keluaran yang dihasilkan adalah 17 mV, 59.4 mV dan 79 mV masing-masing. Ia didapati juga bahawa antenna lingkaran bulat dapat membekalkan keluaran voltan DC tetap yang bermanfaat untuk aplikasi Ultra Frekuensi Tinggi.

DEVELOPMENT OF ULTRA HIGH FREQUENCY ENERGY HARVESTER USING CIRCULAR SPIRAL ARRAY WITH CORPORATE FEEDING

ABSTRACT

This thesis is to design an alternative antenna structure that will increase gain of the antenna, the amount of harvested energy and provide high power during rectification. The research works generate a steady output at a frequency of 956 MHz for RF energy harvesting system. The design of the circular spiral antenna is performed using Computer Simulation Technology (CST) and Advanced Designed System (ADS). The circular spiral antenna is integrated with the rectifying circuit to efficiently convert the input RF signal from alternating current (AC) to direct current (DC). Three configurations of the antenna designs were proposed namely single circular spiral antenna, 1x2 circular spiral antenna and 2x4 circular spiral antenna. The proposed antenna that had been developed is based on the basic antenna characteristic such as return loss, radiation pattern and gain. The 1x2 array antennas and 2x4 array antenna were designed using the corporate feed method that will increase the gain and enhanced the RF harvesting output voltage. The rectification of RF to DC energy used zero bias schottky diode that convert the incoming harvested energy. The results show that all the three design posses gain of 2.3 dBi, 3.2 dBi and 5 dBi, while the output voltage generated were 17 mV, 59.4 mV and 79 mV respectively. It is found also that the circular spiral antenna can provide a constant output DC voltage which is useful for UHF application.

CHAPTER ONE

INTRODUCTION

1.1 Background

Harvesting or so call scavenging of energy from ambient sources in the environment provides an opportunity for powering circuits in application. This idea have sparked interest in engineering field to design and create more new applications that will fully utilize energy harvesting for power. Applications of the energy harvesting, including the field of RFID tags (Barnett et al., 2009) such as portable medical devices (Paulo and Gaspar, 2010) and bio-telemetry (Huang et al., 2011) of biomedical engineering (Mutashar et al., 2014) are increasing rapidly. For example, one of the self-powered approaches used in RF energy harvesting is that when a circuit has been dormant for long period of time, the power inside might not be available to start up. Due to that, when design for the energy harvesting applications, it needs to be consider for “cold-start” capability where the circuit is boot at initialization process only by harvesting miniscale amount of wasted energy from the environment until sufficient power is available to energize the whole circuit.

As a result, energy harvesting not only enhances current application by eliminating the dependency on battery, but also creates a new device. Figure 1.1 shows the principle and architecture of RF energy harvesting system.

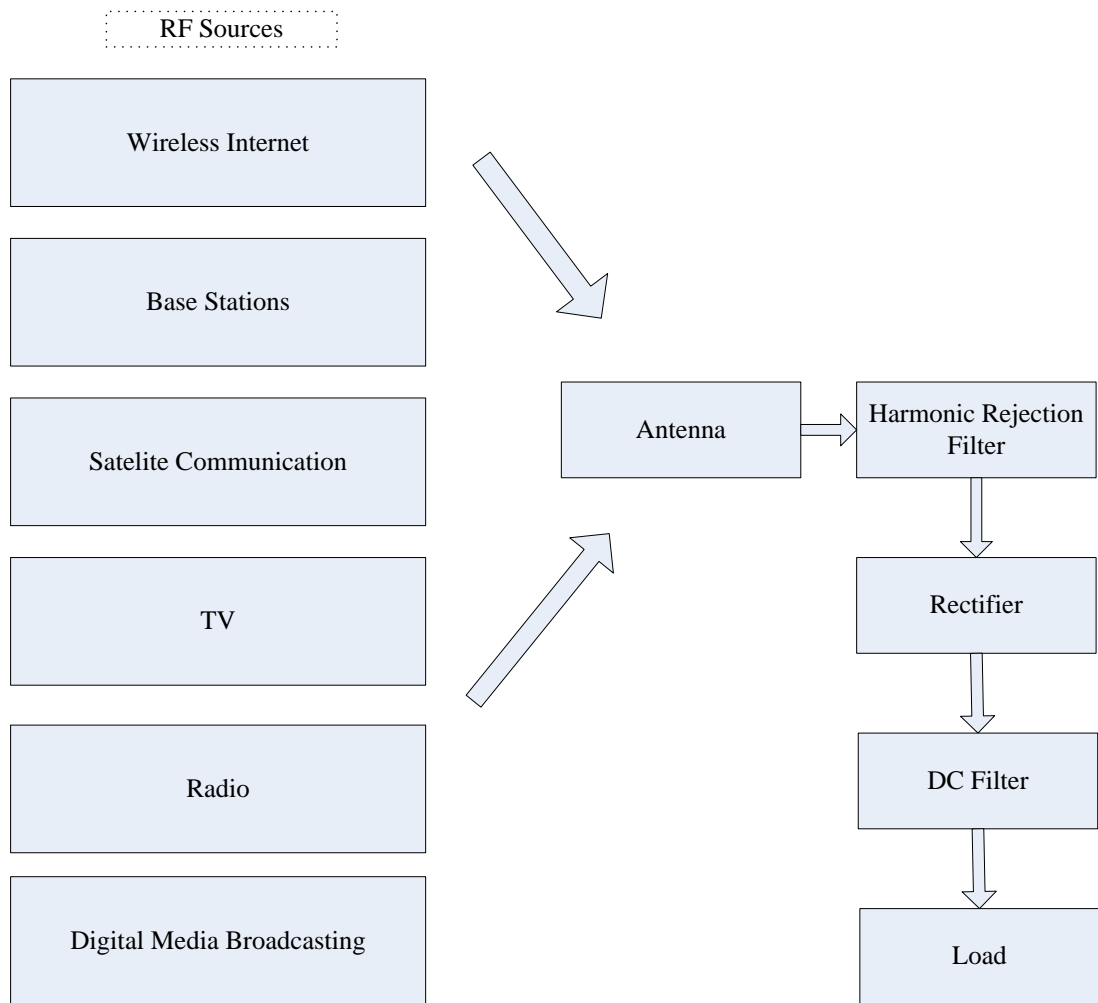


Figure 1.1: Principle of RF energy harvesting

1.2 Motivation

Energy supply has always been the key limiting to the lifetime of wireless sensor node (WSN). Commercial WSN is powered by the batteries. Due to this, batteries have limited lifespan and need to replace in due time. Besides that, battery maintenance becomes a problem when the wireless sensor nodes are placed inaccessible or hazards places (Al-Khayari et al., 2013). Lastly, deposition of battery will cause environmental issue.

The motivation behind this research is to design and evaluate a novel antenna and energy rectification system that will provide the idea of infinite power resources over a period of time to solve the problem of limited battery life (Hucheng et al., 2013). One of the solutions is by using RF energy harvesting method. This RF energy is transmitted in the form of microwave signal and is transmitting out from the various reliable electromagnetic resources for 24 hours (Borges et al., 2014) at any weather condition. By exploring to this possible alternative, thus making the WSN indefinitely self-sustaining (Yildiz, 2009) even when the battery is run out during night time. Other than that, the RF energy harvesting is convenient for the place that difficult to reach (Andia Vera et al., 2010)

Besides that, by using RF energy harvesting, it will overcome the limitation of the traditional energy harvesting. For example, the light harvesting need light sources, the vibration need motion to collect the energy. But for RF energy, it can be collected and recycling from the environment. Last but not least, energy harvesting can be used as backup generator in power systems, which helps to improve the reliability and prevent power interruptions. This project will explores some opportunities to design, simulate and develop a prototype of RF energy harvesting antenna for ultra high frequency application.

1.3 Problem Statement

Development of micro energy harvesting in power efficiency has sparked the interest in engineering field that will lead to create more useful application that will utilize energy harvesting for power. In this research, it is to build radio frequencies (RF) based technologies. Nowadays, there are a lot of devices and technologies that operate in the RF spectrum like cell phone, Wi-Fi etc. This energy

is constantly transmitting from television tower, radio or even cell phone. As a result, there is a lot of abundance of RF wave that will advantage the RF reception to extract power. This abundance energy can be harvested and uses it as a source of power. It is possible to collect all the energy and store it so that it can be used to power other circuits or device. For example, the energy that has been harvested can be used to recharge battery that is fast being depleted in cellular phone. The point in this harvesting method is the RF harvesting technique can be done in every second of the day.

But this compact antenna is suffering in terms of limitation of gain especially as a result of minimization. When the size of antenna is reduced, the amount of electromagnetic capturing will be reduced. Besides that, the normal antenna only can harvest the RF energy at the position of horizontal or vertical. This lead to the problem of the antenna will not able to function because the schottky diode of rectifier circuit receiving a low amount of power.

To overcome the resulting antenna problem, this research is mainly focusing on the feasibility study on the RF spiral antenna design and rectifier operating at 956 MHz frequency. The circular spiral antenna had proved to be useful for energy harvesting application by offering several advantages such as high gain, greater freedom of positioning, mechanical simplicity and cost effective.

1.4 Objectives

The aim of this research is to develop an alternative solution that different from existing antenna. It will provide a set of goals with lightweight, high gain and

more importantly of steady rectifier output. In order to accomplish the aim, this thesis concern around three objectives.

1. To develop and implement the circular spiral array antenna by using the corporate feed technique at 956 MHz in order to enhance the gain characteristic and maximize the harvested DC power in order to overcome the low amount of power at rectifier circuit.
2. To design and model the antenna structure with rectifying circuit that will have freedom on positioning to harvest ultra low power RF signal at 956 MHz operating frequency.
3. To verify the power during rectification and model the proposed spiral antennas (all the three presented designs), compare with the simulated and measurement results to validate the design structure.

1.5 Scope

The scope of this research is to design a high gain antenna that able to rectify the harvesting power as a goal. All the models were excited by using microstrip feed and the antenna layout design were fabricated on the RO4003C board from Roger Corporation. According to the board specification, the thickness is 0.813 mm, relative permittivity of 3.38 and loss tangent of 0.0021. The propose antenna were using Computer Simulation Technology (CST) microwave studio to model and simulate antenna design in order to understand the performance of the antenna. Besides that, Harmonic Balance approach in Advanced System Design (ADS) was used throughout the rectifier design and performance parametric study to obtain the optimum design.

Before the design, the important specifications were set and necessary mathematic equation to achieve the important specification was investigated. Different types of RF harvesting antenna design configuration were developed according to these specifications and their performance were compared in order to demonstrate the specific advantages of the proposed spiral antenna.

During the CST simulation, the characteristic of the antenna such as bandwidth, return loss, gain and the radiation pattern will be determined before fabrication. After that, modeling of the single element circular spiral antenna, 2 element antenna array and lastly 8 element spiral antenna array with corporate feed method was done. These spiral antenna models were done based on the lumped element equivalent calculation.

Finally, the proposed antenna were fabricated and measured. The measurement results were compared with the simulation results in order to observe the results. All results were analyzed, discussed and a conclusion is made based on the observation.

1.6 Thesis outline

This thesis is divided into five chapters. It is organized in such way as to properly layout the detail investigations and results of the research work. The background, problem statement, motivation and objective are presented in Chapter 1 with a summary of the thesis outline.

Chapter 2 is first briefly explains the general background of different type energy harvesting system. It follows by briefly explained on antenna theory and providing the review of existing RF energy harvesting antenna. The literature review