



UNIVERSITI SAINS MALAYSIA

**Peperiksaan Semester Kedua
Sidang Akademik 2000/2001**

Februari/Mac 2001

ESA 241 – Termodinamik Aeroangkasa

Masa : [3 Jam]

ARAHAN KEPADA CALON :

1. Sila pastikan bahawa kertas peperiksaan ini mengandungi **TUJUH** mukasurat bercetak termasuk lampiran dan **ENAM** soalan.
2. Jawab **EMPAT** soalan. **DUA** soalan dari Bahagian A dan **DUA** soalan dari Bahagian B.
3. Agihan markah bagi setiap soalan diberikan di sisi sebelah kanan.
4. Anda dibenarkan menjawab dalam Bahasa Inggeris dan sekurang-kurangnya satu soalan mestilah dijawab dalam Bahasa Melayu.
5. Mesin kira yang bukan boleh diprogramkan boleh digunakan.

BAHAGIAN A/SECTION A

1. (a) Sebuah janakuasa tetap beroperasi pada kitar Brayton unggul dengan nisbah tekanannya ialah 8. Suhu gas adalah 300K di kemasukan pemampat dan 1300K di kemasukan turbin. Dengan menggunakan andaian udara piaawai, peroleh;

A stationary power plant operating on an ideal Brayton cycle has a pressure ratio of 8. The gas temperature is 300K at the compressor inlet and 1300K at the turbine inlet. Utilizing the air-standard assumptions, determine

- (i) Suhu gas di bahagian keluaran pemampat dan turbin.
The gas temperature at the exits of the compressor and the turbine.
- (ii) Nisbah kerja kembali.
The back work ratio
- (iii) Kecekapan haba turbin gas janakuasa.
The thermal efficiency of the gas-turbine power plant

(13 markah/marks)

- (b) Dengan mengandaikan kecekapan pemampat ialah 80% dan kecekapan turbin ialah 85%, peroleh,

Assuming a compressor efficiency of 80% and a turbine efficiency of 85%, determine,

- (i) Nisbah kerja kembali.
The back work ratio.
- (ii) Kecekapan haba loji turbin gas.
The thermal efficiency of the gas turbine plant.
- (iii) Suhu keluar turbin untuk stesyen janakuasa turbin gas.
The turbine exit temperature of the gas-turbine power plant.

(12 markah/marks)

2. (a) Sebuah pendingin menggunakan bahan pendingin -134a sebagai bendalir bekerja dan beroperasi pada kitar pendingin pemampat unggul antara 0.14 dan 0.8 MPa. Jika kadar alir jisim bahan pendingin ialah 0.05kg/s, peroleh,

A refrigerator uses refrigerant - 134a as the working fluid and operates on an ideal vapor-compression refrigeration cycle between 0.14 and 0.8 MPa. If the mass flow rate of the refrigerant is 0.05kg/s, determine,

- (i) Kadar penyingkiran haba daripada ruang pendingin dan kemasukan kuasa kepada pemampat.
The rate of heat removal from the refrigerated space and the power input to the compressor

(8 markah/marks)

- (ii) Kadar penolakan haba kepada persekitaran.
The rate of heat rejection to the environment.

(8 markah/marks)

- (iii) Nilai COP pendingin.
The COP of the refrigerator

(9 markah/marks)

3. (a) Stim memasuki sebuah muncung menumpu pada 2 MPa dan 400°C dengan halaju bersamaan dengan sifar dan kadar alir jisim ialah 2.5 kg/s, dan ia keluar pada tekanan 300kPa. Aliran ialah isentropik antara kemasukan muncung dan kerongkong, dan kecekapan muncung keseluruhan ialah 93 peratus. Peroleh

Steam enters a converging-diverging nozzle at 2 MPa and 400°C with a velocity equal to zero and a mass flow rate of 2.5 kg/s, and it exits at a pressure of 300kPa. The flow is isentropic between the nozzle entrance and the throat, and the overall nozzle efficiency is 93 percent. Determine

- (i) Luas kawasan kerongkong muncung.
The throat area of the nozzle

(8 markah/marks)

- (ii) Luas kawasan keluar di muncung.
The exit area of the nozzle.

(8 markah/marks)

- (iii) Nombor Mach di kerongkong dan di keluar muncung.
The Mach number at the throat and the nozzle exit.

(9 markah/marks)

BAHAGIAN B/SECTION B

4. (a) Untuk mengukur keberaliran haba berkesan untuk bahan kaca legap untuk sebuah dinding ujian kapal terbang, sebagai kelompok sfera dengan jejari dalaman 26cm dan jejari luaran 34cm dibina dan sebuah mentol elektrik 100 watt yang diletakkan di tengah. Di keadaan mantap, suhu-suhu di dalaman dan luar permukaan adalah 339K and 311K, masing-masing. Apakah keberaliran berkesan bahan tersebut?

To measure the effective thermal conductivity of an opaque glass material for an aircraft test wall, as spherical shell of inner radius 26cm and outer radius 34cm was constructed and a 100 watt electric light bulb placed in the center. At steady state, the temperatures of the inner and outer surfaces were measured to be 339K and 311K, respectively. What is the effective conductivity of the material?

(13 markah/ marks)

- (b) Di bahagian luar wayar kuperam yang mempunyai garispusat 2mm didedahkan kepada persekitaran lazim dengan pekali perpindahan haba olakan $5000 \text{ W/m}^2 \text{ K}$ dan suhu persekitaran 100°C . Apakah arus yang mesti dialirkan melalui wayar untuk menghasilkan suhu pusat 150°C ? Voltan ialah 240 volts dan pekali perpindahan haba pengaliran kuperam ialah 385 W/m K .

The outside of copper wire having a diameter of 2mm is exposed to a convention environment with the convection heat - transfer coefficient $5000 \text{ W/m}^2 \text{ K}$ and environment temperature 100°C . What current must be passed thought the wire to produce a center temperature of 150°C ? The voltage is 240 volts and the copper conduction heat-transfer coefficient is 385 W/m K .

(12 markah/marks)

5. (a) Satu sfera keluli tahan karat dengan garis pusat 25mm disenggara pada suhu permukaan 50°C dan didekahkan kepada suhu udara pada 27°C .

A stainless-steel sphere with 25mm diameter is maintained at a surface temperature of 50°C and exposed to air at temperature of 27°C .

- (i) Kirakan kadar perpindahan haba.
Calculate the rate of heat transfer.

(13 markah/marks)

- (ii) Jika sfera didekahkan kepada air pada suhu of 27°C . Kirakan kadar perpindahan haba.
Suppose the sphere is exposed to water at temperature of 27°C . Calculate the rate of heat-transfer.

(12 markah/marks)

6. Dua planar selari 1.2 kali 1.2m dipisahkan dengan jarak 1.2m. Keberpancahan planar adalah 0.4 and 0.6, suhu adalah 760°C and 300°C , masing-masing. Satu perisai sinaran 1.2 kali 1.2m dengan keberpancahan 0.05 di kedua-dua belah berada sama jarak antara kedua-dua planar. Aturan gabungan ini diletakkan dalam sebuah bilik besar, yang disenggara pada 40°C . Kira,

Two parallel planes 1.2 by 1.2m are separated by a distance of 1.2m. The emissivity of the planes are 0.4 and 0.6, and the temperatures are 760°C and 300°C , respectively. A 1.2 by 1.2m radiation shield having an emissivity of 0.05 on both sides is located equidistance between the two planes. The combined arrangement is placed in a large room, which is maintained at 40°C . Calculate,

- (i) Kadar perpindahan haba daripada setiap dua planar tersebut jika tiada pelindung.

The heat transfer rate from each of the two planes if the shield were not present.

(8 markah/marks)

- 6 -

- (ii) Kadar perpindahan haba daripada setiap dua planar tersebut jika ada pelindung.

The heat transfer rate from each of the two planes with the shield present.

(8 markah/marks)

- (iii) Suhu pelindung.

The temperature of the shield.

(9 markah/marks)

000000000

APPENDIX

Appendix ini terdiri daripada jadual-jadual berikut dan maklumat yang diberi
This appendix consists of the following tables and given information

1. Jadual udara untuk ciri-ciri gas unggul/*Ideal-gas properties of air tables*
2. Bahan pendingin Jadual 134a/*Refrigerant-134a table*
3. Jadual stim/*Steam table*
4. Jadual ciri-ciri udara pada tekanan atmosfera/*Properties of Air at atmospheric pressure table*
 Jadual ciri-ciri fizikal haba air tepu/*Thermo physical properties of saturated water table*
5. Faktor bentuk sinaran untuk sinaran antara empatsegi selari/*Radiation shape factor for radiation between parallel rectangles.*

Maklumat Yang Diberi/*Given Information*

Persamaan perpindahan haba untuk olakan paksa melintasi sfera
Heat-transfer equations for forced convection across sphere.

1. Untuk Udara/*FOR AIR* $N_u = \frac{hd}{K} = 2.0 + 0.43 (Gr.Pr)^{1/4}$

2. Untuk air /*FOR WATER* $N_u = 2.0 + 0.5 (Gr.Pr)^{1/4} = \frac{h.d}{K}$

Iaitu/Where : Gr = Nombor Grashof/*Grashof number* = $\frac{g\beta(T_w - T_\infty).d^3}{\nu^2}$

- ν = Kelikatan kinematik/*Kinematic viscosity* = μ / ρ
 μ = Kelikatan dinamik/*Dynamic viscosity* (kg / ms)
 ρ = Ketumpatan/*Density* (kg / m³)
 Pr = Nombor Prandtl/*Prandtl number* = $C_p \mu / k$

Pecutan graviti piawai/*Standard gravitational acceleration* = g = 9.8067 m/s²
 Pekali Stefan-Boltzmann/*Stefan-Boltzmann constant* (σ) = 5.669×10^{-8} W / m² K⁴
 Keupayaan haba tentu air/*Water specific heat capacity* C_p = 4.181 kJ / kg K
 Berat molekul udara /*Air molecular weight* = 29.92
 Berat molekul air/*Water molecular weight* = 18.01
 Pekali gas malar/*Universal gas constant* = 8.314 kJ / kmol. K
 1 atm. = 1.01325×10^5 N / M²

APPENDIX

This appendix consists of the following tables and given information,

1. Ideal-gas properties of air tables
2. Refrigerant-134a tables
3. Steam tables
4. Properties of Air at atmospheric pressure table
Thermo physical properties of saturated water table
5. Radiation shape factor for radiation between parallel rectangles.

Given information

Heat-transfer equations for forced convection across sphere.

1. FOR AIR $Nu = \frac{hd}{K} = 2.0 + 0.43(Gr.Pr)^{1/4}$

2. FOR WATER $Nu = 2.0 + 0.5(Gr.Pr)^{1/4} = \frac{h.d}{K}$

Where: Gr = Grashof number = $\frac{g\beta(T_w - T_\infty)d^3}{\nu^2}$

ν = Kinematic viscosity = μ/ρ

μ = Dynamic viscosity (kg / ms)

ρ = Density (kg / m³)

Pr = Prandtl number = $C_p \mu / k$

Standard gravitational acceleration = g = 9.8067 m/ s²

Stefan-Boltzmann constant (σ) = 5.669×10^{-8} W / m² K⁴


Water specific heat capacity C_p = 4.181 kJ / kg K

Air molecular weight = 29.92

Water molecular weight = 18.01

Universal gas constant = 8.314 kJ/kmol. K

1 atm. = 1.01325×10^5 N/ m²

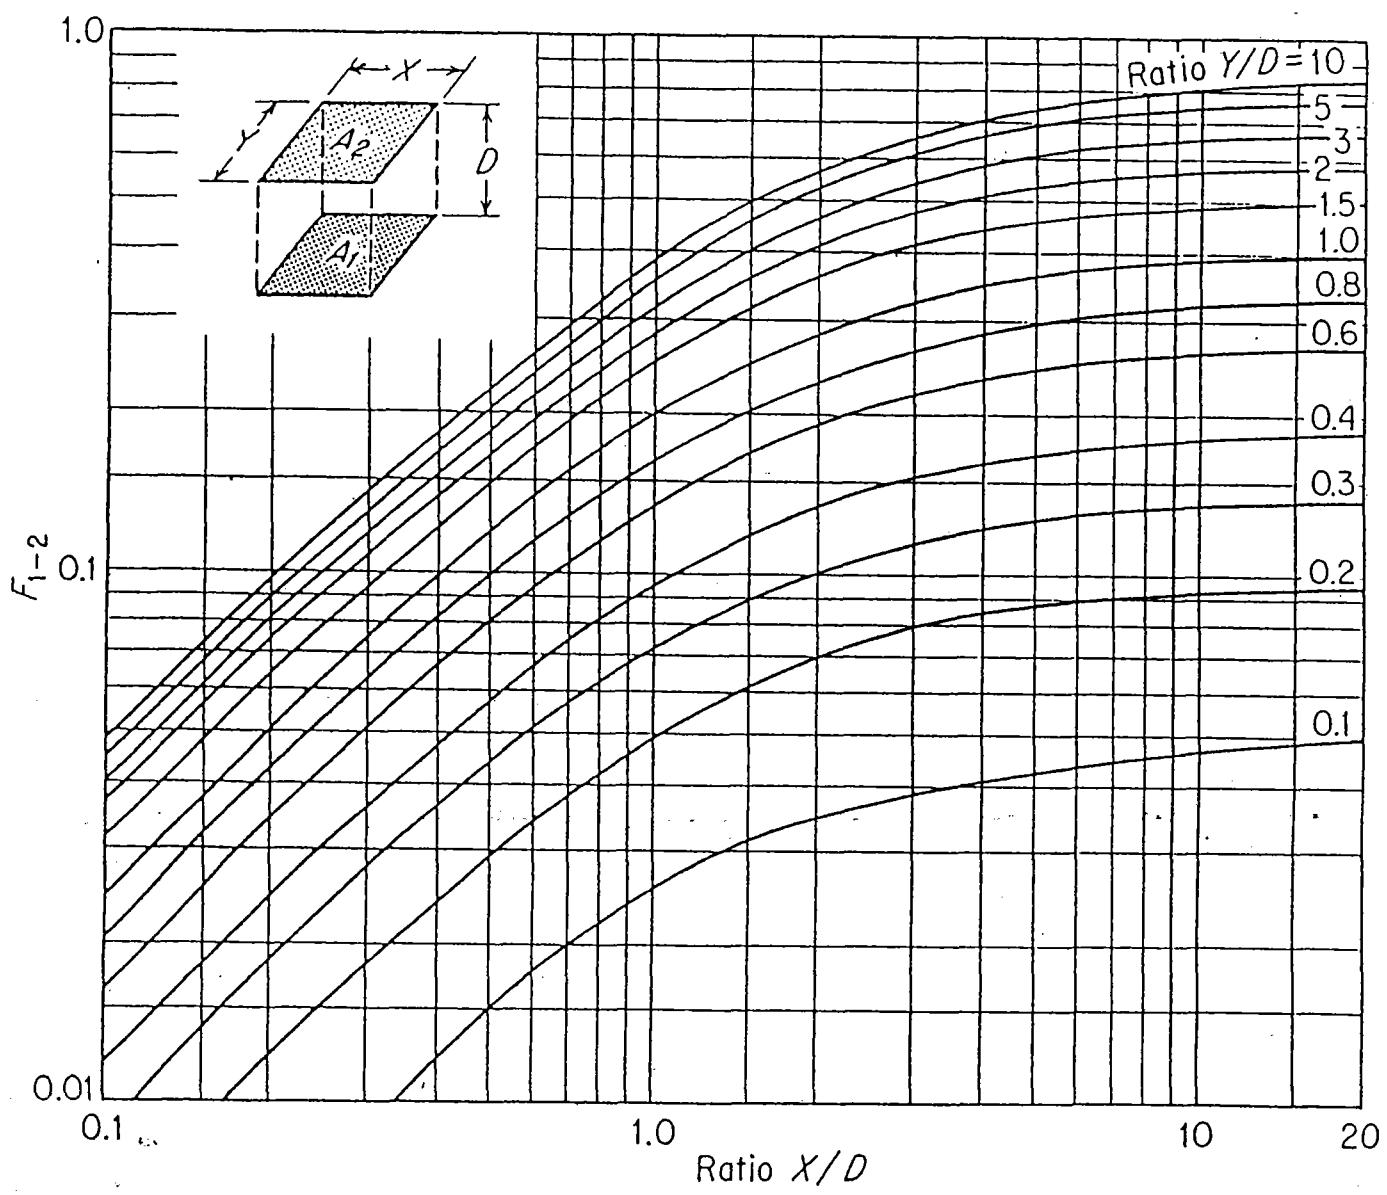

RADIATION SHAPE FACTOR FOR RADIATION BETWEEN PARALLEL RECTANGLES.

Ideal-gas properties of air

<i>T</i> K	<i>h</i> kJ/kg	<i>P</i> r	<i>u</i> kJ/kg	<i>v_r</i>	<i>s^a</i> kJ/(kg · K)	<i>T</i> K	<i>h</i> kJ/kg	<i>P</i> r	<i>u</i> kJ/kg	<i>v_r</i>	<i>s^a</i> kJ/(kg · K)
200	199.97	0.3363	142.56	1707.0	1.29559	580	586.04	14.38	419.55	115.7	2.37348
210	209.97	0.3987	149.69	1512.0	1.34444	590	596.52	15.31	427.15	110.6	2.39140
220	219.97	0.4690	156.82	1346.0	1.39105	600	607.02	16.28	434.78	105.8	2.40902
230	230.02	0.5477	164.00	1205.0	1.43557	610	617.53	17.30	442.42	101.2	2.42644
240	240.02	0.6355	171.13	1084.0	1.47824	620	628.07	18.36	450.09	96.92	2.44356
250	250.05	0.7329	178.28	979.0	1.51917	630	683.63	19.84	457.78	92.84	2.46048
260	260.09	0.8405	185.45	887.8	1.55848	640	649.22	20.64	465.50	88.99	2.47716
270	270.11	0.9590	192.60	808.0	1.59634	650	659.84	21.86	473.25	85.34	2.49364
280	280.13	1.0889	199.75	738.0	1.63279	660	670.47	23.13	481.01	81.89	2.50985
285	285.14	1.1584	203.33	706.1	1.65055	670	681.14	24.46	488.81	78.61	2.52589
290	290.16	1.2311	206.91	676.1	1.66802	680	691.82	25.85	496.62	75.50	2.54175
295	295.17	1.3068	210.49	647.9	1.68515	690	702.52	27.29	504.45	72.56	2.55
300	300.19	1.3860	214.07	621.2	1.70203	700	713.27	28.80	512.33	69.76	2.57
305	305.22	1.4686	217.67	596.0	1.71865	710	724.04	30.38	520.23	67.07	2.58810
310	310.24	1.5546	221.25	572.3	1.73498	720	734.82	32.02	528.14	64.53	2.60319
315	315.27	1.6442	224.85	549.8	1.75106	730	745.62	33.72	536.07	62.13	2.61803
320	320.29	1.7375	228.42	528.6	1.76690	740	756.44	35.50	544.02	59.82	2.63280
325	325.31	1.8345	232.02	508.4	1.78249	750	767.29	37.35	551.99	57.63	2.64737
330	330.34	1.9352	235.61	489.4	1.79783	760	778.18	39.27	560.01	55.54	2.66176
340	340.42	2.149	242.82	454.1	1.82790	780	800.03	43.35	576.12	51.64	2.69013
350	350.49	2.379	250.02	422.2	1.85708	800	821.95	47.75	592.30	48.08	2.71787
360	360.58	2.626	257.24	393.4	1.88543	820	843.98	52.59	608.59	44.84	2.74504
370	370.67	2.892	264.46	367.2	1.91313	840	866.08	57.60	624.95	41.85	2.77170
380	380.77	3.176	271.69	343.4	1.94001	860	888.27	63.09	641.40	39.12	2.79783
390	390.88	3.481	278.93	321.5	1.96633	880	910.56	68.98	657.95	36.61	2.82344
400	400.98	3.806	286.16	301.6	1.99194	900	932.93	75.29	674.58	34.31	2.84856
410	411.12	4.153	293.43	283.3	2.01699	920	955.38	82.05	691.28	32.18	2.87324
420	421.26	4.522	300.69	266.6	2.04142	940	977.92	89.28	708.08	30.22	2.89748
430	431.43	4.915	307.99	251.1	2.06533	960	1000.55	97.00	725.02	28.40	2.92128
440	441.61	5.332	315.30	236.8	2.08870	980	1023.25	105.2	741.98	26.73	2.94
450	451.80	5.775	322.62	223.6	2.11161	1000	1046.04	114.0	758.94	25.17	2.96
460	462.02	6.245	329.97	211.4	2.13407	1020	1068.89	123.4	776.10	23.72	2.99034
470	472.24	6.742	337.32	200.1	2.15604	1040	1091.85	133.3	793.36	23.29	3.01260
480	482.49	7.268	344.70	189.5	2.17760	1060	1114.86	143.9	810.62	21.14	3.03449
490	492.74	7.824	352.08	179.7	2.19876	1080	1137.89	155.2	827.88	19.98	3.05608
500	503.02	8.411	359.49	170.6	2.21952	1100	1161.07	167.1	845.33	18.896	3.07732
510	513.32	9.031	366.92	162.1	2.23993	1120	1184.28	179.7	862.79	17.886	3.09825
520	523.63	9.684	374.36	154.1	2.25997	1140	1207.57	193.1	880.35	16.946	3.11883
530	533.98	10.37	381.84	146.7	2.27967	1160	1230.92	207.2	897.91	16.064	3.13916
540	544.35	11.10	389.34	139.7	2.29906	1180	1254.34	222.2	915.57	15.241	3.15916
550	555.74	11.86	396.86	133.1	2.31809	1200	1277.79	238.0	933.33	14.470	3.17888
560	565.17	12.66	404.42	127.0	2.33685	1220	1301.31	254.7	951.09	13.747	3.19834
570	575.59	13.50	411.97	121.2	2.35531	1240	1324.93	272.3	968.95	13.069	3.21751

Ideal-gas properties of air (Concluded)

T K	h kJ/kg	P Pa	u kJ/kg	v _r	s ^o kJ/(kg · K)	T K	h kJ/kg	P Pa	u kJ/kg	v _r	s ^o kJ/(kg · K)
1260	1348.55	290.8	986.90	12.435	3.23638	1600	1757.57	791.2	1298.30	5.804	3.52364
1280	1372.24	310.4	1004.76	11.835	3.25510	1620	1782.00	834.1	1316.96	5.574	3.53879
1300	1395.97	330.9	1022.82	11.275	3.27345	1640	1806.46	878.9	1335.72	5.355	3.55381
1320	1419.76	352.5	1040.88	10.747	3.29160	1660	1830.96	925.6	1354.48	5.147	3.56867
1340	1443.60	375.3	1058.94	10.247	3.30959	1680	1855.50	974.2	1373.24	4.949	3.58335
1360	1467.49	399.1	1077.10	9.780	3.32724	1700	1880.1	1025	1392.7	4.761	3.5979
1380	1491.44	424.2	1095.26	9.337	3.34474	1750	1941.6	1161	1439.8	4.328	3.6336
1400	1515.42	450.5	1113.52	8.919	3.36200	1800	2003.3	1310	1487.2	3.994	3.6684
1420	1539.44	478.0	1131.77	8.526	3.37901	1850	2065.3	1475	1534.9	3.601	3.7023
1440	1563.51	506.9	1150.13	8.153	3.39586	1900	2127.4	1655	1582.6	3.295	3.7354
1460	1587.63	537.1	1168.49	7.801	3.41247	1950	2189.7	1852	1630.6	3.022	3.7677
1480	1611.79	568.8	1186.95	7.468	3.42892	2000	2252.1	2068	1678.7	2.776	3.7994
1500	1635.97	601.9	1205.41	7.152	3.44516	2050	2314.6	2303	1726.8	2.555	3.8303
1520	1660.23	636.5	1223.87	6.854	3.46120	2100	2377.7	2559	1775.3	2.356	3.8605
1540	1684.51	672.8	1242.43	6.569	3.47712	2150	2440.3	2837	1823.8	2.175	3.8901
1560	1708.82	710.5	1260.99	6.301	3.49276	2200	2503.2	3138	1872.4	2.012	3.9191
1580	1733.17	750.0	1279.65	6.046	3.50829	2250	2566.4	3464	1921.3	1.864	3.9474

Saturated water—Pressure table (Concluded)

Press., P MPa	Specific volume, m ³ /kg			Internal energy, kJ/kg			Enthalpy, kJ/kg			Entropy, kJ/(kg · K)		
	Sat. temp., T _{sat} °C	Sat. liquid, v _f	Sat. vapor, v _g	Sat. liquid, u _f	Evap., u _{fg}	Sat. vapor, u _g	Sat. liquid, h _f	Evap., h _{fg}	Sat. vapor, h _g	Sat. liquid, s _f	Evap., s _{fg}	Sat. vapor, s _g
1.40	195.07	0.001149	0.14084	828.70	1764.1	2592.8	830.30	1957.7	2790.0	2.2842	4.1850	6.4693
1.50	198.32	0.001154	0.13177	843.16	1751.3	2594.5	844.89	1947.3	2792.2	2.3150	4.1298	6.4448
1.75	205.76	0.001166	0.11349	876.46	1721.4	2597.8	878.50	1917.9	2796.4	2.3851	4.0044	6.3896
2.00	212.42	0.001177	0.09963	906.44	1693.8	2600.3	908.79	1890.7	2799.5	2.4474	3.8935	6.3409
2.25	218.45	0.001187	0.08875	933.83	1668.2	2602.0	936.49	1865.2	2801.7	2.5035	3.7937	6.2972
2.5	223.99	0.001197	0.07998	959.11	1644.0	2603.1	962.11	1841.0	2803.1	2.5547	3.7028	6.2575
3.0	233.90	0.001217	0.06668	1004.78	1599.3	2604.1	1008.42	1795.7	2804.2	2.6457	3.5412	6.1869
3.5	242.60	0.001235	0.05707	1045.43	1558.3	2603.7	1049.75	1753.7	2803.4	2.7253	3.4000	6.1253
4	250.40	0.001252	0.04978	1082.31	1520.0	2602.3	1087.31	1714.1	2801.4	2.7964	3.2737	6.0701
5	263.99	0.001286	0.03944	1147.81	1449.3	2597.1	1154.23	1640.1	2794.3	2.9202	3.0532	5.9734
6	275.64	0.001319	0.03244	1205.44	1384.3	2589.7	1213.35	1571.0	2784.3	3.0267	2.8625	5.8892
7	285.88	0.001351	0.02737	1257.55	1323.0	2580.5	1267.00	1505.1	2772.1	3.1211	2.6922	5.8133
8	295.06	0.001384	0.02352	1305.57	1264.2	2569.8	1316.64	1441.3	2758.0	3.2068	2.5364	5.7432
9	303.40	0.001418	0.02048	1350.51	1207.3	2557.8	1363.26	1378.9	2742.1	3.2858	2.3915	5.6722
10	311.06	0.001452	0.018026	1393.04	1151.4	2544.4	1407.56	1317.1	2724.7	3.3596	2.2544	5.6141
11	318.15	0.001489	0.015987	1433.7	1096.0	2529.8	1450.1	1255.5	2705.6	3.4295	2.1233	5.5527
12	324.75	0.001527	0.014263	1473.0	1040.7	2513.7	1491.3	1193.3	2684.9	3.4962	1.9962	5.4924
13	330.93	0.001567	0.012780	1511.1	985.0	2496.1	1531.5	1130.7	2662.2	3.5606	1.8718	5.4323
14	336.75	0.001611	0.011485	1548.6	928.2	2476.8	1571.1	1066.5	2637.6	3.6232	1.7485	5.3717
15	342.24	0.001658	0.010337	1585.6	869.8	2455.5	1610.5	1000.0	2610.5	3.6848	1.6249	5.3098
16	347.44	0.001711	0.009306	1622.7	809.0	2431.7	1650.1	930.6	2580.6	3.7461	1.4994	5.2455
17	352.37	0.001770	0.008364	1660.2	744.8	2405.0	1690.3	856.9	2547.2	3.8079	1.3698	5.1777
18	357.06	0.001840	0.007489	1698.9	675.4	2374.3	1732.0	777.1	2509.1	3.8715	1.2329	5.1044
19	361.54	0.001924	0.006657	1739.9	598.1	2338.1	1776.5	688.0	2464.5	3.9388	1.0839	5.0228
20	365.81	0.002036	0.005834	1785.6	507.5	2293.0	1826.3	583.4	2409.7	4.0139	0.9130	4.9269
21	369.89	0.002207	0.004952	1842.1	388.5	2230.6	1888.4	446.2	2334.6	4.1075	0.6938	4.8013
22	373.80	0.002742	0.003568	1961.9	125.2	2087.1	2022.2	143.4	2165.6	4.3110	0.2216	4.5327
22.09	374.14	0.003155	0.003155	2029.6	0	2029.6	2099.3	0	2099.3	4.4298	0	4.4298

H₂O

Saturated water—Temperature table

Temp., T°C	Sat. press., P _{sat} kPa	Specific volume, m ³ /kg		Internal energy, kJ/kg			Enthalpy, kJ/kg		Entropy, kJ/(kg · K)		
		Sat. liquid, v _f	Sat. vapor, v _g	Sat. liquid, u _f	Evap., u _{fg}	Sat. vapor, u _g	Sat. liquid, h _f	Evap., h _{fg}	Sat. vapor, h _g	Sat. liquid, s _f	Sat. vapor, s _{fg}
0.01	0.6113	0.001000	206.14	0.0	2375.3	2375.3	0.01	2501.3	2501.4	0.000	9.1562
5	0.8721	0.001000	147.12	20.97	2361.3	2382.3	20.98	2489.6	2510.6	0.0761	8.9496
10	1.2276	0.001000	106.38	42.00	2347.2	2389.2	42.01	2477.7	2519.8	0.1510	8.7498
15	1.7051	0.001001	77.93	62.99	2333.1	2396.1	62.99	2465.9	2528.9	0.2245	8.5569
20	2.339	0.001002	57.79	83.95	2319.0	2402.9	83.96	2454.1	2538.1	0.2966	8.3706
25	3.169	0.001003	43.36	104.88	2304.9	2409.8	104.89	2442.3	2547.2	0.3674	8.1905
30	4.246	0.001004	32.89	125.78	2290.8	2416.6	125.79	2430.5	2556.3	0.4369	8.0164
35	5.628	0.001006	25.22	146.67	2276.7	2423.4	146.68	2418.6	2565.3	0.5053	7.8478
40	7.384	0.001008	19.52	167.56	2262.6	2430.1	167.57	2406.7	2574.3	0.5725	7.6845
45	9.593	0.001010	15.26	188.44	2248.4	2436.8	188.45	2394.8	2583.2	0.6387	7.5261
50	12.349	0.001012	12.03	209.32	2234.2	2443.5	209.33	2382.7	2592.1	0.7038	7.3725
55	15.758	0.001015	9.568	230.21	2219.9	2450.1	230.23	2370.7	2600.9	0.7679	7.2234
60	19.940	0.001017	7.671	251.11	2205.5	2456.6	251.13	2358.5	2609.6	0.8312	7.0784
65	25.03	0.001020	6.197	272.02	2191.1	2463.1	272.06	2346.2	2618.3	0.8935	6.9375
70	31.19	0.001023	5.042	292.95	2176.6	2469.6	292.98	2333.8	2626.8	0.9549	6.8004
75	38.58	0.001026	4.131	313.90	2162.0	2475.9	313.93	2321.4	2635.3	1.0155	6.6669
80	47.39	0.001029	3.407	334.86	2147.4	2482.2	334.91	2308.8	2643.7	1.0753	6.5369
85	57.83	0.001033	2.828	355.84	2132.6	2488.4	355.90	2296.0	2651.9	1.1343	6.4102
90	70.14	0.001036	2.361	376.85	2117.7	2494.5	376.92	2283.2	2660.1	1.1925	6.2866
95	84.55	0.001040	1.982	397.88	2102.7	2500.6	397.96	2270.2	2668.1	1.2500	6.1659
Sat. press., MPa											
100	0.10135	0.001044	1.6729	418.94	2087.6	2506.5	419.04	2257.0	2676.1	1.3069	6.0480
105	0.12082	0.001048	-1.4194	440.02	2072.3	2512.4	440.15	2243.7	2683.8	1.3630	5.9328
110	0.14327	0.001052	1.2102	461.14	2057.0	2518.1	461.30	2230.2	2691.5	1.4185	5.8202
115	0.16906	0.001056	1.0366	482.30	2041.4	2523.7	482.48	2216.5	2699.0	1.4734	5.7100
120	0.19853	0.001060	0.8919	503.50	2025.8	2529.3	503.71	2202.6	2706.3	1.5276	5.6020
125	0.2321	0.001065	0.7706	524.74	2009.9	2534.6	524.99	2188.5	2713.5	1.5813	5.4962
130	0.2701	0.001070	0.6685	546.02	1993.9	2539.9	546.31	2174.2	2720.5	1.6344	5.3925
135	0.3130	0.001075	0.5822	567.35	1977.7	2545.0	567.69	2159.6	2727.3	1.6870	5.2907
140	0.3613	0.001080	0.5089	588.74	1961.3	2550.0	589.13	2144.7	2733.9	1.7391	5.1908
145	0.4154	0.001085	0.4463	610.18	1944.7	2554.9	610.63	2129.6	2740.3	1.7907	5.0926
150	0.4758	0.001091	0.3928	631.68	1927.9	2559.5	632.20	2114.3	2746.5	1.8418	4.9960
155	0.5431	0.001096	0.3468	653.24	1910.8	2564.1	653.84	2098.6	2752.4	1.8925	4.9010
160	0.6178	0.001102	0.3071	674.87	1893.5	2568.4	675.55	2082.6	2758.1	1.9427	4.8075
165	0.7005	0.001108	0.2727	696.56	1876.0	2572.5	697.34	2066.2	2763.5	1.9925	4.7153
170	0.7917	0.001114	0.2428	718.33	1858.1	2576.5	719.21	2049.5	2768.7	2.0419	4.6244
175	0.8920	0.001121	0.2168	740.17	1840.0	2580.2	741.17	2032.4	2773.6	2.0909	4.5347
180	1.0021	0.001127	0.19405	762.09	1821.6	2583.7	763.22	2015.0	2778.2	2.1396	4.4461
185	1.1227	0.001134	0.17409	784.10	1802.9	2587.0	785.37	1997.1	2782.4	2.1879	4.3586
190	1.2544	0.001141	0.15654	806.19	1783.8	2590.0	807.62	1978.8	2786.4	2.2359	4.2720
195	1.3978	0.001149	0.14105	828.37	1764.4	2592.8	829.98	1960.0	2790.0	2.2835	4.1863

Saturated water—Temperature table (*Concluded*)

Temp., °C	Specific volume, m ³ /kg		Internal energy, kJ/kg			Enthalpy, kJ/kg			Entropy, kJ/(kg · K)			
	Sat. Temp., press., P _{sat} , MPa	Sat. liquid, v _f	Sat. vapor, v _g	Sat. liquid, u _f	Evap., u _{fg}	Sat. vapor, u _g	Sat. liquid, h _f	Evap., h _{fg}	Sat. vapor, h _g	Sat. liquid, s _f	Evap., s _{fg}	Sat. vapor, s _g
200	1.5538	0.001157	0.12736	850.65	1744.7	2595.3	852.45	1940.7	2793.2	2.3309	4.1014	6.4323
205	1.7230	0.001164	0.11521	873.04	1724.5	2597.5	875.04	1921.0	2796.0	2.3780	4.0172	6.3952
210	1.9062	0.001173	0.10441	895.53	1703.9	2599.5	897.76	1900.7	2798.5	2.4248	3.9337	6.3585
215	2.104	0.001181	0.09479	918.14	1682.9	2601.1	920.62	1879.9	2800.5	2.4714	3.8507	6.3221
220	2.318	0.001190	0.08619	940.87	1661.5	2602.4	943.62	1858.5	2802.1	2.5178	3.7683	6.2861
225	2.548	0.001199	0.07849	963.73	1639.6	2603.3	966.78	1836.5	2803.3	2.5639	3.6863	6.2503
230	2.795	0.001209	0.07158	986.74	1617.2	2603.9	990.12	1813.8	2804.0	2.6099	3.6047	6.2146
235	3.060	0.001219	0.06537	1009.89	1594.2	2604.1	1013.62	1790.5	2804.2	2.6558	3.5233	6.1791
240	3.344	0.001229	0.05976	1033.21	1570.8	2604.0	1037.32	1766.5	2803.8	2.7015	3.4422	6.1437
245	3.648	0.001240	0.05471	1056.71	1546.7	2603.4	1061.23	1741.7	2803.0	2.7472	3.3612	6.1083
250	3.973	0.001251	0.05013	1080.39	1522.0	2602.4	1085.36	1716.2	2801.5	2.7927	3.2802	6.0730
255	4.319	0.001263	0.04598	1104.28	1596.7	2600.9	1109.73	1689.8	2799.5	2.8383	3.1992	6.0375
260	4.688	0.001276	0.04221	1128.39	1470.6	2599.0	1134.37	1662.5	2796.9	2.8838	3.1181	6.0019
265	5.081	0.001289	0.03877	1152.74	1443.9	2596.6	1159.28	1634.4	2793.6	2.9294	3.0368	5.9662
270	5.499	0.001302	0.03564	1177.36	1416.3	2593.7	1184.51	1605.2	2789.7	2.9751	2.9551	5.9301
275	5.942	0.001317	0.03279	1202.25	1387.9	2590.2	1210.07	1574.9	2785.0	3.0208	2.8730	5.8938
280	6.412	0.001332	0.03017	1227.46	1358.7	2586.1	1235.99	1543.6	2779.6	3.0668	2.7903	5.8571
285	6.909	0.001348	0.02777	1253.00	1328.4	2581.4	1262.31	1511.0	2773.3	3.1130	2.7070	5.8199
290	7.436	0.001366	0.02557	1278.92	1297.1	2576.0	1289.07	1477.1	2766.2	3.1594	2.6227	5.7821
295	7.993	0.001384	0.02354	1305.2	1264.7	2569.9	1316.3	1441.8	2758.1	3.2062	2.5375	5.7437
300	8.581	0.001404	0.02167	1332.0	1231.0	2563.0	1344.0	1404.9	2749.0	3.2534	2.4511	5.7045
305	9.202	0.001425	0.019948	1359.3	1195.9	2555.2	1372.4	1366.4	2738.7	3.3010	2.3633	5.6643
310	9.856	0.001447	0.018350	1387.1	1159.4	2546.4	1401.3	1326.0	2727.3	3.3493	2.2737	5.6230
315	10.547	0.001472	0.016867	1415.5	1121.1	2536.6	1431.0	1283.5	2714.5	3.3982	2.1821	5.5804
320	11.274	0.001499	0.015488	1444.6	1080.9	2525.5	1461.5	1238.6	2700.1	3.4480	2.0882	5.5362
330	12.845	0.001561	0.012996	1505.3	993.7	2498.9	1525.3	1140.6	2665.9	3.5507	1.8909	5.4417
340	14.586	0.001638	0.010797	1570.3	894.3	2464.6	1594.2	1027.9	2622.0	3.6594	1.6763	5.3357
350	16.513	0.001740	0.008813	1641.9	776.6	2418.4	1670.6	893.4	2563.9	3.7777	1.4335	5.2112
360	18.651	0.001893	0.006945	1725.2	626.3	2351.5	1760.5	720.3	2481.0	3.9147	1.1379	5.0526
370	21.03	0.002213	0.004925	1844.0	384.5	2228.5	1890.5	441.6	2332.1	4.1106	0.6865	4.7971
374.14	22.09	0.003155	0.003155	2029.6	0	2029.6	2099.3	0	2099.3	4.4298	0	4.4298

H₂O

13-1342

Superheated refrigerant-134a

Saturated refrigerant-134a—Pressure table

Press., P MPa	Temp., T_{sat} °C	Specific volume, m³/kg		Internal energy, kJ/kg		Enthalpy, kJ/kg			Entropy, kJ/(kg · K)	
		Sat. liquid, v_f	Sat. vapor, v_g	Sat. liquid, u_f	Sat. vapor, u_g	Sat. liquid, h_f	Evap., h_{fg}	Sat. vapor, h_g	Sat. liquid, s_f	Sat. vapor, s_g
0.06	-37.07	0.0007097	0.3100	3.41	206.12	3.46	221.27	224.72	0.0147	0.9520
0.08	-31.21	0.0007184	0.2366	10.41	209.46	10.47	217.92	228.39	0.0440	0.9447
0.10	-26.43	0.0007258	0.1917	16.22	212.18	16.29	215.06	231.35	0.0678	0.9395
0.12	-22.36	0.0007323	0.1614	21.23	214.50	21.32	212.54	233.86	0.0879	0.9354
0.14	-18.80	0.0007381	0.1395	25.66	216.52	25.77	210.27	236.04	0.1055	0.9322
0.16	-15.62	0.0007435	0.1229	29.66	218.32	29.78	208.18	237.97	0.1211	0.9295
0.18	-12.73	0.0007485	0.1098	33.31	219.94	33.45	206.26	239.71	0.1352	0.9273
0.20	-10.09	0.0007532	0.0993	36.69	221.43	36.84	204.46	241.30	0.1481	0.9253
0.24	-5.37	0.0007618	0.0834	42.77	224.07	42.95	201.14	244.09	0.1710	0.9222
0.28	-1.23	0.0007697	0.0719	48.18	226.38	48.39	198.13	246.52	0.1911	0.9197
0.32	2.48	0.0007770	0.0632	53.06	228.43	53.31	195.35	248.66	0.2089	0.9177
0.36	5.84	0.0007839	0.0564	57.54	230.28	57.82	192.76	250.58	0.2251	0.9160
0.4	8.93	0.0007904	0.0509	61.69	231.97	62.00	190.32	252.32	0.2399	0.9145
0.5	15.74	0.0008056	0.0409	70.93	235.64	71.33	184.74	256.07	0.2723	0.9117
0.6	21.58	0.0008196	0.0341	78.99	238.74	79.48	179.71	259.19	0.2999	0.9097
0.7	26.72	0.0008328	0.0292	86.19	241.42	86.78	175.07	261.85	0.3242	0.9080
0.8	31.33	0.0008454	0.0255	92.75	243.78	93.42	170.73	264.15	0.3459	0.9066
0.9	35.53	0.0008576	0.0226	98.79	245.88	99.56	166.62	266.18	0.3656	0.9054
1.0	39.39	0.0008695	0.0202	104.42	247.77	105.29	162.68	267.97	0.3838	0.9043
1.2	46.32	0.0008928	0.0166	114.69	251.03	115.76	155.23	270.99	0.4164	0.9023
1.4	52.43	0.0009159	0.0140	123.98	253.74	125.26	148.14	273.40	0.4453	0.9003
1.6	57.92	0.0009392	0.0121	132.52	256.00	134.02	141.31	275.33	0.4714	0.8982
1.8	62.91	0.0009631	0.0105	140.49	257.88	142.22	134.60	276.83	0.4954	0.8959
2.0	67.49	0.0009878	0.0093	148.02	259.41	149.99	127.95	277.94	0.5178	0.8934
2.5	77.59	0.0010562	0.0069	165.48	261.84	168.12	111.06	279.17	0.5687	0.8854
3.0	86.22	0.0011416	0.0053	181.88	262.16	185.30	92.71	278.01	0.6156	0.8735

R-134a

Properties of Air at Atmospheric Pressure

The values of μ , k , c_p , and \Pr are not strongly pressure-dependent and may be used over a fairly wide range of pressures.

$T, \text{ K}$	ρ kg/m^3	$c_p,$ kJ/kg K	$\mu,$ kg/m s $\times 10^5$	$\nu,$ m^2/s $\times 10^6$	$k,$ W/m K	$\alpha,$ m^2/s $\times 10^4$	\Pr
100	3.6010	1.0266	0.6924	1.923	0.009246	0.02501	0.770
150	2.3675	1.0099	1.0283	4.343	0.013735	0.05745	0.753
200	1.7684	1.0061	1.3289	7.490	0.01809	0.10165	0.739
250	1.4128	1.0053	1.5990	11.31	0.02227	0.15675	0.722
300	1.1774	1.0057	1.8462	15.69	0.02624	0.22160	0.708
350	0.9980	1.0090	2.075	20.76	0.03003	0.2983	0.697
400	0.8826	1.0140	2.286	25.90	0.03365	0.3760	0.689
450	0.7833	1.0207	2.484	31.71	0.03707	0.4222	0.683
500	0.7048	1.0295	2.671	37.90	0.04038	0.5564	0.680
550	0.6423	1.0392	2.848	44.34	0.04360	0.6532	0.680
600	0.5879	1.0551	3.018	51.34	0.04659	0.7512	0.680
650	0.5430	1.0635	3.177	58.51	0.04953	0.8578	0.682
700	0.5030	1.0752	3.332	66.25	0.05230	0.9672	0.684
750	0.4709	1.0856	3.481	73.91	0.05509	1.0774	0.686
800	0.4405	1.0978	3.625	82.29	0.05779	1.1951	0.689
850	0.4149	1.1095	3.765	90.75	0.06028	1.3097	0.692
900	0.3925	1.1212	3.899	99.3	0.06279	1.4271	0.696
950	0.3716	1.1321	4.023	108.2	0.06525	1.5510	0.699
1000	0.3524	1.1417	4.152	117.8	0.06752	1.6779	0.702
1100	0.3204	1.160	4.44	138.6	0.0732	1.969	0.704
1200	0.2947	1.179	4.69	159.1	0.0782	2.251	0.707
1300	0.2707	1.197	4.93	182.1	0.0837	2.583	0.705
1400	0.2515	1.214	5.17	205.5	0.0891	2.920	0.705
1500	0.2355	1.230	5.40	229.1	0.0946	3.262	0.705
1600	0.2211	1.248	5.63	254.5	0.100	3.609	0.705
1700	0.2082	1.267	5.85	280.5	0.105	3.977	0.705
1800	0.1970	1.287	6.07	308.1	0.111	4.379	0.704
1900	0.1858	1.309	6.29	338.5	0.117	4.811	0.704
2000	0.1762	1.338	6.50	369.0	0.124	5.260	0.702
2100	0.1682	1.372	6.72	399.6	0.131	5.715	0.700
2200	0.1602	1.419	6.93	432.6	0.139	6.120	0.707
2300	0.1538	1.482	7.14	464.0	0.149	6.540	0.710
2400	0.1458	1.574	7.35	504.0	0.161	7.020	0.718
2500	0.1394	1.688	7.57	543.5	0.175	7.441	0.730

Thermophysical Properties of Saturated Water

Temper- ature, <i>T</i> (K)	Pressure, <i>P</i> (bars) ^b	Specific Volume (m ³ /kg)		Heat of Vapor- ization, <i>h_{f,g}</i> (kJ/kg)	Specific Heat (kJ/kg · K)		Viscosity (N · s/m ²)		Thermal Conductivity (W/m · K)		Prandtl Number	Surface Tension, <i>σ_{f,g}</i> · 10 ³ (N/m)	Expansion Coeffi- cient, <i>β_{f,g}</i> · 10 ⁶ (K ⁻¹)	Temper- ature, <i>T</i> (K)	
		<i>v_f</i> · 10 ³	<i>v_g</i>		<i>c_{p,f}</i>	<i>c_{p,g}</i>	<i>μ_f</i> · 10 ⁶	<i>μ_g</i> · 10 ⁶	<i>k_f</i> · 10 ³	<i>k_g</i> · 10 ³					
273.15	0.00611	1.000	206.3	2502	4.217	1.854	1750	8.02	569	18.2	12.99	0.815	75.5	-68.05	273.15
275	0.00697	1.000	181.7	2497	4.211	1.855	1652	8.09	574	18.3	12.22	0.817	75.3	-32.74	275
280	0.00990	1.000	130.4	2485	4.198	1.858	1422	8.29	582	18.6	10.26	0.825	74.8	46.04	280
285	0.01387	1.000	99.4	2473	4.189	1.861	1225	8.49	590	18.9	8.81	0.833	74.3	114.1	285
290	0.01917	1.001	69.7	2461	4.184	1.864	1080	8.69	598	19.3	7.56	0.841	73.7	174.0	290
295	0.02617	1.002	51.94	2449	4.181	1.868	959	8.89	606	19.5	6.62	0.849	72.7	227.5	295
300	0.03531	1.003	39.13	2438	4.179	1.872	855	9.09	613	19.6	5.83	0.857	71.7	276.1	300
305	0.04712	1.005	29.74	2426	4.178	1.877	769	9.29	620	20.1	5.20	0.865	70.9	320.6	305
310	0.06221	1.007	22.93	2414	4.178	1.882	695	9.49	628	20.4	4.62	0.873	70.0	361.9	310
315	0.08132	1.009	17.82	2402	4.179	1.888	631	9.69	634	20.7	4.16	0.883	69.2	400.4	315
320	0.1053	1.011	13.98	2390	4.180	1.895	577	9.89	640	21.0	3.77	0.894	68.3	436.7	320
325	0.1351	1.013	11.06	2378	4.182	1.903	528	10.09	645	21.3	3.42	0.901	67.5	471.2	325
330	0.1719	1.016	8.82	2366	4.184	1.911	489	10.29	650	21.7	3.15	0.908	66.6	504.0	330
335	0.2167	1.018	7.09	2354	4.186	1.920	453	10.49	656	22.0	2.88	0.916	65.8	535.5	335
340	0.2713	1.021	5.74	2342	4.188	1.930	420	10.69	660	22.3	2.66	0.925	64.9	566.0	340
345	0.3372	1.024	4.683	2329	4.191	1.941	389	10.89	668	22.6	2.45	0.933	64.1	595.4	345
350	0.4163	1.027	3.846	2317	4.195	1.954	365	11.09	668	23.0	2.29	0.942	63.2	624.2	350
355	0.5100	1.030	3.180	2304	4.199	1.968	343	11.29	671	23.3	2.14	0.951	62.3	652.3	355
360	0.6209	1.034	2.645	2291	4.203	1.983	324	11.49	674	23.7	2.02	0.960	61.4	697.9	360
365	0.7514	1.038	2.212	2278	4.209	1.999	306	11.69	677	24.1	1.91	0.969	60.5	707.1	365
370	0.9040	1.041	1.861	2265	4.214	2.017	289	11.89	679	24.5	1.80	0.978	59.5	728.7	370
373.15	1.0133	1.044	1.679	2257	4.217	2.029	279	12.02	680	24.8	1.76	0.984	58.9	750.1	373.15
375	1.0815	1.045	1.574	2252	4.220	2.036	274	12.09	681	24.9	1.70	0.987	58.6	761	375
380	1.2869	1.049	1.337	2239	4.226	2.057	260	12.29	683	25.4	1.61	0.999	57.6	788	380
385	1.5233	1.053	1.142	2225	4.232	2.080	248	12.49	685	25.8	1.53	1.004	56.6	814	385