

**SHALLOW GROUNDWATER CONTAMINATION EVALUATION AT  
LANDFILL SITES USING GEOPHYSICS, HYDROCHEMISTRY AND  
ISOTOPE HYDROLOGY TECHNIQUES**

**MOHD HAFIZ BIN ZAWAWI**

**UNIVERSITI SAINS MALAYSIA**

**2013**

**SHALLOW GROUNDWATER CONTAMINATION EVALUATION AT  
LANDFILL SITES USING GEOPHYSICS, HYDROCHEMISTRY AND  
ISOTOPE HYDROLOGY TECHNIQUES**

**by**

**MOHD HAFIZ BIN ZAWAWI**

**Thesis submitted in fulfillment of the requirements  
for the degree of  
Doctor of Philosophy**

**JULY 2013**

## ACKNOWLEDGEMENTS

First and foremost, my deepest gratitude goes to my supervisor, Dr. Syafalni for giving me the opportunity to carry out my doctorate research. He has been most kind and caring in guiding me through the entire project in every possible way. My sincere gratitude also goes to Prof. Dr. Ismail Abustan (co-supervisor) for valuable advice and guidance which aided my work greatly.

A special thanks to my parents Hj. Zawawi Itam Osman and Hj. Marhamah Abd Majid for not necessarily only their help in my research but also their advice, companionship and moral support along my entire research.

Next, I would like to thank all the technicians of School of Civil Engineering especially Mr. Halmi, Mr. Nabil, Mr. Zabidi, Mr. Zaini, Mr. Nizam, Mr. Dziauddin, Mdm. Nurul, Mdm. Samsiah, , and Mr. Azuan for their countless help in my entire research.

I would also like to extend my gratitude to Dr. Tadza Abdul Rahman, Mr. Lakam, Mr. Roslanzairi and Mr. Muzamel from Malaysia Nuclear Agencies for conducting Resistivity Imaging Profiling work which is an essential part of my research.

Deep gratitude also goes to Ministry of Science, Technology and Innovation of Malaysia (MOSTI) and USM for providing me all the funds and financial support which made my research possible.

I am also obliged to Anuar Kamarudin, Nor Azalina Rosli, Leong Chung Sum, Ariff Nazri, Sharulniza Ab Hajis, Rohana, Farhana, Farah, Rafini, Aisar, Faisal and Hazreek for their immeasurable aid in my research. Without them, I would have not succeeded in completing my research.

## TABLE OF CONTENT

ACKNOWLEDGEMENT	ii
TABLE OF CONTENT	iii
LIST OF TABLES	ix
LIST OF FIGURES	xi
LIST OF ABBREVIATIONS	xv
LIST OF SYMBOLS	xvii
ABSTRAK	xviii
ABSTRACT	xx
CHAPTER 1 INTRODUCTION	
1.1 Background	1
1.2 Problem Statement	5
1.3 Objectives	7
1.4 Scope of Work	8
1.5 Thesis Outline	8
CHAPTER 2 LITERATURE REVIEW	
2.1 Introduction	10
2.1.1 Waste generation and types of waste	10
2.1.2 Waste disposal site	11
2.1.3 Landfill phase	13
2.2 Leachate	16
2.2.1 Leachate Formation	16
2.2.2 Leachate composition and characteristics	17
2.2.3 Factors Affecting Leachate Quality	19

2.2.4	Factors Affecting Leachate Quantity	21
2.3	Groundwater Formation	23
2.3.1	Groundwater Quantity and Quality	23
2.3.2	Source of Contamination	25
2.3.3	Impact of Leachate on Groundwater	27
2.3.4	Impact of Polluted Groundwater	31
2.4	Geophysical Methods in Determining of Leachate Plume	33
2.4.1	Electrical Resistivity Imaging	33
2.4.1.1	Survey Methods and Electrode Arrays	34
	(a) Wenner Array	34
	(b) Schlumberger Array	35
	(c) Pole-Pole Array	35
	(d) Pole-Dipole Array	36
2.4.2	Electrical Resistivity Method as a Tool in Subsurface Study	37
2.4.2.1	Electrical Resistivity Imaging vs. Borehole	40
2.5	Hydrochemistry Method	43
2.5.1	Physical characteristics	43
2.5.2	Major anions and cations	44
2.5.3	Heavy Metals	45
2.6	Environmental Isotopes	46
2.6.1	Stable Isotopes	49
2.6.2	Standards and Measurements	49
2.6.2.1	Oxygen-18, Deuterium and Carbon-13 in water	49
2.6.3	Environmental Isotopes as a Tool in Groundwater Study	51

2.6.4	Stable Carbon Isotopes in Dissolved Inorganic Carbon (DIC) in Landfill Leachate	53
2.6.5	Stable Isotopes Application of Leachate Contamination in Groundwater and Surface Water	54
2.7	Groundwater Modelling	57
2.7.1	Visual MODFLOW	57
2.7.2	Groundwater Verification using MODFLOW	58
2.7.3	Model Input	61
2.7.4	Model Output	61
CHAPTER 3	METHODOLOGY	
3.1	Introduction	63
3.2	Site Description	63
3.2.1	General Geology	63
3.2.2	Matang Sanitary Landfill	65
3.2.3	Beriah Landfill, Alor Pongsu	68
3.3	Geophysical Method	70
3.3.1	Electrical Resistivity Imaging	70
3.3.1.1	Equipment and Measurements Procedure	71
3.3.1.2	Electrode Arrays	71
3.3.1.3	Resistivity Inversion Procedure	73
3.3.2	Well logging	73
3.3.3	Hydrometer analysis	74
3.3.4	Determination of specific gravity	74
3.4	Sample Acquisition	75
3.4.1	Matang Sanitary Landfill	75
3.4.2	Beriah Landfill, Alor Pongsu	77

3.5	Major Ions Analysis	78
3.5.1	Ion Chromatography (IC)	78
3.6	Determination of Alkalinity by Titration Method	80
3.6.1	Preparation of Standard 0.02N Sodium Carbonate (Na <sub>2</sub> CO <sub>3</sub> ) Solution	81
3.6.2	Preparation of Standard 0.02N Hydrochloric (HCL) Solution	81
3.6.3	Measuring Actual Acid Normality	81
3.6.4	Calculation of Water Samples' Alkalinity	82
3.7	Heavy Metal Determination	82
3.7.1	Induced Coupled Plasma Emission Spectrometers	83
3.8	Isotope Analysis	84
3.8.1	Preparation of Reagents for Precipitation of Barium Carbonate (BaCO <sub>3</sub> ) Sludge for δ <sup>13</sup> C Sampling and sample preparation	84
3.8.1.1	Natrium Hydroxide (NaOH)	84
3.8.1.2	Magnafloc	85
3.8.1.3	Barium Chloride(BaCl <sub>2</sub> )	85
3.8.1.4	Precipitation of Barium Chloride (BaCl <sub>2</sub> ) Sludge in the Field	85
3.9	Groundwater Modelling (MODFLOW)	87
3.9.1	Site Information for Conceptual Model	87
3.9.1.1	Elevation Data	88
3.9.1.2	Geological Data	88
3.9.1.3	Flow properties	90
3.9.1.4	Observation Head	90
3.9.1.5	Flow boundary conditions	91
3.9.2	Transport Simulation Using MODPATH	92
3.9.2.1	Transport Modelling of Sodium	92

## CHAPTER 4 RESULT AND DISCUSSION

4.1	Geophysical Analysis	93
4.1.1	Beriah Landfill 2-D Electrical Resistivity Imaging	94
4.1.2	Beriah Landfill Lithological Cross-section	98
4.1.3	Matang Landfill 2-D Electrical Resistivity Imaging	102
4.1.4	Matang Landfill Lithological Cross-section	105
4.1.5	Particle Size Distribution	107
4.2	Hydrochemistry	110
4.2.1	Leachate Characteristics	110
4.2.1.1	Heavy metals characteristics of leachate	112
4.2.1.2	Physico-chemicals characteristics of leachate	115
4.2.1.3	Characteristics of major ions in leachate	119
	(a) Piper Tri-linear diagram of leachate characteristics	120
4.2.2	Groundwater Characteristics	123
4.2.2.1	Heavy metals composition of groundwater	123
	(a) Heavy metals distribution in Beriah and Matang Landfill Sites	128
4.2.2.2	Physico-chemicals characteristics of groundwater	129
4.2.2.3	Major ions composition of groundwater	134
	(a) Major ion distribution in Matang and Beriah landfills	136
	(b) Piper Tri-linear diagram of groundwater characteristics	138
4.3	Stable Isotope ( $\delta^2\text{H}$ , $\delta^{18}\text{O}$ and $\delta^{13}\text{C}$ )	140
4.3.1	Composition of $\delta^2\text{H}$ - $\text{H}_2\text{O}$ and $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ in leachate	140
4.3.2	Composition of $\delta^2\text{H}$ - $\text{H}_2\text{O}$ and $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ in Groundwater and Surface water	142



4.3.2.1	Matang Landfill	143
4.3.2.2	Beriah Landfill	148
4.3.3	$\delta^{13}\text{C}$ -DIC Composition of Leachate, Groundwater and Surface Water	150
4.3.3.1	Matang landfill	151
4.3.3.2	Beriah landfill	153
4.4	Groundwater Modelling (MODFLOW)	156
4.4.1	Groundwater Flow Model	156
4.4.2	Transport Simulation Using MODPATH	156
4.4.3	Groundwater Flow Velocity	157
4.4.4	Transport Modelling of $\text{Na}^+$	159
4.5	Overview of Isotope Hydrology, Electrical Resistivity Imaging and Hydrochemistry Method in Fingerprinting of Pollutant in Groundwater	165
4.5.1	Sampling, testing, analysis and cost factor	165
CHAPTER 5	CONCLUSION AND RECOMMENDATION	
5.1	Introduction	167
5.2	Conclusion	167
5.3	Recommendations	170
5.3.1	Contamination mitigation and remediation measure in groundwater	170
5.3.2	Improving the existing contamination fingerprinting method.	170
REFERENCES		172
LIST OF PUBLICATIONS		190
APPENDIX A		
APPENDIX B		
APPENDIX C		

## LIST OF TABLES

		Page
Table 2.1:	Classification of sanitary landfills in Malaysia (Ministry of Housing and Local Government, Malaysia, MHLG, 1990)	12
Table 2.2:	Summary of total landfills in Malaysia (NSWMD, 2012)	13
Table 2.3:	Leachate classification with age of landfill	18
Table 2.4:	Typical value for landfill leachate classification (Ngo et al., 2008)	18
Table 2.5:	Landfill leachate characteristics vs. age	20-21
Table 2.6:	National Guidelines for Raw Drinking Water Quality (Ministry of Health, 2000)	24
Table 2.7:	Leachate and groundwater characteristics	28-29
Table 2.8:	Contaminants in leachate and their effects	31-32
Table 2.9:	Permeable zone characterisation (Sinha, 2000)	40
Table 2.10:	Lithology of borehole (Hube et al., 2011)	41
Table 2.11:	Lithology data with groundwater potential (Srivastava and Ramanathan 2008)	42
Table 2.12:	Abundance ratio of stable isotopes in the environment (Clark and Fritz, 1997)	48-49
Table 2.13:	Approximate groundwater recharge age for continental areas based on Tritium values (Clark and Fritz, 1997)	52
Table 2.14:	Stable isotope composition of landfill leachate, gas, surface water and groundwater (expressed in ‰)	54-55
Table 3.1:	Physical boundary of the model (World Co-ordinates)	87
Table 3.2:	Geological layers used in model	90
Table 3.3:	Hydraulic conductivity, storage, specific yield and effective porosity values for all layers	90
Table 3.4:	Observation heads for MT1 well according to time series at coordinate 298844 E and 533846 N	91

Table 4.1:	Resistivity ranges for interpretation together with possibility type of material	95
Table 4.2:	Typical electrical resistivity of earth's materials (Samouelian et al., 2005)	96
Table 4.3 :	Particle Size Distribution for MT4 at 15 m depth	108-109
Table 4.4	Classification of Soil Texture type according to particle size (Whitlow, 2001)	109
Table 4.5:	Classification of soil of MT4 at 15 m depth	110
Table 4.6:	Comparison of heavy metals composition of leachate in various landfills in Malaysia	116
Table 4.7:	Composition of major ions in leachate from November 2010 to March 2012 at Matang and Beriah landfill site (expressed in mg/L)	119-120
Table 4.8:	Heavy metals concentration in groundwater for Matang and Beriah landfills (March 2012)	124
Table 4.9:	Physico-chemical concentration in groundwater for Matang and Beriah landfills (March 2012)	131-132
Table 4.10:	Major ion composition in Matang and Beriah landfill (March 2012)	135
Table 4.11:	Water Type on the Basis of Piper Diagram (Matang landfill)	139
Table 4.12:	Concentration of $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ and $\delta^2\text{H}$ - $\text{H}_2\text{O}$ in landfill leachate	141
Table 4.13:	Results of $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ and $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ of groundwater, surface water and leachate for March 2012	143
Table 4.14:	Percentage mixing of river water estimated by environmental isotope ( $\delta^{18}\text{O}$ )	146
Table 4.15:	Percentage mixing of groundwater with leachate estimated by EC	148
Table 4.16:	Results of $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ and $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ of groundwater, surface water and leachate for June 2011 and March 2012	149
Table 4.17:	$\delta^{13}\text{C}$ -DIC isotope composition of leachate, groundwater and surface water from Matang landfill (expressed in ‰)	151
Table 4.18:	$\delta^{13}\text{C}$ -DIC isotope composition of leachate, groundwater and surface water from Beriah landfill (expressed in ‰)	153

## LIST OF FIGURES

		Page
Figure 2.1:	Phases in generation of landfill gas (Augenstein, 1990)	14
Figure 2.2:	Phases in generation of landfill leachate (Augenstein, 1990)	14
Figure 2.3:	Leachate formation (Farquhar, 1989)	17
Figure 2.4:	Source of groundwater contamination (European Groundwater and Contaminated Land Information System, EUGRIS, 2011)	26
Figure 2.5:	Leachate impact on groundwater and surface water (Agency for Toxic Substances and Disease Registry, ASTDR, 2011)	27
Figure 2.6:	Electrode configuration for Wenner Array	34
Figure 2.7:	Electrode configuration for Schlumberger Array	35
Figure 2.8:	Electrode configuration for Pole-Pole Array	36
Figure 2.9:	Electrode configuration for Pole-Dipole Array	36
Figure 2.10:	Processes and principles of environmental isotopes (Mazor, 1997)	47
Figure 3.1:	Flow chart of methodology	64
Figure 3.2:	Hydrogeological map of the study area (Geological Survey Department of Malaysia, 1993)	66
Figure 3.3:	Regional geology of Matang Sanitary Landfill (Geological Survey Department of Malaysia, 1985)	67
Figure 3.4:	Site maps showing the Matang landfill area and sampling locations	67
Figure 3.5:	Hydrogeological map of Beriah Landfill	69
Figure 3.6:	Illustration plan view of Beriah Landfill and sampling locations (Google Earth, 2009)(b)	70
Figure 3.7:	Arrangement of electrodes for a 2-D electrical survey and the sequence of measurements used to build up a section using Wenner array (Loke, 1996)	72

Figure 3.8:	Site map of Matang landfill at sampling location (Google Earth, 2009)(a)	76
Figure 3.9:	Site map of Beriah landfill at sampling location (Google Earth, 2009)(b)	77
Figure 3.10:	Ion Analysis Process. A typical IC analysis consists of six stages (Dionex, 2009)	79
Figure 3.11:	Reagent solution for ICS instrument (anion and cation) and the surrounding	79
Figure 3.12:	Preparation of sample dilution and the setup of the suppressor and column	80
Figure 3.13:	Preparing samples and ready to be test into the instrument	80
Figure 3.14:	Setting up the pump	83
Figure 3.15:	Varian SPS3 orientation	83
Figure 3.16:	Cooler and ICP instrument	83
Figure 3.17:	Grid model dimension of Matang landfill from MODFLOW	88
Figure 3.18:	Ground surface elevation of Matang landfill	89
Figure 3.19:	3-D view of ground surface and all seven layers	89
Figure 4.1:	Illustration plan view of Beriah landfill, Perak, Malaysia and setting of electrical resistivity imaging survey lines and boreholes location (Google Earth, 2009)(b)	94
Figure 4.2:	Resistivity Section for line 1	95
Figure 4.3:	Resistivity Section for line 2	96
Figure 4.4:	Resistivity Section for line 3	97
Figure 4.5:	Resistivity Section for line 4	97
Figure 4.6:	Resistivity Section for line 5	98
Figure 4.7:	Lithology cross-section of borehole AP1, AP2 and AP8	99
Figure 4.8:	Lithology cross-sections of boreholes AP4, AP5 and AP6	99
Figure 4.9:	Lithology cross-sections of boreholes AP4 and AP3	100
Figure 4.10:	Lithology cross-sections of boreholes AP6, AP7 and AP8	101

Figure 4.11:	Illustration plan view of Matang landfill, Perak, Malaysia and setting of electrical resistivity imaging survey lines and boreholes location (Google Earth, 2009)(a)	102
Figure 4.12:	Resistivity Section for line 1	103
Figure 4.13:	Resistivity Section for line 2	103
Figure 4.14:	Resistivity Section for line 3	104
Figure 4.15:	Resistivity Section for line 4	105
Figure 4.16:	Lithology cross-sections of boreholes MT7, MT1, MT6, MT2, MT3 MT4 and MT5	106
Figure 4.17:	Lithology cross-sections of boreholes MT9, MT4 and MT5	107
Figure 4.18:	Lithology cross-sections of boreholes MT7 and MT8	108
Figure 4.19:	Particle Size Distribution Curve for MT4 at depth of 15m	111
Figure 4.20:	Ferum, Copper, Nickel, Chromium and Zinc concentration in Matang and Beriah landfills leachate	113
Figure 4.21:	pH, EC and TDS concentration in the Matang and Beriah landfills leachate	117
Figure 4.22:	Piper diagrams of leachate at (a) Matang and (b) Beriah landfill	121
Figure 4.23:	Heavy metals concentration in (a) Matang and (b) Beriah on March 2012	125
Figure 4.24:	Rainfall distribution at both Matang and Beriah landfills	127
Figure 4.25:	Distribution pattern of Fe at (a) Matang and (b) Beriah landfill in March 2012	130
Figure 4.26:	EC concentration in (a) Matang and (b) Beriah landfill	133
Figure 4.27:	Distribution pattern of Total Na <sup>+</sup> and K <sup>+</sup> at (a) Matang and (b) Beriah landfill for March 2012 in mg/L	137
Figure 4.28:	Piper diagrams of surface water and groundwater in (a) Matang landfill and (b) Beriah landfill for March 2012	139
Figure 4.29:	Plot of Meteoric Water Line showing the effects of certain physicochemical processes on the isotopic	142

	composition of water (Rodriguez-Rodriguez et al., 2006 ; Satrio et al., 2012)	
Figure 4.30:	Plot of $\delta^2\text{H}$ -water versus $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ (‰) for surface water, groundwater and leachate from Matang landfill site (March 2012)	145
Figure 4.31:	Plot of $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ versus $\delta^{18}\text{O}$ - $\text{H}_2\text{O}$ (‰) for groundwater and leachate from Beriah landfill site (March 2012)	150
Figure 4.32:	$\delta^{13}\text{C}$ versus alkalinity for Matang landfill (March 2012)	152
Figure 4.33:	$\delta^{13}\text{C}$ versus alkalinity for Beriah landfill (March 2012)	155
Figure 4.34:	Groundwater heads and flow directions for (a) Matang and (b) Beriah landfills both in layer 1	158
Figure 4.35:	Particle pathline flow direction in (a) Matang and (b) Beriah landfills	161
Figure 4.36:	Matang landfill $\text{Na}^+$ dispersion pattern in all layers for 7300 days	162
Figure 4.37:	Beriah landfill $\text{Na}^+$ dispersion pattern in all layers for 7300 days	163
Figure 4.38:	Three dimensional $\text{Na}^+$ distribution pattern at (a) Matang and (b) Beriah landfill for 7300 days	164

## LIST OF ABBREVIATIONS

2D	2 dimension
3D	3 dimension
APHA	American Public Health Association
As	Arsenic
ASTDR	Agency for Toxic Substances and Disease Registry
BOD	Biological Oxygen Demand
Cd	Cadmium
COD	Chemical Oxygen Demand
Cr	Chromium
Cu	Copper
DIC	Dissolved Inorganic Carbon
DWAF	Department of Water Affairs and Forestry
EC	Electric Conductivity
Fe	Ferum
GRA	Groundwater Resources Association,
Hg	Mercury
IRMS	Isotope Ratio Mass Spectrometer
MHLG	Ministry of Housing and Local Government
Mn	Manganese
MODFLOW	Modular Three-Dimensional Finite Difference Groundwater Flow
MSW	Municipal Solid Waste
NH <sub>3</sub> -N	Ammoniacal nitrogen



Ni	nickel
NSWMD	National Solid Waste Management Department
Pb	Lead
RIP	Resistivity Image Profiling
TDS	Total dissolved solids
TU	Tritium Value
UNSW	University of New South Wales,
US EPA,	United States Of America, Environmental Protection Agency
VFA	Volatile fat acids
VOC	Volatile organic compound
VSMOW	Vienna Standard Mean Ocean Water
Zn	Zinc

## LIST OF SYMBOLS

$\delta^{11}\text{B}$	Boron-11
$\delta^{81}\text{Br}$	Bromide-81
$\delta^{13}\text{C}$	Carbon-13
$\delta^{12}\text{C}$	Carbon-12
$\delta^{13}\text{C}$	Carbon-13
$\delta^{37}\text{Cl}$	Chloride-37
$\delta\text{D}$	Deuterium
$\delta^2\text{H}$	Hydrogen-2
$\delta^{15}\text{N}$	Nitrogen-15
$\delta^{18}\text{O}$	Oxygen-18
$\delta^{16}\text{O}$	Oxygen-16
$\delta^6\text{Li}$	Lithium-6
$\delta^{34}\text{S}$	Sulphate-34
$\text{Ca}^{2+}$	Calcium ion
$\text{Cl}^-$	Chloride ion
$\text{K}^+$	Potassium ion
$\text{Mg}^{2+}$	Magnesium ion
$\text{Na}^+$	Sodium ion
$\text{NO}_3^-$	Nitrate ion
$\text{PO}_4^{3-}$	Phosphate ion
$\text{SO}_4^{2-}$	Sulphate ion

# **KAJIAN PENCEMARAN AIR BAWAH TANAH DI TAPAK PELUPUSAN SISA PEPEJAL MENGGUNAKAN TEKNIK GEOFIZIK, HIDROKIMIA DAN ISOTOP HIDROLOGI**

## **ABSTRAK**

Kaedah gabungan geofizikal, hidrokimia dan isotop hidrologi telah digunakan dalam penyelidikan ini untuk mengkaji ciri-ciri, punca dan perpindahan pencemaran di tapak pelupusan sampah Matang dan Beriah. Penyelidikan ini adalah untuk membandingkan pencemaran air bawah tanah untuk dua tapak pelupusan sampah iaitu Matang (tahap 3) yang merupakan tapak pelupusan sampah terkawal dan Beriah (tahap 0) yang merupakan tapak pelupusan sampah tidak terkawal. Kaedah profil pengimejan keberintangan berserta data ciri-ciri tanah yang diperolehi daripada telaga menunjukkan gambaran subpermukaan dan membuktikan dengan jelas kawasan-kawasan bawah tanah yang tercemar. Nilai keberintangan yang rendah telah dikesan di garisan 1 untuk Beriah dimana ia terletak di selatan barat tapak pelupusan sampah. Nilai keberintangan berada dalam julat 20 hingga 50  $\Omega$ m (sederhana rendah) untuk kedalaman 10 m dan kurang daripada 10  $\Omega$ m (sangat rendah) untuk kedalaman lebih daripada 10 m. Untuk Matang pula, nilai keberintangan yang sangat rendah ditunjukkan pada garisan 3 dengan nilai kurang daripada 10  $\Omega$ m pada jarak 100 hingga 180 m daripada garisan dan pada kedalaman 0 hingga 5 m. Keputusan geofizik ini kemudiannya dibandingkan dengan analisis hidrokimia untuk air bawah tanah dan air permukaan. Ciri-ciri hidrokimia seperti ciri fizikal (EC, TDS, pH dan DO), ion-ion utama ( $\text{Ca}^{2+}$ ,  $\text{Mg}^{2+}$ ,  $\text{Na}^+$ ,  $\text{K}^+$ ,  $\text{NH}_4^+$ ,  $\text{Cl}^-$ ,  $\text{HCO}_3^-$  dan  $\text{SO}_4^{2-}$ ) dan logam berat (Fe, Ni, Cu dan Cr) telah digunakan untuk pengesanan pergerakan dan perpindahan larut lesap. Keputusan menunjukkan kepekatan  $\text{Cl}^-$ ,  $\text{Na}^+$ ,  $\text{K}^+$  and  $\text{HCO}_3^-$  adalah tinggi di sesetengah telaga di mana ia sejajar dengan ciri-ciri larut lesap. Oleh

itu, perpindahan larut lesap boleh diramalkan. Kemudian, analisis isotop stabil dilakukan di mana pengkayaan  $\delta^{18}\text{O}$ ,  $\delta^2\text{H}$  dan  $\delta^{13}\text{C}$  di sesetengah telaga adalah seiring dengan ciri-ciri air sampah dan juga analisis hidrokimia. Daripada keputusan yang diperolehi, sampel air sampah untuk kedua-dua pelupusan sampah adalah sederhana banyak dengan  $\delta^{18}\text{O}$ -  $\text{H}_2\text{O}$  di mana untuk tapak pelupusan Matang, nilainya adalah daripada  $-5.98 \text{ ‰}$  hingga  $-4.51 \text{ ‰}$  dan tapak pelupusan Beriah adalah daripada  $5.85 \text{ ‰}$  and  $-4.52 \text{ ‰}$ . Tambahan pula, Visual MODFLOW telah digunakan untuk menentukan pergerakan air bawah tanah, kelajuan, pergerakan zarah dan pengangkutan bahan cemar. Keputusan yang diperolehi daripada gabungan semua teknik dan simulasi pemodelan air bawah tanah dapat menunjukkan dan menyelesaikan masalah yang timbul daripada teknik yang konvensional.

# SHALLOW GROUNDWATER CONTAMINATION EVALUATION AT LANDFILL SITE USING GEOPHYSICS, HYDROCHEMISTRY AND ISOTOPE HYDROLOGY TECHNIQUES

## ABSTRACT

Integrated geophysical, hydrochemistry and isotope hydrology have been used in this research to study the characteristics, origin and migration of contamination at Matang and Beriah landfill. Comparison studies of groundwater contamination for both landfill site categories were conducted for Matang landfill, level 3 (controlled landfill) and Beriah landfill, level 0 (uncontrolled landfill). The Electrical Resistivity Imaging method, supported by soil well logging data shows a subsurface image that provides clear indication of ground contamination zone. Low resistivity values were detected at line 1 in Beriah which is at the south west of the landfill. The resistivity value ranges indicate that the value ranges are from 20 to 50  $\Omega\text{m}$  (moderately low) at a depth of 10 m and less than 10  $\Omega\text{m}$  (very low) at a depth of greater than 10 m. Meanwhile, for Matang landfill, a significantly low resistivity value was observed in line 3 with a value  $<10 \Omega\text{m}$  at 100 to 180m distance of the line and at the depth of 0 to 5m. The geophysical results were then compared with hydrochemical analysis of groundwater and surface water. The hydrochemical characteristics such as physical (EC, TDS, pH, and DO), major ions ( $\text{Ca}^{2+}$ ,  $\text{Mg}^{2+}$ ,  $\text{Na}^+$ ,  $\text{K}^+$ ,  $\text{NH}_4^+$ ,  $\text{Cl}^-$ ,  $\text{HCO}_3^-$  and  $\text{SO}_4^{2-}$ ) and heavy metal (Fe, Ni, Cu and Cr) were used to fingerprint the leachate flow and migration. The results show that the high concentration of  $\text{Cl}^-$ ,  $\text{Na}^+$ ,  $\text{K}^+$  and  $\text{HCO}_3^-$  in certain boreholes indicate a strong correlation with leachate characteristics. Therefore, the migration of leachate plume can be predicted. The stable isotopes ( $\delta^{18}\text{O}$ ,  $\delta^2\text{H}$ ,  $\delta^{13}\text{C}$ ) results show that when an enrichment of  $\delta^{18}\text{O}$ ,  $\delta^2\text{H}$ ,  $\delta^{13}\text{C}$  in certain boreholes occur, it can be proved to be in good correlation with leachate

characteristics. The leachate samples of both landfills are moderately enriched in  $\delta^{18}\text{O}-\text{H}_2\text{O}$  where in Matang landfill, the value ranging from  $-5.98\text{‰}$  to  $-4.51\text{‰}$  and for Beriah landfill, from  $-5.85\text{‰}$  and  $-4.52\text{‰}$ . In addition, Visual MODFLOW was used to determine groundwater flow direction, velocity, particle flow and contaminant transport. The results of all the integrated techniques and groundwater modeling simulations prove to provide a good fingerprinting tool that can overcome the limitations posed by conventional techniques.

## **CHAPTER ONE**

### **INTRODUCTION**

#### **1.1 Background**

Malaysia is a developing country with a growing economy but still struggling to overcome the Municipal Solid Waste (MSW) problem. Overall, there is about 17,000 tonnes of waste being generated daily and this amount is estimated to increase up to 30,000 tonnes/day by the year of 2020 as a result of the increase in population, rapid economy growth, industrialisation and urbanisation process (Ministry of Housing and Local Government, 2005). All these wastes came from various sources such as, residential areas, industrial areas, commercial areas and institutional areas. Each of these sources contributes to different types of waste. Manaf et al. (2009) reveals that about 45% of the future waste will be made up of food waste, 24% of plastic, 7% of paper and 6% of iron and glass with the remainder being made up of other materials.

In Malaysia, landfilling is the most used method for solid waste disposal which employed an open dumpsite system. This method is favoured because it is considered to be the most reliable and cost effective (Chiemchaisri et al., 2002; Vasanthi et al., 2008). Statistics shows that to date, there are 190 disposal sites still in operation. However, only ten can be classified as sanitary landfills (Ministry of Housing and Local Government, 2005). The difference between open dumpsites and landfills lie in the design. A landfill is an engineered waste disposal site facility that is well equipped with specific pollution control technologies to reduce and minimise the potential impacts (Sabahi et al., 2009). An open dumpsite on the other hand, does not have all of the design aspects and poses potential threats to health, safety and environment (Idris et al., 2004).

The major potential environmental impact associated with landfilling activities is leachate generation. Leachate is a polluted liquid that emanates from the base of the landfill (Papadopoulou et al., 2006). It may be produced from precipitation, surface run-off and infiltration or intrusion of groundwater percolating through a landfill (Wang et al., 2002). Generally, the leachate produced contains organic (BOD, COD), ammoniacal-nitrogen, total suspended solids and inorganic pollutant (toxic metals) (Halim et al., 2009; Bashir et al., 2009). However, the quality of leachate will differ from one landfill site to another because it is dependent on the nature of wastes buried and the condition of disposal sites.

Thus, improper landfill management (without landfill liner and soil cover) can lead to excessive generation of leachate and the possibility for leachate migrating into groundwater is a major concern. In addition, insufficient equipment and facilities in landfill sites (leachate collection system and leachate treatment) will result in leachate being discharged into the nearest bodies of water without proper treatment. As a consequence, it will cause groundwater and surface water contamination which might pose serious threat to the environment, human health and other living organisms (Kjeldsen et al., 2010).

In order to assess whether groundwater is contaminated due to the leachate migration, geophysical hydrochemistry and isotope analysis can be conducted. There are two types of geophysical methods that are based on the physical properties of materials below the earth's surface. Surface geophysical methods are commonly used in mapping features of the geological settings meanwhile; borehole geophysical provides useful stratigraphic and hydrogeologic data (Shewartz and Zhang, 2003). 2-D Electrical Resistivity Imaging (ERI) was developed to elucidate complex subsurface structure and uncover hidden water in a geophysical survey due to their



different electrical properties. Since it is a non-destructive method and it is sensitive to the water content of each layer, it offers an attractive tool for describing subsurface properties without digging (Turesson, 2006). ERI can be measured using 1-dimensional (1D), 2-dimensional (2D) and 3-dimensional (3D) techniques. The measurements from the 1D technique displays the variation of soil resistivity in-depth without taking into account the horizontal variation (Loke, 2000). In the last decades, 2D and 3D techniques have been fairly developed so that the resistivity imaging has progressed to become a more applicable exploration technique. The advantages of using 2D/3D techniques are:

- i. The ability to construct highly accurate resistivity imaging of the subsurface using a large number of measured points
- ii. Provides beneficial results that are complementary to the information acquired through the use of other geophysical methods (Abbas et al., 2009).

The differences between 2D and 3D techniques are that the results from using 2D techniques will give a simultaneous display of both horizontal and vertical variations in resistivity (Edwards, 1977), while 3D techniques are able to show the direction of water flow. There are two methods to obtain a 3D ERI:

- i. The reconstruction of a 2D network of parallel pseudo section
- ii. Using a square array of four electrodes (Samouelian et al.,2005).

Besides, the hydrochemistry method is a subdivision of hydrology studies where its function is to detect the chemical properties of water by detecting the mineral ions that are present in the water sample and comparing it with existing water standards to determine the potential of the water. It is a very common method nowadays mostly for environmental studies such as determining the pollution of water, infiltration of leachate water into groundwater resources or salinity of water. The types of ions

present are grouped into two (2) types, i.e. major ions and minor ions. The focus is to detect mineral ions that are present in the water sample and compare it against existing water standards to determine the potential of the water.

Environmental isotopic ratio of  $\delta^2\text{H}$ ,  $\delta^{13}\text{C}$  and  $\delta^{18}\text{O}$  can be used distinctly to identify municipal solid waste landfill leachate as a source of surface waters and groundwater contamination in the study area. In this project, surface water samples from upstream and downstream of landfill related rivers, ponds and groundwater samples within the landfill site together with leachate samples were analysed to study the applicability of the stable isotope ratios as a tool for monitoring leachate contamination in surface waters and groundwater. All the water samples measured for  $\delta^2\text{H}$ -water,  $\delta^{18}\text{O}$ -water and  $\delta^{13}\text{C}$ -DIC (Dissolved Inorganic Carbon) values as derived from previous studies have demonstrated that the biogeochemical processes within the landfill environment has ability to produce a unique isotopic composition for these isotopes (Hackley et al., 1996; North et al., 2006). Value of the stable isotopes obtained from surface waters and groundwater samples were studied and correlated with the leachate to clearly fingerprint the possibility of contamination. The application of nuclear related technology in this study was conducted with the aid of Isotope Ratio Mass Spectrometer (IRMS) to analyse water samples for isotopic ratio. One of the significant objectives in this project is to develop an effective way to fingerprint surface waters and groundwater contamination caused by landfill leachates.

## **1.2 Problem Statement**

Today, solid waste is among the major environmental problems faced by most municipal councils in Malaysia. As the amount of waste generation increases rapidly, landfills, in turn, are filling up at staggering rates resulting in a high demand for new landfill sites. However, due to the scarcity of land and expensive land prices especially in urban areas and elevated costs of constructing and operating a landfill, most of the landfills in Malaysia are developed and operated on an ad-hoc basis and located close to surface water and water catchment's areas.

Even though the potential for surface and groundwater contamination from landfills is due to the landfill leachate and has been recognised several decades ago especially in developing countries, there are few efforts being done to mitigate this problem in present landfill sites particularly in Malaysia. Studies have shown that majority of the 230 official dumping sites in Malaysia have no leachate treatment, no gas management facilities, no daily covering materials and are without proper liners or barriers (Chenayah and Takeda, 2005). The approach of managing solid waste eventually contributes severe impacts to groundwater and surface water contamination problems (Tadza et al., 2001). This is because leachate will always find a way to enter groundwater (leachate leakage owing to improper lining in landfills) and surface water (leachate run-off due to poor or no drainage facility and improper leachate treatment thanks to the lack of leachate treatment facilities).

There are many sources that can contribute to groundwater pollution namely the application of fertilisers, pesticides, disposal of treated industrial and municipal waste water, accidental spills and the impact of septic tank effluent (Paras et al., 2007; Mustafa et al., 2005). However, landfill leachate is believed to be the most potential threat to groundwater because it contains various types of substances and

contaminants that are resistant to chemical and biological degradation (Fatta et al., 1999). A study reveals that groundwater contaminated with leachate might contain high conductivity, total dissolved solids, ammonia, chloride and toxic metals that might pose threat to human health (cancer risk, birth defect, damage to nervous system and death) and any other living organisms (Sabahi et al., 2009; Singh et al., 2008; Adeyemi et al., 2007).

Aware of these problems, Ministry of Housing and Local Government has conducted a study on safe closure and rehabilitation of landfill sites in Malaysia and suggested that 16 landfills located near water intake points (posing a threat to the safety and health of the people) to be closed using safe and acceptable methods. However, because of the fact that there are no replacement or alternative sites for solid waste disposal, four of the landfills were allowed to continue operations under the condition that these landfills be upgraded to an acceptable level (Level 3 for environmentally non-sensitive area and Level 4 for environmentally sensitive area or located near the intake of the water treatment plant for domestic supply) that will not damage the environment (Ministry of Housing and Local Government, 2005).

Consequently, detection of groundwater pollution and determination of pollutant sources are important when considering a clean-up or containment programme as well as legal issues that are frequently associated with polluted groundwater. In landfill areas with the presence of multiple sources of anthropogenic pollutants such as, hazardous waste disposal facilities, chemical industries, sewage treatment facilities, agriculture, housing and also geogenic factors such as, seawater intrusions that could possibly contribute to groundwater pollution cause difficulties in differentiating the source of the pollution and thus, complicates the interpretation of chemical data from monitoring wells around the landfill. By using the advantages of

all the methods (resistivity imaging, hydrochemical and stable isotopes), it should be sufficient to overcome the limitation of inability to differentiate sources of pollution posed by conventional techniques.

### **1.3 Objectives**

The purpose of this study is to develop an integrated environmental forensics tool in groundwater and surface water using hydrochemical, geophysical and isotope techniques. The information and results obtained from all the tools will map the contamination flow, direction, flow rate in the groundwater. Moreover, the information obtained could possibly be used for cost estimate, maintenance and monitoring activities of a landfill disposal site in time to come. The specific objectives of this study are to:

1. Determine the sub-surface pollutant plume by using geophysical techniques.
2. Evaluate the characteristics (physical, major ions, heavy metals, and D, O-18, C-13) of the landfill sites by using the hydrochemical method and stable isotopic composition as a tool.
3. Identify groundwater, surface water and leachate interaction at landfill sites through the use of geophysical techniques, hydrochemical and stable isotopic composition.
4. Verify the plume movement by using the groundwater model for landfill disposal sites.

#### **1.4 Scope of Work**

This research mainly focuses on two different levels of dumpsites in Perak, the Matang and Beriah landfills. Using the advantages of each method to compliment the other methods will give more accurate collaboration of results to fingerprint the contamination in shallow groundwater and surface water. To study the interaction of leachate, groundwater, and surface water at both landfill sites, leachate samples were collected from a leachate pond while groundwater and surface water were collected from the constructed borehole and nearest stream, respectively to monitor the leachate contamination of groundwater and surface water. All these samples were tested and examined for the physical, major ions, heavy metals and environmental isotopes (deuterium, oxygen-18 and carbon-13) to evaluate their characteristics. Meanwhile, geophysical techniques by using resistivity imaging were carried out to obtain the sub-surface profile of the landfill sites. MODFLOW software was used to study the movement and direction of groundwater flow as well as contaminant transport.

#### **1.5 Thesis Outline**

This thesis comprises of five chapters as follows:

Chapter 1 Introduction: This chapter introduces the background of the study and presents the problem statements, objectives and scope of work.

Chapter 2 Literature Review: Chapter 2 discusses the landfill, leachate and groundwater system. This chapter also emphasises on hydrochemical, stable isotopes, electrical resistivity imaging and groundwater modelling.

Chapter 3 Methodology: This chapter presents the electrical resistivity imaging method used, laboratory experiments for hydrochemical and stable isotope analysis including methods of groundwater modelling using visual MODFLOW.

Chapter 4 Results and Discussion: This chapter contains analytical data obtained from experimental and field works. The results include resistivity pseudo-section imaging of sub-surface, hydrochemical characteristics and isotopic composition analysis of leachate, groundwater and surface water for both Matang and Beriah landfill sites. This chapter also includes groundwater modelling.

Chapter 5 Conclusion and Recommendations: This chapter summarises all results and discussion for the integrated method (resistivity imaging, hydrochemical and isotope) and ultimately, draws a conclusion based on it.

## **CHAPTER TWO**

### **LITERATURE REVIEW**

#### **2.1 Introduction**

This chapter provides background information of landfill, landfill leachate characteristics, the impact of landfill leachate and groundwater contamination, geophysical techniques, environmental isotopes ratio, the hydrochemical method and MODFLOW software. It also includes the findings from previous works that related to this study.

##### **2.1.1 Waste generation and types of waste**

Malaysia is a developing country with rapid economy growing but still struggling finding the ideal solution to dispose Municipal Solid Waste (MSW) in a sustainable approach. The average municipal solid waste generated in Malaysia ranges between 0.5 to 0.8 kg/capita/day and increases to 1.7 kg/capita/day in major cities (Kathirvale et al., 2004). The current Malaysian population is 28 million and will keep rising over the years. Therefore, more waste is expected to be generated and substantial land will be needed in the future even if, the waste generation remains at the same level. The disadvantage of having too many landfills is that more leachate will be produced.

There are various types of waste stemming from residences, industries, clinical and municipals that will continue to be disposed of on the land (James, 1977). Hence, different types of waste require different types of landfill management. This is because some amount of generated waste is hazardous and poses potential threats to the environment and needs to be treated properly as well as safely disposed (Latifah



et al., 2009). As a result, a classification system has been developed whereby landfills can be differentiated. According to the Department of Water Affairs and Forestry, DWAF, South Africa (1998), landfills can be classified into two types: sanitary landfill that receives general waste and secure landfill that receives hazardous waste. Besides, the nature of solid waste buried in the landfill will influence the leachate characteristics and its composition. Manaf et al., (2009) revealed that about 45% of waste in future will be made up of food, 24% of plastic, 7% of paper and 6% of iron and glass with the balance being (made up) of other materials.

### **2.1.2 Waste disposal site**

All municipal solid waste produced are disposed in landfills and open dumpsites. The difference between open dumpsites and landfills are in terms of design. A landfill is an engineered waste disposal site facility that is well equipped with specific pollution control technologies to reduce and minimise the potential impacts (Sabahi et al., 2009). An open dumpsite, however, does not has appropriate landfill management aspects and poses potential threats to health, safety and the environment (Idris et al., 2004). Open dumpsites remain the most favoured method to dispose solid waste followed by lower levels of landfills due to technological and financial constraints (Chong et al., 2005). In Malaysia, landfills can be categorised into five levels that are, Level 0 (open dumpsite), Level 1 (controlled tipping), Level 2 (sanitary landfill with bund and daily soil cover), Level 3 (sanitary landfill with leachate recirculation system) and Level 4 (sanitary landfill with leachate treatment system) (Manaf et al., 2009; Pauzi et al., 2011). Table 2.1 clearly defines and differentiates the levels of landfills (Ministry of Housing and Local Government, Malaysia, MHLG, 1990).

Table 2.1 Classification of sanitary landfills in Malaysia (Ministry of Housing and Local Government, Malaysia, MHLG, 1990)

Items	Level 1	Level 2	Level 3	Level 4
Enclosing bund		√	√	√
Divider		*	√	√
Surrounding drain		√	√	√
Approach road	√	√	√	√
On-site road	√	√	√	√
Buffer zone		√	√	√
Litter control facility		*	√	√
Gas removal facility		*	√	√
Leachate collection facility			√	√
Leachate cycling facility			√	√
Seepage control facility			√	√
Leachate treatment facility				√
Site office	*	*	√	√
Weighbridge	√	√	√	√
Safety facility		√	√	√
Fire prevention facility		*	√	√
Monitoring facility			√	√
Wheel wash facility				√
Landfill equipment	√	√	√	√
Personnel (management)	√	√	√	√
Cover material	*	√	√	√
Water supply		√	√	√
Electricity			√	√
Insecticide	√	√	√	√
Monitoring chemicals			√	√
Environmental protection facility		√	√	√
Maintenance equipment	√	√	√	√

√: sufficient item

\*: insufficient item

In 2002, Ministry of Housing and Local Government (MHLG) reported that there were 171 landfill operations in Malaysia where 83 are Level 0 (open dumpsite), 51 are Level 1 (controlled tipping) and 38 are Level 2, 3 and 4. Idris et al., (2004) revealed that in 2002, the number of landfills in operation is 161 where 77 are open dumps, 49 are Level 1 (controlled tipping), and only 37 are Level 2, 3 and 4. Following that, up till April 2012, there were a recorded total of 165 landfills that are

still operation while 131 are closed landfills (as shown in Table 2.2) (Jabatan Pengurusan Sisa Pepejal Negara, JPSPN, 2012).

Table 2.2 Summary of total landfills in Malaysia (JPSPN, 2012)

State	Number of Operation Landfill	Number of Closed Landfill	Total
Johor	14	23	37
Kedah	8	7	15
Kelantan	13	6	19
Melaka	2	5	7
Negeri Sembilan	7	11	18
Pahang	16	16	32
Perak	17	12	29
Perlis	1	1	2
Pulau Pinang	1	2	3
Sabah	19	2	21
Sarawak	49	14	63
Selangor	8	14	22
Terengganu	8	12	20
WP Kuala Lumpur	0	7	7
WP Labuan	1	0	1
Total	165	131	296

### 2.1.3 Landfill phases

The decomposition of the readily organic matter begins as soon as the new landfill cell receives its municipal solid waste (MSW). The decomposition of the waste consists of a few phases and it varies from one site to another. This is because it is dependent on various factors such as, the composition of the solid waste, landfill operations, weather, seasonal changes, hydrological conditions of the landfill site, temperature, moisture content, pH and the age of the landfill site. According to previous works, Augenstein (1990) suggested that the stabilisation of waste proceeds in five sequential and distinct phases (aerobic, anaerobic, acidogenic, methanogenic and maturation) while Selberg et al., (2005); Agency for Toxic Substances and Disease Registry, ASTDR (2011) stated that bacteria decomposes landfill waste in

four phases (aerobic, anaerobic, acidogenic and methanogenic). In spite of the varying opinion, they agreed that the decomposition of landfill waste undergoes three main stages that are: the aerobic phase followed by the anaerobic phase and lastly, methane formation. Figures 2.1 and 2.2 show the phases involved in landfills according to gas and leachate generation.

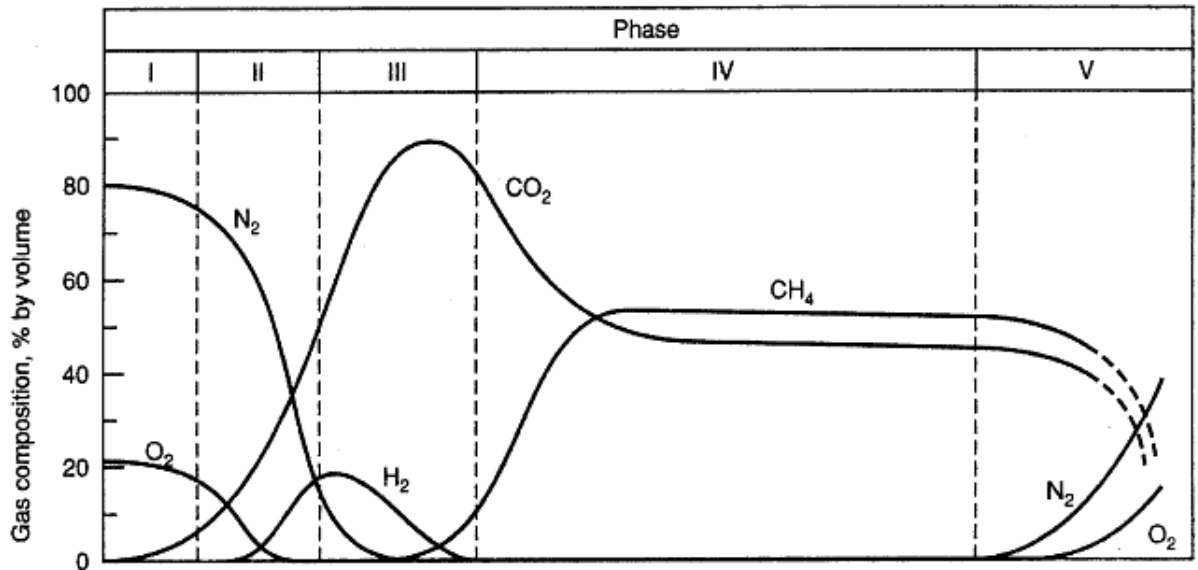


Figure 2.1 Phases in generation of landfill gas (Augenstein, 1990)

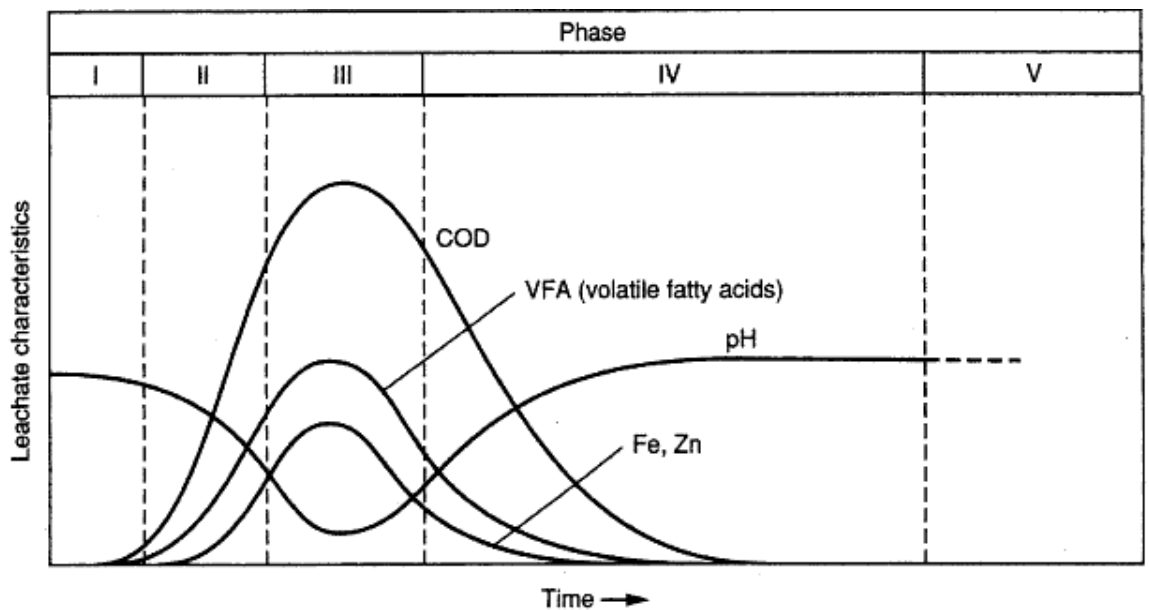


Figure 2.2 Phases in generation of landfill leachate (Augenstein, 1990)

The characteristics and rates of leachate generation from the landfill site are different from each phase and closely related to the microbiological response that occurs at each phase of the landfill site.

Aerobic phase is the first stage of waste decomposition. In this stage, the oxygen present in the void spaces decomposes the solid waste via biological process. Normally, the aerobic phase is quite short and no substantial leachate generation takes place (Jordening and Winter, 2005).

The second phase is known as transition stage where the transition from aerobic phase to anaerobic phase occurs. Within this time period, leachate formation occurs simultaneously. As the anaerobic bacteria take over, they produce wide range of acids including acetic, lactic, formic and alcohol that results in a decrease of pH in leachate. At the end of this stage, the concentration of COD and volatile organic acid will reduce (Chirtensen et al., 2001).

Next, is the acidogenic phase; where a high concentration of volatile organic acid, ammonia, hydrogen, and carbon dioxide is produced. The pH continues to reduce which increases the solubility of many compounds such as heavy metals, BOD and COD (Tchobanoglous, 2002).

In the fourth phase known as the methanogenic phase, methane formation will take place. Methane formation results in increased pH, thus influences the concentration of heavy metals present in the leachate. The concentration of BOD and COD are also reduced during this phase (Kjeldsen et al., 2010). The final phase is maturation. In this phase, the pH continues to increase as carboxylic acid concentration reduces (Warith, 2003).

## **2.2 Leachate**

Undoubtedly, landfills are an indispensable part of our living. However, the leachate production from the landfill site may present long-term threats to groundwater and surface water that are hydrologically linked. This sub-topic will discuss in detail about the leachate formation, characteristics, and factors affecting leachate quality and quantity, as well as the impact of leachate towards groundwater.

### **2.2.1 Leachate Formation**

Leachate is a solution of material leached from a solid. In a landfill site, leachate is polluted liquid that emanates from the base of a landfill (Papadopoulou et al., 2006). Landfill leachate is normally known as high-strength wastewater that is difficult to deal with because it generally contains high strength pollutants that have an adverse effect on the environment (Tengrui et al., 2007). Leachate is produced when percolating water moves through the landfill where it reacts chemically and biologically with the solid waste then, extracts the contaminants into the liquid phase and produces a moisture content sufficiently high to initiate liquid flow before it moves out of the landfill (Fatta et al., 1999).

The major sources of water for leachate formation are the infiltration of rain fall, groundwater that may flow laterally from the geologic formation surrounding the landfill, water contained within the solid waste deposited in the landfill and surface run-off into the landfill from exterior areas (Baker, 2005). Figure 2.3 explains in detail the formation of leachate from various sources. When the rain falls on the surface, it will eventually end up in one of three places:

- i. Running off the surface into the drainage systems (RO)

- ii. Infiltrating the surface and being evapotranspired back into the atmosphere (ET)
- iii. Infiltrating into the landfill and seeping as deep percolation down into the solid waste below
- iv. Percolation may be augmented by the infiltration of groundwater (G).

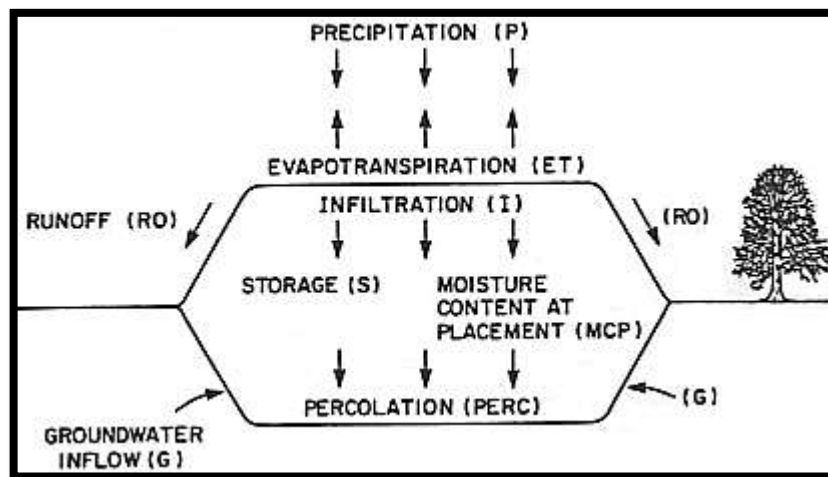


Figure 2.3 Leachate formation (Farquhar, 1989)

Once the leachate reaches the bottom of the landfill or an impermeable layer within the landfill, it either travels laterally to a point where it discharges to the ground's surface as a seep or it will move through the base of the landfill and into the sub-surface.

### 2.2.2 Leachate composition and characteristics

Generally, leachate can be classified into young leachate, intermediate and old or mature leachate. Ragle et al. (1995) reported that the composition of leachate and its emission rates differ between the old and the new areas of the fill. Young leachate indicates the landfill is in the acetic phase while old leachate indicates methanogenic

phase (Maximova and Koumanova, 2006). Young or old leachate can be identified through colour and smell. Young leachate is known to have a slight smell and is brown or golden coloured. As for old or mature leachate, it is often black in colour and has a strong smell alike to the odour of a rotten egg. This colour and odour comes from the availability of oxygen in the landfill. Insufficient or depleted amounts of oxygen will alter the process from aerobic to anaerobic. Within the anaerobic process, the bacterium produces gas known as methane. In addition, leachate can also be classified as young, intermediate and old based on the years the landfill is in operation. These types of leachate can be defined according to landfill age and the value of pH, BOD<sub>5</sub>, COD and BOD<sub>5</sub>/COD ratio as summarised and shown in Tables 2.3 and 2.4.

Table 2.3 Leachate classification with age of landfill

	<b>Young</b>	<b>Intermediate</b>	<b>Old</b>
Ngo et al., (2008)	<5	5-10	>10
Tchobanoglous (2002)	<2	2-10	>10
Alvarez et al., (2004)	3-12 months	1-5	>5

Table 2.4 Typical values for landfill leachate classification (Ngo et al., 2008)

<b>Parameter</b>	<b>Young</b>	<b>Intermediate</b>	<b>Old</b>
pH	6.5	6.5-7.5	>7.5
BOD <sub>5</sub>	10000-20000		50-100
COD	>10000	4000-10000	<4000
BOD <sub>5</sub> /COD	>0.3	0.1-0.3	<0.1
Organic Compounds	80% volatile fat acids (VFA)	5-30% VFA+ humic and fulvic acids	Humic and fulvic acids
Heavy metals	Low-medium	Low	Low
Biodegradability	Important	Medium	Low



From Table 2.4, the pH value for young leachate is more acidic when compared to the pH value of old leachate. A lower pH is caused by the high concentrations of organic compounds (VFAs) in a young landfill. Over time, the bacterium degrades the VFA and reduces the organic strength of leachate thus, causing a rise in pH value (Timur and Ozturk, 1999). Besides, the high amount of readily degradable volatile acids account for the bulk of the BOD and COD of young leachate. As the waste ages, the organic matter gradually decreases as they are converted into gas (Shahin, et al., 2005). A variety of heavy metals are frequently found in landfill leachates and usually, a significant amount of heavy metals found in young leachate are slowly removed by complexation and precipitation in old leachate (Calli et al., 2006). With all these compositions, young leachate proves more polluted than old leachate (Tatsi and Zouboulis, 2002).

### **2.2.3 Factors Affecting Leachate Quality**

Leachate composition or chemical quality varies significantly among landfills and it is known that different landfills will produce different qualities of leachate (Ngo et al., 2008). Research has shown that the composition of landfill leachate from the same source as well as from different sources is extremely varied. Hence, the leachate composition for a given landfill cannot be predicted from literature data since it is influenced by many parameters that are not easy to justify (Chian and DeWalle, 1976).

There are many parameters or factors that influence the quality of the leachate such as:

- i. Age of the landfill
- ii. The nature of the waste

- iii. The source of waste
- iv. The method of burial
- v. The geological nature of the site (Tengrui et al., 2007; Sabahi et al., 2009; Rouhallah et al., 2011).

Age of the landfill dominantly governs the leachate's characteristics since waste placement. The older the landfill, the more the landfill waste is biodegraded because organic compounds decrease far more rapidly in comparison to inorganic compounds (Calli et al., 2006). This is the explanation why leachate from new landfills will be higher in BOD and COD then steadily decline, levelling off after 10 years (Akyurek, 1995). Moreover, the type or nature of the waste is also a significant factor. Initial waste normally consists of finite and varying types of chemicals where the leachate will inherit the properties of the waste it flows through. Besides, leachate quality reaches a peak after two or three years followed by a gradual decline in following years (McBean et al., 1995). Table 2.5 summarises the findings of leachate characteristics from various landfills according to the age of the landfill.

Table 2.5 Landfill leachate characteristics vs. age

<b>Findings Parameter</b>	<b>Lee et al., 2010</b>	<b>Bahaa-eldin et al., 2010</b>	<b>Sanjay et al., 2009</b>	<b>Lee et al., 2010</b>	<b>Fatta et al., 1999</b>	<b>Umesh et al., 2008</b>
Landfill Age (years)	5	9	>10	15	20	>20
pH	6.8	6.7	8.33	7.3	8.44	8.35
BOD <sub>5</sub>	6350	NA	4122	870	138	NA
COD	9600	NA	6834	1510	655	NA
BOD <sub>5</sub> /COD	0.66	NA	0.6	0.5	0.13	
TOC	NA	NA	5434	NA	NA	NA
Conductivity ( $\mu$ S/cm)	NA	31.68	99510	NA	24038	26500

SS	NA	NA	NA	NA	245	NA
TDS	NA	28190	NA	NA	11618	1758
NH <sub>3</sub> -N	520	3.96	NA	523	1216	NA
Org-N	880	NA	NA	663	NA	NA
NO <sub>3</sub>	2	1.41	115	2	NA	178
F <sup>-</sup>	NA	0.27	21.37	NA	NA	NA
Cl <sup>-</sup>	1410	2047	4485	1100	4149	837
PO <sub>4</sub> <sup>3-</sup>	NA	ND	188.6	NA	13.6	13.6
SO <sub>4</sub> <sup>2-</sup>	509	12.95	796	771	356	287
Ca <sup>2+</sup>	1060	155.8	340.5	405	57.1	89
Mg <sup>2+</sup>	179	28.98	110.5	215	NA	306
K <sup>+</sup>	NA	1.62	186.5	NA	1676	135
Na <sup>+</sup>	1370	808.06	2550	1030	1984	470
As	NA	0.01	NA	NA	NA	NA
Cu	NA	0.05	0.9	NA	0.22	55.6
Cd	NA	0.001	0.93	NA	0.03	100
Cr	NA	0.01	2.87	NA	1.45	21.5
Fe	73.8	1.29	78.75	32.5	6.76	365
Pb	NA	0.05	0.84	NA	0.32	120
Mn	NA	0.63	4.15	NA	NA	423
Hg	NA	NM	NA	NA	NA	NA
Ni	NA	0.03	2.05	NA	0.67	60
Zn	NA	0.09	1.63	NA	0.53	201

\*NA is Not Analysed

\*ND is Not Detected

#### 2.2.4 Factors Affecting Leachate Quantity

As previously discussed, the amount of infiltration from precipitation that falls on a landfill is a major factor that affects the quantity of leachate potentially generated. However, the amount of leachate produced also depends on the landfill's age,

quantity of waste and the level of solid waste compaction. According to Kulikowska and Klimiuk (2008), the production of leachate in a young landfill is usually minor—around 30-40mm/year. Ehrig and Stegmann (1992) reported that the amount of leachate generated in a young Germany landfill is 15 to 25% from the annual rainfall whilst the amount for an old landfill is 25 to 50% of the annual rainfall. The level of the solid waste compaction also influences the amount of leachate generation. Rosik (2005) explained that landfills with low waste compaction would produce leachate about 40% of rainfall compared to 25% of rainfall for landfills with high waste compaction.

The amount of leachate produced from an active phase of a landfill under operation to a passive phase after closure has significant dissimilarity. This is because, after closure, the construction of the final cover will minimise the amount of water that can infiltrate through the final covers. This amount of water will percolate through the waste and generate leachate. Hence, the leachate volume generated in an active area and after closure can be obtained from the Equations 2.1 and 2.2 (Farquhar, 1989). For landfills, the free leachate retained on site,  $L_o$  must be a negative or zero value in order to ensure that there is no excess leachate produced. The amount of  $L_o$  can be obtained using the water balance equation Equation 2.3).

$$\begin{aligned} \text{Leachate volume} & \quad (\text{volume of precipitation}) + (\text{volume of pore squeeze liquid}) - \\ \text{(active phase)} = & \quad (\text{volume lost through evaporation}) - (\text{volume of water absorbed} \\ & \quad \text{by the waste}) \end{aligned} \quad (2.1)$$

$$\begin{aligned} \text{Leachate volume} & \quad (\text{volume of precipitation}) - (\text{volume of surface run-off}) - \\ \text{(after closure)} = & \quad (\text{volume lost through evapotranspiration}) - (\text{volume of water} \\ & \quad \text{absorbed by the waste and intermediate cover}) \end{aligned} \quad (2.2)$$

$$\begin{aligned} L_o = & \quad (\text{total liquid input}) - (\text{volume lost through evapotranspiration}) - \\ & \quad (\text{absorption capacity of waste} \times \text{weight of waste disposed}) \end{aligned} \quad (2.3)$$

### **2.3 Groundwater Formation**

According to the earth's water distribution, groundwater makes up more than one-fifth of earth's total fresh water supply (Liu et al., 2011). Groundwater is replenished by rain, snow, sleet and hail that infiltrates into the ground's solid materials that are actually porous. Materials with high porosity and permeability such as gravel, rock soil, sand and limestone can contain and transmit a large amount of water compared to materials with low porosity such as clay (University of New South Wales, UNSW, 2011). An area or a depth where the ground is filled or saturated with water is known as aquifer. Aquifer can transmit groundwater from an area of recharge to an area of discharge and provide a storage medium for usable quantities of groundwater.

#### **2.3.1 Groundwater Quantity and Quality**

In most countries, groundwater contamination is one of the least recognised environmental problems. This is due to the fact that the amount of groundwater used for water supply is minor compared to surface water. Thus, groundwater problems are not readily detected and pathways for contamination are not nearly as noticeable as those affecting surface water (Adeyemi et al., 2007).

However, for certain rural areas that are not connected to water distribution systems and lacking in clean water, they highly utilise groundwater as the main water supply (Mohamad Roslan et al., 2007). In addition, it has been reported that some states in Malaysia such as Kelantan, Perlis, Terengganu, Pahang, Kedah, Sabah and Sarawak have taken groundwater as an alternative for clean water (Mohamed Azwan, 2000). Moreover, during water crises and dry spells, groundwater is used as a source for emergency water supply. As it is being used for portable purposes, its quantity and quality remains an issue of concern (Noraini, 2003). The groundwater quantity and

quality can be affected by increased demands for water (Steinman et al., 2007). Large-scale pumping caused water levels in wells to decline and when the groundwater levels are drawn down below the confining layer, it can lead to water quality impairments (Islam and Bernuth, 2003).

For surface water like rivers, there is a standard known as the National Water Quality Standard for Malaysia that can be referred to in order to classify the river's water quality. Unfortunately, the suitable index to assess groundwater is yet to exist in Malaysia (Mohamad Roslan, 2007). Hence, some researchers evaluate the quality of groundwater according to the Guidelines of Raw Drinking Water Quality Benchmark for Groundwater Quality (as shown in Table 2.6) and Malaysian Environmental Impact Assessment Guidelines for Groundwater (Taha et al., 2011).

Table 2.6 National Guidelines for Raw Drinking Water Quality (Ministry of Health, 2000)

<b>Parameter</b>	<b>Symbol</b>	<b>Benchmark</b>
Sulphate	SO <sub>4</sub>	250 mg/l
Hardness	CaCO <sub>3</sub> SO	500 mg/l
Nitrate	NO <sub>3</sub> SO	10 mg/l
Coliform	-	Must not be detected in any 100 ml sample
Manganese	Mn	0.1 mg/l
Chromium	Cr	0.05 mg/l
Zinc	Zn	3 mg/l
Arsenic	As	0.01 mg/l
Selenium	Se	0.01 mg/l
Chloride	Cl	250 mg/l
Phenolics	-	0.002 mg/l
TDS	-	1000 mg/l
Iron	Fe	0.3 mg/l
Copper	Cu	1.0 mg/l
Lead	Pb	0.01 mg/l
Cadmium	Cd	0.003 mg/l
Mercury	Hg	0.001 mg