

**REGENERATION POTENTIAL OF BENTONITE
BASED THIN COATED ADSORBENT**

MOMINA

UNIVERSITI SAINS MALAYSIA

2019

**REGENERATION POTENTIAL OF BENTONITE BASED THIN COATED
ADSORBENT**

by

MOMINA

**Thesis submitted in fulfilment of
requirements for the degree of
Master of Science**

April 2019

ACKNOWLEDGMENT

All praises are due to Almighty God, the Cherisher, and the Merciful who showed his gracious blessing upon me, showed me the right path and enabled me to achieve this target.

I am highly indebted to my main supervisor, Associate Professor Dr. Suzylawati Ismail, for her encouragement, indispensable guidance, in shaping the destiny of this thesis. I am humbled by your motivational styles, encouragements, and extra support you rendered to me towards completing my studies. May almighty God reward you bountifully.

My appreciation also goes to Professor Dr. Abdul Latif Ahmad, Professor Dr. Ahmad Zuhairi Abdullah, Associate Professor Dr. Derek Chan Juinn Chieh, Dr. Masrina Mohd Nadzir, Associate Professor Dr. Syamsul Rizal Abd Shukor, Professor Ir. Dr. Zainal Ahmad and Professor Dr. Azlina Harun All your kind supports are highly acknowledged. Same goes to all the technical staff of School of Chemical Engineering, USM

I also appreciate to other postgraduate students and my colleagues; Syahida Farhan binti Azha, Nuraffini Kamarulizam, Shazlina Abd. Hamid, Faraziehan Senusi, Aiizat Ikhwan bin Abdul Jalil and Muhamad Sharafee Shamsudin and other faculty members; Dr. Muhammad Shahadat and Dr. Benjamin Jack Ballinger for their motivation during this work.

I am also grateful to all my teachers from Department of Chemical and Petroleum Engineering , Aligarh Muslim University, Aligarh, with special thanks to Dr Sadaf Zaidi, Dr. Syed Akhlaq Ahmad, Mr. Naseem Ahmad Khan, Dr. Mohammad Danish, Ms. Moina Athar and Mr. M. Abdul Hakeem who stood by me during this work.

My heartfelt of gratitude goes to my all cousins with special thanks to my Grandmother for her immense love, encouragement and support to make my Master a huge success. My sincere appreciation goes to my father Professor Anees Ahmad, mother Mrs Husna Begam, brothers Mohd Anas Anees and Mohd Talha Anees, sister in law Aisha Siddiqa, fiancé Md. Arif, and my future Father and Mother in laws Mr. and Mrs. Md. Moinul Haque for their patience, courage, love and support during my work.

Finally, I would like to thank Universiti Sains Malaysia for providing research facilities and USM fellowship to successfully complete my work.

Momina
USM Engineering Campus, Nibong Tebal,
Pulau Pinang, Malaysia
January, 2019

TABLE OF CONTENTS

ACKNOWLEDGMENT	ii
TABLE OF CONTENTS	iv
LIST OF TABLES	ix
LIST OF FIGURES	xi
LIST OF PLATES	xiv
LIST OF SYMBOLS	xv
LIST OF ABBREVIATIONS	xvi
ABSTRAK	xvii
ABSTRACT	xix
CHAPTER 1	1
1.1. Water pollution	1
1.2. Textile industries in Malaysia	2
1.3. Effluents from textile industries	3
1.4. Adsorption and desorption of effluents	4
1.5. Thin coated adsorbent layer (<i>PaintosorpTM</i>)	6
1.6. Problem statement	6
1.7. Research objectives	8
1.8. Scope of study	9
CHAPTER 2	11
2.1. Textile dyes	11
2.2. Dye treatment technologies	12
2.3. Adsorption	14
2.4. Adsorbents	15
2.4.1. Clay based adsorbents	16

2.4.2. Adsorption mechanism of clay	17
2.5. Regeneration techniques of clay-based adsorbents	19
2.5.1. Chemical regeneration	21
2.5.1(a). Effect of solution pH	21
2.5.1(b). Fenton regeneration	23
2.5.2. Supercritical extraction	24
2.5.3. Thermal degradation	25
2.5.4. Photocatalytic regeneration	28
2.5.5. Biological regeneration	31
2.6. Comparison of regeneration techniques	32
2.7. Isotherm model	36
2.7.1. Langmuir isotherm model	36
2.7.2. Freundlich isotherm model	37
2.7.3. Redlich-Peterson isotherm model	38
2.7.4. Sips isotherm model	39
2.8. Kinetics model	39
2.8.1. Pseudo-first order kinetic model	40
2.8.2. Pseudo-second order kinetic model	40
2.9. Thermodynamics study	41
2.10. Summary	41
CHAPTER 3	43
3.1. Introduction	43
3.2. Materials and chemicals	43
3.3. Preparation of adsorbate and adsorbent	45
3.3.1. Adsorbate	45

3.3.2. Adsorbent	46
3.3.3. Preparation of adsorbent coating	46
3.3.4. Calibration curve	47
3.4. Adsorption studies	47
3.5. Regeneration study	48
3.5.1. Desorption studies	48
3.5.1(a). Chemical regeneration	48
3.5.1(b). Thermal regeneration	49
3.5.1(c). Combined method	50
3.5.2. Lifespan of adsorbents	50
3.5.2(a). Chemical regeneration	50
3.5.2(b). Thermal regeneration	51
3.5.2(c). Combined method	52
3.5.3. Characterization of adsorbent	52
3.5.3(a). Scanning electron microscopy (SEM) & energy dispersive X-ray (EDX)	53
3.5.3(b). Fourier transform infrared (FTIR)	53
3.5.3(c). Thermogravimetric and differential thermal analysis (TGA/DTA)	53
3.5.3(d). BET analysis	54
3.5.3(e). Particle size distribution (PSD)	54
3.5.4. Effect of different parameters for the desorption of MB	55
3.5.4 (a). Effect of solvents and their concentration	55
3.5.4 (b). Effect of solvent volume	55
3.5.4 (c). Effect of particle size of adsorbent	55

3.5.4 (d). Effect of temperature of solvent	56
3.5.4 (e). Effect of different initial dye concentration	56
3.5.4 (f). Effect of contact time	56
CHAPTER 4	58
4.1. Desorption efficiency of MB using three methods	58
4.1.1. Role of solvents in desorption of MB from <i>PaintosorpTM</i> (Chemical Regeneration)	58
4.1.2. Role of heating in desorption of MB from <i>PaintosorpTM</i> (Thermal Regeneration)	61
4.1.3. Role of combined effect of chemical and thermal treatment on desorption of MB (Thermo-chem regeneration method)	65
4.2. Lifespan of adsorbent	66
4.3. Characterization of adsorbent	69
4.3.1. Scanning electron microscopy (SEM)	69
4.3.2. Energy dispersive x-ray (EDX)	71
4.3.3. Fourier transform infrared (FTIR)	75
4.3.4. BET analysis	77
4.4. Effect of different parameters on desorption of MB	78
4.4.1. Effect of temperature of solvents	78
4.4.2. Effect of solvent concentration	80
4.4.3. Effect of solvent volume in chemical regeneration	82
4.4.4. Effect of particle size of adsorbent	83
4.4.5. Effect of initial dye concentration	84
4.4.6. Adsorption/desorption isotherms	89
4.4.7. Effect of contact time	96

4.4.8. Kinetic model	97
4.4.9. Desorption thermodynamics	109
4.4.10. Desorption mechanism	112
CHAPTER 5	119
5.1. Conclusion	119
5.2. Recommendation and future study	121
REFERENCES	122
APPENDICES	
APPENDIX A: Standard curve of MB with different solvents.	
APPENDIX B: Physical properties of solvents	
APPENDIX C: Isotherm and kinetic model graphs	
LIST OF PUBLICATIONS	

LIST OF TABLES

		Page No
Table 2.1.	Advantages and disadvantages of different techniques for the removal of dyes	13
Table 2.2.	Overview of regeneration techniques	34
Table 3.1.	List of materials and chemicals	43
Table 3.2.	Physical properties and molecular structure of MB	45
Table 4. 1.	Peaks appeared at different temperature in TGA/DTA analysis	63
Table 4.2.	EDX analysis results	74
Table 4.3.	BET analysis results of <i>Paintosorp</i> TM before and after desorption of MB	77
Table 4.4.	Langmuir, Freundlich, R-P, Sips models constant and correlation coefficients for desorption of MB from <i>Paintosorp</i> TM at 30-60 °C for thermo-chem method.	91
Table 4.5.	Langmuir, Freundlich, R-P, Sips models constant and correlation coefficients for desorption of MB from <i>Paintosorp</i> TM at 30-50 °C for chemical regeneration method.	94
Table 4.6.	Kinetic model parameters for desorption of MB using thermo-chem method at 60 °C	104
Table 4.7.	Kinetic model parameters for desorption of MB using thermo-chem method at 50 °C	105
Table 4.8.	Kinetic model parameters for desorption of MB using thermo-chem method at 40 °C	106
Table 4.9.	Kinetic model parameters for desorption of MB using chemical regeneration method at 50 °C	107
Table 4.10.	Kinetic model parameters for desorption of MB using chemical regeneration method at 40 °C	108
Table 4.11.	Thermodynamic parameter for removal of MB from <i>Paintosorp</i> TM .	111
Table 4.12.	Intraparticle diffusion parameters for desorption of MB from <i>Paintosorp</i> TM at 60 °C	116

Table 4.13.	Intraparticle diffusion parameters for desorption of MB from <i>Paintosorp</i> TM at 50 °C	117
Table 4.14.	Intraparticle diffusion parameters for desorption of MB from <i>Paintosorp</i> TM at 40 °C	118

LIST OF FIGURES

	Page No
Figure 1.1. The percentage of textile effluent disposal that contribute to water pollution for various states in Malaysia	3
Figure 2.1. Structure of bentonite	17
Figure 2.2. Basic regeneration techniques for the regeneration of spent adsorbents	20
Figure 2.3. Fenton regeneration mechanism for non-coated adsorbents	24
Figure 2.4. Classification of thermal degradation	26
Figure 2.5. Scheme for the photocatalytic regeneration of dye pollutants	30
Figure 3.1. Flowchart of experiment for desorption of MB from <i>Paintosorp</i> TM using chemical, thermal and thermo-chem method.	44
Figure 4.1. Effect of solvents on desorption of MB	61
Figure 4.2. Thermogravimetric analysis of a) Binder b) <i>Paintosorp</i> TM before adsorption c) <i>Paintosorp</i> TM after adsorption	62
Figure 4.3. Desorption efficiency of MB at different heating temperatures.	64
Figure 4.4. Desorption efficiency of MB by solvents after heating at 160 °C	66
Figure 4.5. Regeneration of adsorbent using ethanol and HCl as solvents	68
Figure 4.6. Regeneration of adsorbent using thermal regeneration (160°C)	68
Figure 4.7. Regeneration of adsorbent using thermo-chem effect	68
Figure 4.8. SEM images of (a) <i>Paintosorp</i> TM (b) <i>Paintosorp</i> TM after adsorption of MB (c) <i>Paintosorp</i> TM after desorption by thermal regeneration (d) <i>Paintosorp</i> TM after 5 th cycle by thermal regeneration (e) <i>Paintosorp</i> TM after desorption by chemical regeneration (f) <i>Paintosorp</i> TM after 5 th cycle by chemical regeneration (g) <i>Paintosorp</i> TM after desorption by thermo-chem method (h) <i>Paintosorp</i> TM after 7 th cycle by thermo-chem method.	70

Figure 4.9.	EDX images of (a) <i>Paintosorp</i> TM (b) <i>Paintosorp</i> TM after adsorption of MB (c) <i>Paintosorp</i> TM after desorption by thermal regeneration (d) <i>Paintosorp</i> TM after 5 th cycle by thermal regeneration (e) <i>Paintosorp</i> TM after desorption by chemical regeneration (f) <i>Paintosorp</i> TM after 5 th cycle by chemical regeneration (g) <i>Paintosorp</i> TM after desorption by thermo-chem method (h) <i>Paintosorp</i> TM after 7 th cycle by thermo-chem method	72
Figure 4.10.	FTIR analysis of <i>Paintosorp</i> TM before and after desorption processes.	76
Figure 4.11.	Effect of temperature of solvents on desorption of MB (a) Chemical regeneration (b) Thermo-chem method	79
Figure 4.12.	Effect of acid to alcohol ratio on desorption of MB for thermo-chem and chemical method	81
Figure 4.13.	Desorption of MB using different volume of ethanol in chemical regeneration.	81
Figure 4.14.	Effect of particle size of adsorbents on desorption efficiency of MB (Before grinding (>40 μm) and after grinding (<40 μm)	84
Figure 4.15.	Effect of initial MB concentration on desorption capacity at different temperatures (a) Thermo-chem regeneration (b) Chemical regeneration	85
Figure 4.16.	Effect of initial MB concentration on desorption efficiency at different temperatures (a) Thermo-chem regeneration (b) Chemical regeneration	87
Figure 4.17.	Linearized plot of (a) Langmuir (b) Freundlich (c) Sips (d) R-P model for thermo-chem regeneration method	90
Figure 4.18.	Linearized plot of (a) Langmuir (b) Freundlich (c) Sips (d) R-P model for chemical regeneration method	95
Figure 4.19.	Desorption efficiency of MB with respect to contact time for (a) chemical regeneration (b) thermo-chem regeneration	97
Figure 4.20.	Pseudo first order plot for thermo-chem regeneration method (a) 60°C (b) 50 °C (c) 40 °C	100
Figure 4.21	Pseudo second order plot for thermo-chem regeneration method (a) 60°C (b) 50 °C (c) 40 °C	101

Figure 4.22.	Pseudo first order plot for chemical regeneration method (a) 50 °C (b) 40 °C	102
Figure 4.23.	Pseudo second order plot for chemical regeneration method (a) 50 °C (b) 40 °C	103
Figure 4.24.	Thermodynamic study for desorption of MB from <i>PaintosorpTM</i> using plot of (a) $\ln K_s$ versus $1/T$ and (b) $\ln K_2$ vs $1/T$.	110
Figure 4.25.	q vs $t^{0.5}$ plot for desorption of MB at (a) 60 °C (b) 50 °C (c) 40 °C	115

LIST OF PLATES

		Page No
Plate 3.1	Adsorbent coating layer on (a) glass plate and (b) glass beaker	46
Plate 3.2	Procedure for studying lifespan of adsorbents using chemical method (a) scratched coating (b) adsorbent treated with solvent (c) regenerated adsorbent mixed with binder (d) adsorbent coating on glass plate for 2 nd adsorption of MB	51
Plate 3.3	Procedure for studying lifespan of adsorbents using thermal method (a) scratched coating (b) heated adsorbent (c) regenerated adsorbent mixed with binder (d) adsorbent coating on glass plate for 2 nd adsorption of MB	52
Plate 4.1.	Coating with heating at 200°C and without heating in a) first cycle b) second cycle.	65
Plate 4.2.	a) Adsorption of MB on coating b) Desorption of MB by HCl from coating.	67
Plate 4.3.	Effect of initial MB concentration after desorption (a) <i>Paintosorp</i> TM after adsorption (initial MB concentration is 50 ppm). <i>Paintosorp</i> TM after desorption by thermo-chem method; (b)30 mg/L (c) 50 mg/L (d) 100 mg/L (e) 150 mg/L (f) 200 mg/L	89

LIST OF SYMBOLS

q_e	Quantity of dye (mg/g) adsorbed/desorbed at equilibrium
Q_m	Maximum adsorption capacity of adsorbent (mg/g)
K_L	Constant of Langmuir isotherm (L/mg)
C_e	Equilibrium concentration of dye (mg/L)
K_F	Freundlich isotherm constant [(mg/g) (L/mg) ^{1/n}]
$1/n$	Adsorption intensity or factor of heterogeneity
b_{RP}	Redlich-Peterson isotherm constant [L/mg]
α_R	Redlich-Peterson isotherm exponent
K_S	Sips isotherm model constant (L/g)
α_S	Sips isotherm model exponent
β_S	Sips isotherm model constant (L/mg)
q_t	Quantity of adsorbate adsorbed (mg/g) at time t
k_1	Rate constant of pseudo first order (1/h)
k_2	Rate constant of pseudo second order (1/h)
ΔH	Enthalpy
ΔS	Entropy
ΔG	Gibb's free energy
E_a	Activation energy
R	Universal gas constant
A	Arrhenius factor
R^2	Correlation coefficient

LIST OF ABBREVIATIONS

AC	Activated carbon
BET	Brunauer, Emmett and Teller
DTA	Differential thermal analysis
EDX	Energy dispersive X-ray
FTIR	Fourier transform infrared
MB	Methylene blue
PSD	Particle size distribution
PS1	Pseudo first order model
PS2	Pseudo second order model
R-P	Redlich-Peterson
RMSE	Root mean square error
SEM	Scanning electron microscopy
TGA	Thermogravimetric analysis

POTENSI PEMULIHAN LAPISAN PENJERAP NIPIS BERASASKAN BENTONIT

ABSTRAK

Penjerapan adalah salah satu kaedah yang digunakan secara meluas untuk merawat air sisa kerana ia adalah kos efektif, mesra alam dan sangat cekap. Lapisan penjerap berasaskan bentonit telah diperkenalkan untuk mengatasi masalah yang berkaitan penggunaan penjerap dalam bentuk pelet, granul, serbuk atau bentuk zarah lain, Kapasiti penjerapannya meningkat kerana nisbah permukaan kepada berat permukaan meningkatkan. Penting untuk pemulihan semula penjerap sebelum dibuang ke persekitaran. Oleh itu, kajian ini memberi tumpuan kepada kebolehsanaan pemulihan semula lapisan penjerap berasaskan bentonit menggunakan tiga kaedah yang berbeza; kebolehsanaan pemulihan secara kimia, kebolehsanaan pemulihan secara terma dan gabungan antara terma dan kimia. Kebolehsanaan pemulihan secara kimia didapati tidak sesuai dengan kecekapan penyahjerapan MB hanya sebanyak 22 % menggunakan etanol. Sebaliknya, kesan terma boleh melonggarkan ikatan antara bahan jerap dan penjerap, tetapi tidak dapat memecahkan sepenuhnya ikatan antara penjerap dan MB pada suhu 160 °C. Gabungan kaedah kebolehsanaan pemulihan terma dan kimia berkesan menghilangkan MB dengan kecekapan penyahjerapan sebanyak 74 % menggunakan HCl selepas pemanasan pada suhu 160 °C untuk kepekatan pewarna awal sebanyak 50 ppm. Juga, hasil penjerapan / penyahjerapan MB menggunakan lapisan penjerap berjaya digunakan sehingga 7 kali kitaran. Pencirian *PaintosorpTM* sebelum dan sesudah penyahjerapan pewarna telah dinilai menggunakan analisis TGA / DTA, SEM, EDX, BET, PSD dan FTIR. Kajian penyahjerapan MB secara berkelompok menunjukkan isoterma model Sips dan Freundlich adalah sesuai dan menunjukkan penyahjerapan MB berlaku secara banyak lapisan di permukaan

lapisan penjerap. Kinetik penyahjerapan sesuai dengan model pseudo-tertib kedua dan menunjukkan mekanisme penyahjerapan berlaku kerana kecerunan kepekatan, kelarutan dan penyebaran bahan pewarna MB di lapisan penjerap.

REGENERATION POTENTIAL OF BENTONITE BASED THIN COATED ADSORBENT

ABSTRACT

Adsorption is one of the widely used method for wastewater treatment since it is cost-effective, eco-friendly and highly efficient in nature. Bentonite based adsorbent coating was introduced to overcome the problem associated with the use of adsorbents in pellet, beads, powder, or other particle forms. Its adsorption capacity increases due to increase in surface area/weight ratio. It is important to regenerate adsorbent before it is disposed into environment. Therefore, this study is focused on regeneration of bentonite-based coating using three different methods; chemical regeneration, thermal regeneration and combination of thermal and chemical (thermo-chem) regeneration. Chemical regeneration was not found to be suitable for the regeneration of bentonite adsorbent coating with 22% desorption efficiency of MB using ethanol. Rather, thermal effect can loosen the bonds between adsorbate and adsorbent, but unable to completely break the bond between MB and adsorbent coating at 160°C. The thermo-chem method effectively desorbed MB with desorption efficiency of 74 % using HCl after heating adsorbent coating at 160 °C for initial dye concentration of 50 ppm. Also, regeneration study results confirm successive adsorption/desorption of MB on adsorbent coating even after 7th cycle. The characterization of *Paintosorp*TM before and after desorption of dye has been performed using TGA/DTA, SEM, EDX, BET, PSD and FTIR analysis. Batch desorption study of MB results Sips and Freundlich isotherm model are best fitting which shows that desorption of MB occurs from multilayer adsorbed MB on adsorbent coating. However, kinetic model best fitting with pseudo second order model and confirms that desorption mechanism is due to concentration gradient, solubility and diffusivity of MB.

CHAPTER 1

INTRODUCTION

1.1. Water pollution

We are living in challenging times where there have been substantial changes in the climate pattern of the planet due to excessive and irresponsible industrial and individual activities. The planet is trying to cope up with these unwanted intrusions by mankind with its own healing mechanisms. But the scientists and researchers are convinced that if something concrete and substantial is not done to slow up the disturbance with nature`s ecology, the life on the planet in general and humans in particular will not survive long, the effect of which has already been started showing up. Water pollutions is one of the major causes for the death of millions of aquatic lives. Some species such as turtle, whales, hector`s dolphins are already extinct while many are on the verge of extinction. More than one third of people in world are affecting the lack of improved sanitation and safe drinking water (Roshni, 2018). According to World health organization, half of population of world will be affected by lack of water until 2025 (WHO, 2018). Water has the property of cleansing itself from pollutant by diluting the pollutant to a point where they are not in harmful concentration (Soheila, 2012).

The exposure to pathogens or to chemical toxicant via food chain is a threat for humans and animals (Dwivedi *et al.*, 2018). Consumption of such contaminated water responsible for estimated annual burden of 2 million diarrheal deaths (UNESCO, 2017). The water in oceans is 97% of total earth water, 2 % of the remaining is fresh water. 67 percent of the fresh water is trapped in glaciers and icebergs. Remaining 33% of the 3% is divided among surface water, groundwater and other sub sources is available for human consumption (Jayaswal *et al.*, 2017). Although there is enough

drinking water, at present, for every living creature on Earth, some of the sources are ill managed while some others are prone to pollution.

Industrial effluent discharge is the major source of water pollution. Industries like textile industries consumes large amount of water and generate almost 90% of wastewater (Mondal *et al.*, 2017a). The textile industries using different types of dyes for colouring of fabric in large numbers which are disposed in water bodies. The textile dyeing contributes to 17-20% of industrial water pollution as per the reports of World Bank (Kant, 2012). Pollutants mainly consist of 72 types of toxic chemical elements, 30 of which cannot be removed from water (Liu *et al.*, 2018b). Thus, huge amount of wastes produced by textile manufacturers can have serious environmental impact on quality of water (Sandins and Peters, 2018).

Governments of various nations have imposed many regulations and laws on the industries, but these laws are regularly violated, and their implementation is subject to the abilities of the governments to check such violations. Industries, on the other hand need a cheap and sustainable solution for treating the waste water effluent before discharge to the water bodies.

1.2. Textile industries in Malaysia

Textile industry in Malaysia has emerged as one of the promising industries from past to future due to its great demand in the world market. Malaysia, as one of the developing countries has strengthened its position in the textile and clothing industry. The Malaysian's textile major export markets and apparel are United States, Canada, Turkey and European Union. It was reported that Malaysia is the eleventh largest exporter in 2017 which is 2.6% of Malaysia's total export of manufactured goods (MIDA, 2018). The total investment that had been done in year 2017 for 12 projects of textile products in Malaysia is RM 428.8 million in which 25.8% are domestic

investment and 75.2% is international investment . These projects generates total 1850 employment opportunities for the position of engineers, quality controllers and high skilled technicians (MIDA, 2018). Therefore, due to large amount of textile produced, it indicates that large amount of wastewater containing pollutants is generated. The percentage of textile effluent that contributes to water pollution by different states in Malaysia are shown in Figure 1.1. Johor (28.6%) and Pulau Pinang (28.2%) are highest sources of water pollution among all states of Malaysia. The effluent of textile industry consists of colour, high chemical oxygen demand, suspended solid and toxicity. Hence, the effluent should be treated properly to remove the colour and reduce COD level to meet Malaysia Environmental Quality Act (1974) for industrial effluent standard discharge limit.

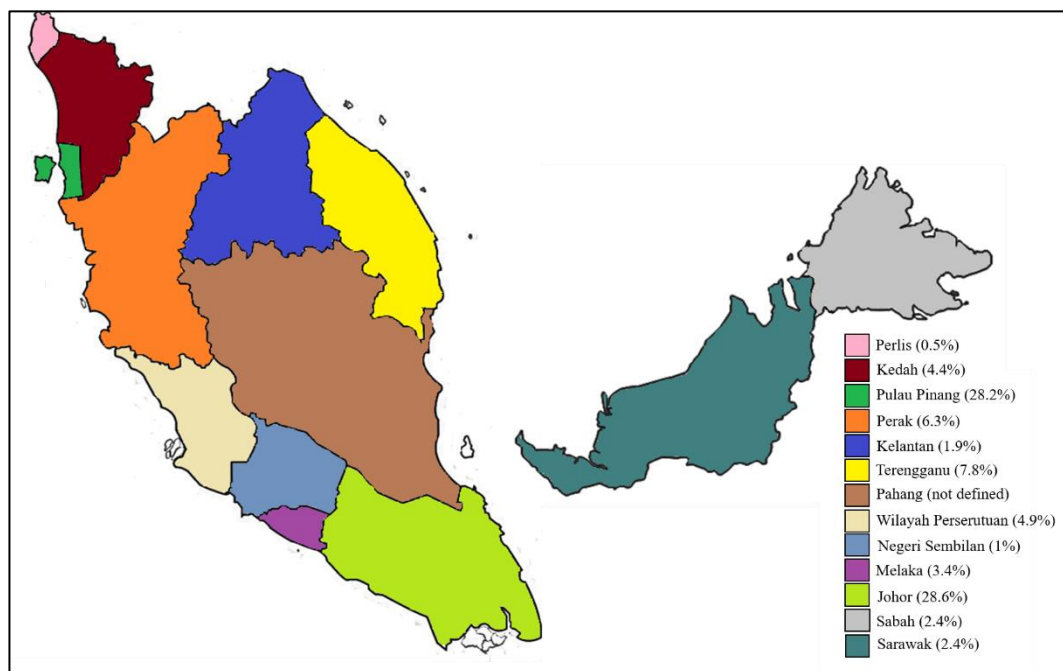


Figure 1.1. The percentage of textile effluent disposal that contribute to water pollution for various states in Malaysia (Pang and Abdullah, 2013)

1.3. Effluents from textile industries

Textiles industry has the major share in the worlds water footprints and dyeing is the biggest problem both in terms of water use and pollution. They produce large amount of effluents start from washing off to bleaching, dyeing, and washing of

finishing products and are discharged into environment. Effluents such as dyes are 100,000 commercially available and 7×10^5 tons of dyestuff produced annually worldwide (Rahman *et al.*, 2018). In addition, it is reported that the dyeing process is inefficient which results in loss of 200,000 tons of dyes every year to effluents during the dyeing and finishing operations (Chequer *et al.*, 2013). Also, dyes cannot be biodegraded because of their complex structure are synthetic in nature (Rahman *et al.*, 2018). Therefore, long term exposure such dyes can cause health hazards and should be treated with care.

The inhalation of dye particles causing most common hazard that is respiratory problems. The organic dyes may produce carcinogenic aromatic amines if the effluent is not treated completely. Besides that, the highly visible colour will also block the sunlight through the water and interrupt photosynthesis process of plant affecting the life in aquatic ecosystem. In addition, dyes cause micro toxicity to aquatic life (Saini, 2018). Dyes are in very small amount as a pollutant in water but still they greatly affect the visibility of water. It also effect the aesthetic quality and transparency of lakes and rivers and adversely affect the aquatic environment (Hema and Suresha, 2015). Therefore, it is mandatory to treat the dye containing water before discharging into environment or water bodies. Several methods were used for this purpose.

1.4. Adsorption and desorption of effluents

Dyes from wastewater can be removed by physicochemical, chemical and biological methods. Due to the non-biodegradable nature of most of the dyes cannot be removed by biological and chemical techniques. Nowadays, few methods are being used by industries for the removal of dyes from wastewater such as adsorption, coagulation flocculation, ion exchange, chemical oxidation, catalytic oxidation,