

Effect of Chemical Pulping Black Liquor Addition on Thermophilic Anaerobic Digestibility of Palm Oil Mill Effluent (POME)

*Norli, I.², Nik Norulaini, N.A.¹, Ling, Y.L.², Mohd Omar, A.K.²

¹ School of Distance Learning, Universiti Sains Malaysia, 11800 Minden, Penang, Malaysia.

² Department of Environmental Technology, School of Industrial Technology, Universiti Sains Malaysia, 11800 Minden, Penang, Malaysia.
norlii@usm.my

Abstract

The feasibility of anaerobic digestion treating palm oil mill effluent (POME) with addition of chemical pulping wastewater (black liquor) was studied in semi-continuous fed digesters under thermophilic (55°C) condition. The anaerobic digestibility of POME with and without addition of black liquor (2.5% and 5% by volume) was compared. The chemical oxygen demand (COD) reduction for hydraulic retention time (HRT) of 5 days and 10 days were examined to evaluate the effect of HRT on the performance of the digesters. The results depicted that COD reduction could be achieved up to 87% in the digester without black liquor and 79% reduction in COD with black liquor added. The results of this work could be used as a basis to enhance the possibility of anaerobic digestion in treating the chemical pulping wastewater which is initially known difficult to degrade biologically.

Keywords POME, chemical pulping black liquor, anaerobic digestion, thermophilic, COD

Introduction

Malaysia is the world largest producer and exporter of palm oil. Approximately 13.98 million tonnes of crude palm oil (CPO) were produced in the year 2004 which increased by 4.7% from 13.35 million tonnes in the year 2003 [1]. POME is considered as one of the most polluting agro-industrial residues due to its high organic load. The three main sources of POME are sterilizer condensate, hydrocyclone waste and clarifier sludge. The mixed POME is characterized by low pH (average 4.0), high chemical oxygen demand COD (60-90 g/L) and high suspended solid SS (20-40 g/L). For a well-controlled conventional oil palm mill, about 0.9 m³, 0.1 m³ and 1.5 m³ of sterilizer condensate, clarifier sludge and hydrocyclone waste are generated for each tonne of crude palm oil produced [2].

The biological ponding system is developed rapidly as a typical POME treatment system in Malaysia. This system consists of deoiling ponds, anaerobic, facultative and aerobic ponds. The anaerobic digestion systems are being increasingly used in wastewater treatment especially in agro-industry because they do not require high energy demanded as in aerobic biological treatment, produce less waste sludge and they can be easily restarted after months of shut down. The potential of producing methane, a biogas as a by-product make this method even more attractive.

Examples of various POME treatments were presented. POME treatment using membrane technology showed a reduction in turbidity, COD and BOD up to 100%, 98.8% and 99.4% respectively [4]. Two-stage up-flow anaerobic sludge blanket system could work efficiently up to 30g/liter/day COD whilst methane yield and COD reduction greater than 90% [2]. COD removal efficiencies greater than 94% obtained in single stage anaerobic tank digester and single stage anaerobic ponding system after 10 days of retention time [5]. A work carried out [6] showed COD removals higher than 90% in both anaerobic filter and anaerobic fluidized bed reactor at loading of 10 g/liter/day. 88% COD removal was obtained with 55h HRT using attached growth on a rotating biological contactor [7].

Pulping is the largest source of pollution in the paper making industry especially chemical pulping which generates high-strength wastewater [8]. The pulping wastewater is called black liquor contains high pH, COD, and dark in colour. In the present study, the anaerobic digestibility

of POME with and without addition of black liquor was studied in semi-continuous single stage digester reactors with 5 and 10 HRT. The system performances were evaluated by COD removal.

Materials and Methods

Samples

The POME used in this study was obtained from Malaysia Palm Oil Sdn Bhd. The samples were collected in 5L container and refrigerated. The black liquor (BL) derived from the chemical pulping of palm oil empty fruit bunch was collected from Division of Bioresource, Paper and Coating in School of Industrial Technology, USM.

Start-up and digestion condition

A total of four reactors with working volume 1000 ml each were used to study the anaerobic digestibility of POME at thermophilic temperature (55°C). Two reactors for raw POME with black liquor (A and B) and two reactors for POME as control (C and D). The reactors were seeded with digested POME from the anaerobic pond of above palm oil mill. The pH in each digester was controlled to an optimum pH range (6.8-7.8) by adjusted the pH with sodium bicarbonate NaHCO₃ (39g/L) and 1:1 hydrochloric acid HCl. Mixed liquor volatile suspended solid (MLVSS) analysis was carried out three times a week to monitor the microbial growth inside the digesters. After 100 days of acclimation, digestion of POME (as control) and POME with addition of black liquor (2.5%, 5%) was carried out at 5 and 10 days HRT. The substrates were purged with nitrogen gas prior to fed semi-continuously by means of a peristaltic pump. The reactors were kept at 55°C in water bath. Six runs of three set experiments were carried out in this study and there was a week of rest time within each run. Each set with two replicates in two reactors was carried out simultaneously.

Analytical methods

The effluent COD from the digester was analyzed daily during the digestion period for each run experiment while the MLVSS was analyzed three to four times per run of experiment. COD in both the feed and effluent samples, MLSS and MLVSS were determined according to the Standard Methods [9].

Statistical Analysis

The effects of black liquor added on POME anaerobic digestibility were analyzed using two-way analysis of variance (ANOVA). Two-way ANOVA was used to detect any significant differences at $P = 0.05$ in effluent COD. All data were analyzed by SPSS (Statistical Package for Social Science) for Window Release 12.0 using an IBM Pentium PC.

Results and Discussion

pH trend during start-up and degradation process

Figure 1 shows the pH trends of reactors for raw POME with black liquor (A and B) and reactors for control (C and D) along the acclimation and degradation periods. The pH in each reactor was adjusted to a range of 6.8 to 7.8 to prevent methanogenesis inhibition. The lower pH during the start-up indicated that acidogenesis occurred where the substrates were hydrolyzed to form organic acids. The drop in pH directly caused the instability of the digesters [10]. A stable anaerobic digestion process was occurred concomitantly with the pH increased along the process.

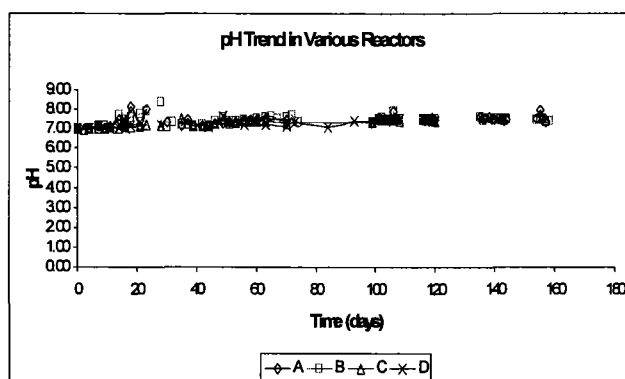


Figure 1 pH trends in various reactors.

Microbial growth during start-up and degradation process

The biomass or microbial growth was measured by analyzing the MLVSS of mixed liquor sample in each reactor. The MLVSS was analyzed three times a week during acclimation period and three to four times during each run of digestion process. The MLVSS in various reactors was shown in Figure 2. The MLVSS in each digester was above 5000 mg/L.

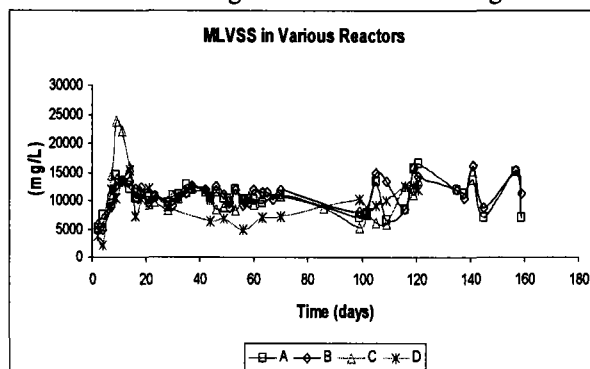


Figure 2 MLVSS concentration in various reactors

COD Removal

The average feed COD for each run was tabulated in Table 1. The percent of COD removal in various reactors is tabulated in Table 2. Feed and HRT were found significantly (at 95% confidence level) affected the percentage of COD removal (Table 3).

Table 1 Average feed COD for different set experiments during degradation process with 5 and 10 days HRT

Feed	COD (mg/L)	
	5 HRT	10 HRT
POME	80570±5325	82370±8370
1BL : 39 POME	82270±4236	81290±7925
1BL : 19 POME	83440±3491	86694±4311

Table 2 Percentage of COD removal of the effluent in various reactors during degradation process with 5 and 10 days HRT

Reactor	COD removal (%)	
	5 HRT	10 HRT
Control	83.3	87.7
Control	82.4	86.8
1BL : 39 POME	76.9	76.3
1BL : 39 POME	78.5	77.4
1BL : 19 POME	73.4	80.3
1BL : 19 POME	74.8	77.4

Table 3 P value denotes the significant differences among feed and HRT on COD removal by the Two-way ANOVA at P = 0.05.

Factors	COD Removal
Feed	0.000
HRT	0.006
Feed*HRT	0.023

Figure 3(a), (b) and (c) shows the effluent COD in various types of reactors for 5 HRT and Figure 3(d), (e) and (f) shows the effluent COD in various types of reactors for 10 HRT. The anaerobic microbial hydrolyzed the substrates into readily solubilized organic acids which can be easily consumed by methanogenic to transform it to water, biomass, methane and carbon dioxide. After the acclimation period, the digesters were ready to perform a stable digestion process. The stability of the digestion process in each digester was shown in Figures 3(a) to 3(f). The daily effluent COD in each digester displayed the same trend with no big fluctuation thus indicated stable digestibility. The highest COD removal of 87% was achieved in control reactor at 10 days HRT. As for POME reactors with addition of black liquor, 79% COD removal was achieved in digester of POME with 5% black liquor at 10 days HRT as shown in Table 2. The COD removal efficiency of digesters with addition of black liquor was slightly lower than the digester without black liquor may because of some substances in black liquor such as lignin which is not easy to degrade. The COD removal efficiency for POME reactors with addition of 2.5% black liquor is 77% and 78% at 5 and 10 days HRT while there was a difference of 5% in COD removal efficiency in digesters with 5% black liquor at 5 and 10 days HRT. The digester with higher percent of black liquor may need longer HRT to achieve better COD removal. This was the same as for the totally POME digester achieved 83% and 87% COD removal at 5 and 10 days HRT.

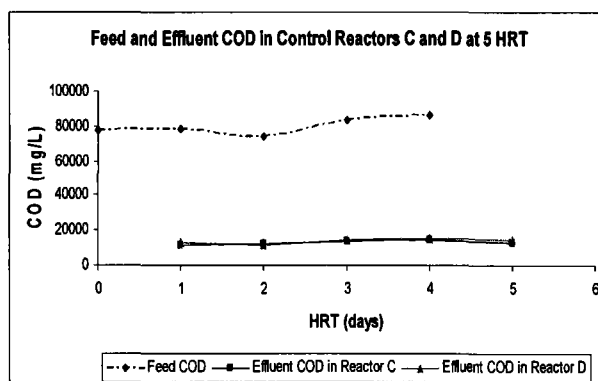


Figure 3(a) COD concentration of effluent in control reactor at 5 HRT

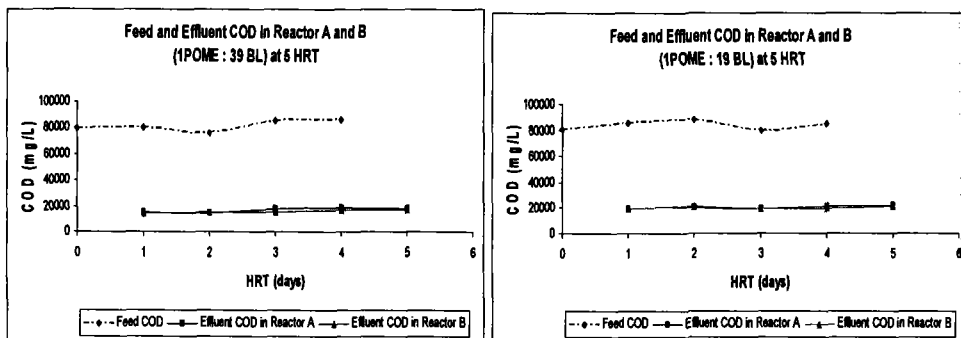


Figure 3(b) COD concentration of effluent in reactors A and B (1POME:39 BL) at 5 HRT
 Figure 3(c) COD concentration of effluent in reactors A and B (1POME:19 BL) at 5 HRT

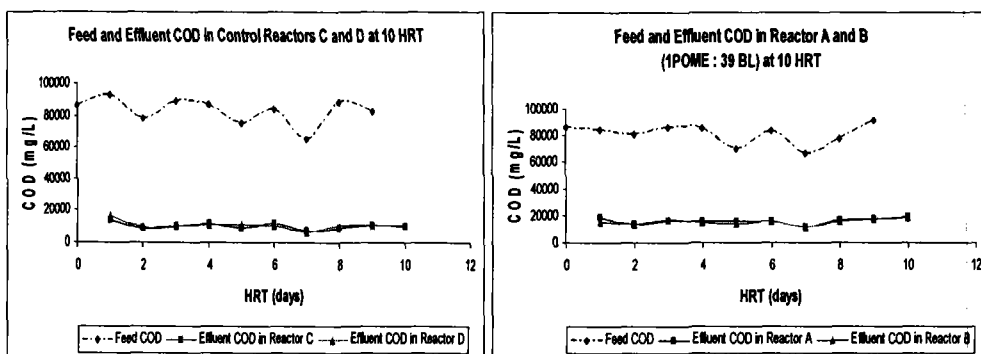


Figure 3(d) COD concentration of effluent in control reactor at 10 HRT
 Figure 3(e) COD concentration of effluent in reactors A and B (1POME:39 BL) at 10 HRT

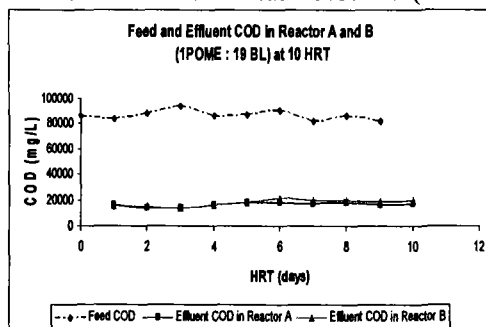


Figure 3(f) COD concentration of effluent in reactors A and B (1POME:19 BL) at 10 HRT

Conclusions

In this study it could be concluded that, feed and HRT were significantly affect the performance of POME anaerobic digestion. The addition of black liquor slightly affected the POME anaerobic digestion. The COD removal up to 79% in digesters with addition of 5% black liquor indicated that black liquor was treated by anaerobic digestion. The anaerobic digestion of POME with black liquor can reduce the environmental impact by reuse the black liquor.

References

- [1] Malaysia Palm Oil Board (MPOB) Home Page: <http://www.mpob.gov.my> (accessed March 2006).
- [2] Borja, R. and Banks, C. J. (1995). Comparison of an anaerobic filter and an anaerobic fluidized bed reactor treating palm oil mill effluent. *Process Biochemistry*, 30 (6), 511-521.
- [3] Beccari, M., Bonemazzi, F., Majone, M., Riccardi, C. (1996). Interaction between acidogenesis and methanogenesis in the anaerobic treatment of olive oil mill effluents. *Water Research*, 30 (1), 183-189.
- [4] Abdul Latif, A., Suzylawati, I., Subhash, B. (2003). Water recycling from palm oil mill effluent (POME) using membrane technology. *Desalination*, 157, 87-95.
- [5] Ugoji, E. O. (1997). Anaerobic digestion of palm oil mill effluent and its utilization as fertilizer for environmental protection. *Renewable Energy*, 10 (2/3), 291-294.
- [6] Borja, R., Banks, C. J., Sanchez, E. (1996). Anaerobic treatment of palm oil mill effluent in a two-stage up-flow anaerobic sludge blanket (UASB) system. *Journal of Biotechnology*, 45, 125-135.
- [7] Najafpour, G., Hii, A. Y., Younesi, H., Zinatizadeh, A. (2005). Effect of organic loading on performance of rotating biological contactors using palm oil mill effluents. *Process Biochemistry*, 40, 2879-2884.
- [8] Pokhrel, D., Viraraghavan, T. (2004). Treatment of pulp and paper mill wastewater – a review. *Science of the Total Environment*, 333, 37-58.
- [9] APHA (1992). Standard methods for the examination of water and wastewater, 18th ed. APHA, Washington, DC.
- [10] Viswanath, P., Devi, S. S., and Nand, Krishna (1992). Anaerobic digestion of fruit and vegetable processing wastes for biogas production. *Bioresource Technology*, 40, 43-48.