

**SEDIMENT TRANSPORT IN SUNGAI KULIM, KEDAH**

**CHANG CHUN KIAT**

**UNIVERSITI SAINS MALAYSIA**

**2006**



**SEDIMENT TRANSPORT IN SUNGAI KULIM, KEDAH**

by

**CHANG CHUN KIAT**

**Thesis submitted in fulfillment of the requirements  
for the degree of  
Master of Science**

**December 2006**

## ACKNOWLEDGEMENTS

First and foremost I would like to express my appreciation to my supervisor, Associate Prof. Dr. Aminuddin Abd Ghani and Associate Prof. Dr. Rozi Abdullah for their constant support, guidance and valuable suggestions for my study.

Special thanks go to Prof. Howard H. Chang from San Diego State University, USA and Prof. Pierre Y. Julien from the University of Colorado, USA for their advice and help. Prof. Howard H. Chang had kindly provided guidance and technical support in FLUVIAL-12 modeling and Prof. Pierre Y. Julien offered his constructive criticism and comments throughout this research. I would also like to thank the Department of Drainage and Irrigation (DID) Kulim/Bandar Baharu and Hydrology Division for providing river survey data, hydrological data and relevant information for this research.

I would like to express my appreciation to River Engineering and Urban Drainage Research Centre (REDAC), Universiti Sains Malaysia especially Mr. Mohamad Fauzi Ahmad Shah, Mr. Mohamad Firdaus Talib, Mr. Zakaria Ansori Rahman, Mr. Rahim Ghazali, Mr. Othman Zainuddin and to rest of the group, Mr. Chew Teck Yeow, Mr. Cheng Kok Leong, Mr. Noorazlan Amat Sihab, Mr. Nicholas Lim, Mr. Chow Soon Lee, and Ms Lim Hooi Wen for helping me in the hydraulic and sediment data collection. A special thank you to the Director of REDAC, Prof. Dr. Nor Azazi Zakaria, for giving me all the encouragement and support from the beginning until the completion of this study. I would also like to express my appreciation to my colleagues at REDAC, Dr. Lai Sai Hin, Mr. Leow Cheng Siang, Ms. Hasliza Wan Chik, Ms. Intan Faezah Darul Izham, Ms Rosmaliza Ramli, Mrs Farhah Md Radhzi, Ms. Siti Norlaila Ahmad, Mr. Nasrul

Osman and Mr. Rashid Man for their numerous help and encouragement during my research.

A hearty thank you to my parents and my ever loving wife, Mrs. Ooi Sek Chuang who had always supported and encourages to complete this study.

Chang Chun Kiat  
December 2006

## TABLE OF CONTENTS

	Page
<b>ACKNOWLEDGEMENTS</b>	ii
<b>TABLE OF CONTENTS</b>	iv
<b>LIST OF TABLES</b>	viii
<b>LIST OF FIGURES</b>	xi
<b>LIST OF ABBREVIATION</b>	xvii
<b>LIST OF SYMBOLS</b>	xviii
<b>ABSTRAK</b>	xx
<b>ABSTRACT</b>	xxii
<b>CHAPTER 1 – INTRODUCTION</b>	<b>1</b>
1.1 Background	1
1.2 Objectives	2
1.3 Study Site	2
1.4 Scope of Research	4
1.5 Structure of Thesis	5
<b>CHAPTER 2 – LITERATURE REVIEW</b>	<b>7</b>
2.1 Sediment Transport	7
2.2 Sediment Data Collection and Analysis	8
2.2.1 Sungai Kinta Catchment	8
2.2.2 Sungai Langat Catchment	17
2.2.3 Nile River Catchment	21
2.3 Sediment Transport Modeling	26
2.3.1 Model Selection	27
2.3.2 Model Applications	32
2.3 Summary	54
<b>CHAPTER 3 – METHODOLOGY</b>	<b>56</b>
3.1 Introduction	56
3.1.1 Study Area	56
3.1.2 Landuse / Development	58
3.1.3 Climate	61
3.1.4 Historical Flood	61

3.1.5	Siltation	66
3.1.6	Sedimentation Problem	67
3.1.7	Sand Mining	68
3.2	River Hydrology and Hydraulics	69
3.2.1	River Geometry Data	69
3.2.2	Rainfall Data	69
3.2.3	Streamflow Data	73
3.2.4	Water Level Record	75
3.2.5	Stage-Discharge Data	75
3.2.6	Flood Frequency Analysis	76
3.3	Field Measurement	79
3.3.1	Flow Measurement	80
3.3.2	Sediment Data Collection	80
3.3.3	Water Surface and Bed Level Measurement	83
3.4	Laboratory Test and Analysis	83
3.4.1	Sieve Analysis	84
3.4.2	Filtration Method	85
 <b>CHAPTER 4 – SEDIMENT DATA ANALYSIS</b>		 <b>87</b>
4.1	Introduction	87
4.2	Flow Hydraulics	87
4.3	Sediment Size Distributions	87
4.4	Computation of Sediment Load	92
4.4.1	Bed Load	92
4.4.2	Suspended Load	98
4.4.3	Total Load	99
4.5	Sediment Rating Curve	99
4.5.1	Bed Load	99
4.5.2	Suspended Load	100
4.5.3	Total Load	101
4.6	Cross Section Changes	102
4.7	Flow Resistance	102
4.7.1	Evaluation of Existing Equations	104
4.7.2	Flow Rating Curve	104
4.7.3	Development of New Manning's Coefficient Equations	107
4.8	Sediment Transport Equation Assessment	110

4.9	Summary	117
<b>CHAPTER 5 –SEDIMENT TRANSPORT MODELING</b>		<b>118</b>
5.1	Introduction	118
5.2	FLUVIAL-12 Model	119
5.3	Model Assumptions and Input Parameter	119
	5.3.1 Study Reach	120
	5.3.2 Geometry Data	120
	5.3.3 Historical Flood Hydrograph	122
	5.3.4 Rating Curve	124
	5.3.5 Sediment Size Distribution	125
	5.3.6 Summary	126
5.4	Model Output	127
5.5	Model Calibration and Validation	130
	5.5.1 Sensitivity Analysis	130
	5.5.2 Selection of Sediment Transport Equation	141
	5.5.3 Model Calibration	142
	5.5.4 Model Validation	147
5.6	Existing Condition Modeling	150
	5.6.1 Sediment Delivery	150
	5.6.2 Changes in Channel Geometry and Water Surface Profile	151
	5.6.3 Changes in Sediment Size	151
	5.6.4 Changes in Cross Sectional Geometry	152
5.7	Future Condition Modeling	154
	5.7.1 Design Flood Hydrograph	154
	5.7.2 Sediment Delivery	154
	5.7.3 Changes in Channel Geometry and Water Surface Profile	155
	5.7.4 Changes in Sediment Size	155
	5.7.5 Changes in Cross Sectional Geometry	156
5.8	Long-Term Modeling	158
	5.8.1 Sediment Delivery	158
	5.8.2 Changes in Channel Geometry	159
	5.8.3 Changes in Sediment Size	159
	5.8.4 Changes in Cross Sectional Geometry	160
5.9	Summary	162

<b>CHAPTER 6 – CONCLUSIONS AND RECOMMENDATIONS</b>	<b>164</b>
6.1 Conclusions	164
6.1.1 Sediment Data Collection and Analysis	164
6.1.2 Sediment Transport Modeling	166
6.2 Recommendations	167
 <b>BIBLIOGRAPHY</b>	 <b>169</b>
 <b>PUBLICATION LIST</b>	 <b>178</b>
 <b>APPENDICES</b>	
Appendix A – Comparison of Bed Material and Bed Load Size Distribution at Sungai Kulim	
Appendix B – Computation of Bed Load for CH 14390 and CH 3014 at Sungai Kulim using Seven-Point Measurement Method	
Appendix C – Computed Bed Load and Sediment Characteristic for CH 14390 and CH 3014 at Sungai Kulim	
Appendix D – Computation of Bed Load for CH 14390 and CH 3014 at Sungai Kulim using Three-Point Measurement Method	
Appendix E – Computation of Suspended Load for CH 14390 and CH 3014 at Sungai Kulim	
Appendix F – Measured and Computed $n$ from the Equations 2.1 to 2.8, Equations 4.3 and 4.4 for representative data at Sungai Kulim, Sungai Kinta and Sungai Langat	
Appendix G – Example of FLUVIAL-12 Output	



## LIST OF TABLES

	Page
2.1 Range of Field Data for Sungai Kinta Catchment (Ab. Ghani et al., 2003)	10
2.2 Summary of Discrepancy Ratio using Equations 2.7 and 2.8 for Sungai Kinta Catchment (Abdul Ghaffar, 2003)	16
2.3 Summary of Sediment Transport Equation Assessment for Sungai Kinta Catchment (Ab. Ghani, 2003)	17
2.4 Range of Field Data for Sungai Langat Catchment (Ariffin, 2004)	19
2.5 Summary of Sediment Transport Equation Assessment for Sungai Langat Catchment (Ariffin, 2004)	21
2.6 Main Characteristics of the Study Sites (Abdel-Fattah et al., 2004)	4
2.7 Measured Data at Four Study Sites, Nile River (Abdel-Fattah et al., 2004)	24
2.8 Measured and Predicted Bed Load Transport Rates at the Four Study Sites (Abdel-Fattah et al., 2004)	25
2.9 Measured and Predicted Suspended Load Transport Rates at the Four Study Sites (Abdel-Fattah et al., 2004)	25
2.10 Measured and Predicted Total Load Transport Rates at the Four Study Sites (Abdel-Fattah et al., 2004)	26
2.11 Twelve Computational Models to Predict Channel Geometry Changes (ASCE, 1998)	28
2.12 Sediment Transport Characteristics of Reviewed Models (ASCE, 1998)	29
2.13 Streambank Stability Characteristics of the Reviewed Models (ASCE, 1998)	30
2.14 Examples of Computational Models (FISRWG, 2001)	31
2.15 Simulated and Measured Volumes of Channel Scour by 1993 Floods	35
2.16 Parameter Values Used for Model Calibration	45
2.17 General Characteristics of Test Channels Applied in SDAR Model Calibration (Bahadori et al., 2006)	48
3.1 Sungai Kulim Subcatchment	57
3.2 Summary of Rainfall Distribution for the 2003 Flood (DID, 2003)	64
3.3 Inventory of Rainfall Stations	69
3.4 Estimating Rainfall Depths, 1 to 5 Days (DID, 1996)	72

3.5	Monthly Maximum and Yearly Total Rainfall for Sungai Kulim Catchment	72
3.6	Critical Levels at Ara Kuda Streamflow Station	73
3.7	Estimated Peak Flood Discharges for Sungai Kulim (DID, 1996)	74
3.8	Flood Ranking for Sungai Kulim at Ara Kuda	77
3.9	Summary of Flood Frequency Analyses for Sungai Kulim @ Ara Kuda	77
4.1	Range of Field Data at Sungai Kulim	87
4.2	Summary of Bed Material Size at CH 20000	88
4.3	Summary of Bed Material Size at CH 14390	88
4.4	Summary of Bed Material Size at CH 3014	88
4.5	Summary of Bed Material Size at CH 0	89
4.6	Summary of Bed Load Data at CH 14390	97
4.7	Summary of Bed Load Data at CH 3014	98
4.8	Summary of Computed Suspended Load at CH 14390	98
4.9	Summary of Computed Suspended Load at CH 3014	98
4.10	Summary of Total Load at CH 14390	99
4.11	Summary of Total Load at CH 3014	99
4.12	Evaluation of Manning's Equations using Equations 2.1 to 2.8 for CH 14390	105
4.13	Evaluation of Manning's Equations using Equations 2.1 to 2.8 for CH 3014	106
4.14	Predicted Values of Manning $n$ at CH 14390	109
4.15	Predicted Values of Manning's $n$ at CH 3014	109
4.16	Summary of Discrepancy Ratio for Sungai Kulim, Sungai Kinta Catchment, and Sungai Langat Using Equations 4.3 and 4.4	110
4.17	Measured and Predicted Bed Load Transport Rates at CH 14390	112
4.18	Measured and Predicted Bed Load Transport Rates at CH 3014	112
4.19	Measured and Predicted Total Load Transport Rates at CH 14390	113
4.20	Measured and Predicted Total Load Transport Rates at CH 3014	113

4.21	Summary of Sediment Transport Assessment for CH 14390	113
4.22	Summary of Sediment Transport Assessment for CH 3014	114
4.23	Summary of Hydraulics and Sediment Data at Sungai Kulim	117
5.1	Summary of Input Parameter for FLUVIAL-12	127
5.2	Summary of Sensitivity Analysis	141
5.3	Comparison of Water Level for Manning's $n = 0.025, 0.030$ and $0.035$ (13 Sept 1991)	143
5.4	Comparison of Water Level for Manning's $n = 0.025, 0.030$ and $0.035$ (18 Sept 1991)	144
5.5	Comparison of Water Level and Bed Profile for Manning's $n = 0.025, 0.030$ and $0.035$ (02 Nov 2004)	145
5.6	Comparison of Water Level for Manning's $n = 0.030$ (20 Sept 1991)	147
5.7	Comparison of Water Level for Manning's $n = 0.030$ (11 Jan 2005)	148
5.8	Comparison of Water Level for Manning's $n = 0.030$ (8 Mac 2006)	149

## LIST OF FIGURES

	Page
1.1 Topographical Map of Sungai Kulim Catchment	3
1.2 More Developed Part of the Catchment in the Lower Reach of the Sungai Kulim (green is forested and purple is developed)	4
2.1 Study Sites at Sungai Kinta Catchment	9
2.2 Morphological View of Sungai Kinta Catchment Study Sites	9
2.3 Bed Load Rating Curves for Sungai Kinta Catchment (Ab. Ghani et al., 2003)	11
2.4 Total Load Rating Curve for Sungai Kinta Catchment (Ab. Ghani et al., 2003)	11
2.5 Comparison of Computed Bed Load Transport Rate between Seven-Point Measurement Method and Three-Point Measurement Method (Ab. Ghani et al., 2003)	12
2.6 Evaluation of Manning's Equations using Equations 2.1 to 2.6 (Abdul Ghaffar, 2003)	15
2.7 Development of Equation 2.7 to determine the Value of $n$ based on $y_0/d_{50}$ (Abdul Ghaffar, 2003)	16
2.8 Development of Equation 2.8 to determine the value of $n$ based on $R/d_{50}$ (Abdul Ghaffar, 2003)	16
2.9 Study Sites at Sungai Langat Catchment	18
2.10 Bed Load Rating Curves for Sungai Langat Catchment (Ariffin, 2004)	20
2.11 Total Load Rating Curves for Sungai Langat Catchment (Ariffin, 2004)	20
2.12 Study Sites along Nile River, Egypt (Abdel-Fattah et al., 2004)	21
2.13 Sketch of Measuring Technique (Abdel-Fattah et al., 2004)	22
2.14 Layout of Measurement Stations and Locations (Abdel-Fattah et al., 2004)	23
2.15 Lower San Dieguito River under Existing Conditions	33
2.16 Hydrograph for 1993 Floods (Chang et al., 2002)	34
2.17 Simulated Spatial Variations in Sediment Delivery during 1993 Floods (Chang et al., 2002)	34
2.18 Simulated and Measured Changes (Chang et al., 2002)	35
2.19 Flood Hydrograph (Chang et al., 2002)	36

2.20	Simulated Changes In Water-Surface and Channel Bed Profiles during 100-Year Flood Under Existing Conditions (Chang et al., 2002)	37
2.21	Simulated Sample Cross-Sectional Changes during 100-year Flood (Chang et al., 2002)	37
2.22	Spatial Variations in Sediment Delivery in 100-year Time Span (Chang et al., 2002)	38
2.23	Spatial Variation of Sediment Delivery during the 1972-1997 Flood Series (Chang, 2004)	39
2.24	Water Surface and Channel Bed Profile Changes during Flood Series (Chang, 2004)	40
2.25	Spatial and Time Variations of Sediment Size during the 25-year Flood Series (Chang, 2004)	40
2.26	Time and Spatial Variation of Sediment Delivery during the 50-Year Flood Series for Armored Bed (Chang, 2004)	41
2.27	Time and Spatial Variations of Median Grain Size during the 50 Year Flood Series for Armored Bed (Chang, 2004)	42
2.28	Water Surface and Channel Bed Profile Changes during the 50 Year Flood Series for Armored Bed (Chang, 2004)	43
2.29	Cross Sections Showing Lateral Migration (Chang, 2004)	43
2.30	Representation of Processes Simulated in HEC6T (Thomas, 2003)	44
2.31	Comparison of Model Cumulative Scour for a High, Low and Optimal Estimate in Comparison with Observed Cumulative Scour (Canfield et al., 2005)	45
2.32	Comparison of Model Cumulative Scour, Observed Cumulative Scour and Channel Slope (Canfield et al., 2005)	46
2.33	Flowchart of Computational Steps in SDAR Model (Bahadori et al., 2006)	47
2.34	Simulated Surface Profiles for Moveable Bed Condition (Upper San Diego River) (Bahadori et al., 2006)	49
2.35	Predicted Bed Elevation Variations (Zumbro River, 54-day flow period) (Bahadori et al., 2006)	49
2.36	Predicted bed elevation variations (Upper San Diego River, 20-Hr flood) (Bahadori et al., 2006)	49
2.37	Predicted and Observed Final Bed (Mississippi River, 120-day flow) (Bahadori et al., 2006)	50
2.38	Annual Sediment Deposition in Danjiangkou Reservoir (Vieira & Wu, 2002)	51
2.39	Longitudinal Distribution of Sediment Deposition in Danjiangkou Reservoir (Vieira & Wu, 2002)	52
2.40	Measured vs. Calculated Flow Discharges in Pa-Chang River, at Jun-Hui Bridge (1995-1998) (Vieira and Wu, 2002)	53

2.41	Calculated Channel Degradation in Pa-Chang River (Vieira & Wu, 2002)	54
3.1	Delineated Sungai Kulim Catchment	57
3.2	Sungai Kulim Catchment and Subcatchment (DID, 1996)	58
3.3	General Landuse at Kulim District (MDK, 1993)	59
3.4	Existing Landuse for Sungai Kulim Catchment (DID, 1996)	60
3.5	Future Landuse for Sungai Kulim Catchment (DID, 1996)	60
3.6	Photograph of Historical Flood at Sungai Kulim Catchment (After DID Kulim/Bandar Baharu)	62
3.7	Flooding Extent Map (DID, 1996)	63
3.8	2003 Flood at Sungai Kulim Catchment (After DID Kulim/Bandar Baharu)	64
3.9	2003 Flood (DID, 2003)	65
3.10	Partial Blockages of Bridges	66
3.11	Siltation at Study Area	67
3.12	Sedimentation Problem at Sungai Kulim Catchment Construction Site (After DID Kulim/Bandar Baharu)	68
3.13	Sand Mining Activities at Sungai Kulim	68
3.14	Existing Sungai Kulim Cross Section @ CH 14390 (After DID Kulim/Bandar Baharu)	70
3.15	Map of Rainfall and Streamflow Stations (DID, 1996)	71
3.16	Ara Kuda Streamflow Station (5405421)	73
3.17	Designated Critical Levels at a Flood Warning Station (After DID Hydrology Division)	74
3.18	Discharge Hydrograph for Year 1963, 1998, 2000, 2001 and 2003	74
3.19	Water Level Chart for Year 1963, 1998, 2000, 2001 and 2003	75
3.20	Stage-Discharge Relationship at Ara Kuda (CH 0)	76
3.21	Flood Frequency Analyses Using Difference Type of Distribution	78
3.22	Field Measurement at Two Selected Cross Sections	79
3.23	Electromagnetic Current Meter	80
3.24	Van Veen Grab Sampler	81
3.25	Bed Material Measuring Points	81

3.26	Hand Held Helley-Smith Sampler	82
3.27	DH-48 Sampler	82
3.28	Suspended Load Measuring Points	83
3.29	Water Surface and Bed Level Measurement	83
3.30	Water Surface and Bed Level Measurement at the Selected Cross Sections	84
3.31	Sieve Analysis at Laboratory	85
3.32	Filtration Method at Laboratory	86
4.1	Bed Material Characteristic along Sungai Kulim	89
4.2	Particle Size Distribution of Bed Material Samples	89
4.3	Example of Sediment Size Distribution along Sungai Kulim	90
4.4	Sections for Computing Bed Load Transport Rate Using the Seven-Point Measurement Method	92
4.5	Summary of Computed Bed Load and Sediment Characteristic at CH 14390 (06 Jan 2006)	94
4.6	Summary of Computed Bed Load and Sediment Characteristic at CH 3014 (19 September 2006)	95
4.7	Sections for Computing Bed Load Transport Rate Using Three-Point Measurement Method	96
4.8	Comparison of Computed Bed Load Transport Rate between Seven-Point Measurement Method and Three-Point Measurement Method	96
4.9	Overall Agreement between the Two Measurement Techniques	97
4.10	Bed Load Rating Curves (Seven-Point Measurement Method) for Sungai Kulim	100
4.11	Suspended Load Rating Curves for Sungai Kulim	101
4.12	Total Load Rating Curves for Sungai Kulim	101
4.13	Cross Section Changes at Sungai Kulim	102
4.14	Evaluation of Manning's Equations using Equations 2.1 to 2.8	104
4.15	Flow Rating Curves for Sungai Kulim Catchment	107
4.16	Development of Equation 4.3 to determine the Value of Manning $n$ based on $y_o/d_{50}$	108
4.17	Development of Equation 4.4 to determine the Value of Manning $n$ based on $R/d_{50}$	108

4.18	Evaluation of Manning $n$ Equations using Equations 4.3	111
4.19	Evaluation of Manning $n$ Equations using Equations 4.4	111
4.20	Sediment Transport Assessment Using Bed Load Equations	114
4.21	Sediment Transport Assessment Using Total Load Equations	115
4.22	Evaluation of Sediment Transport Equations for Sungai Kulim	116
5.1	Study Reach for FLUVIAL-12 Modeling	121
5.2	Existing Survey Plan for Sungai Kulim (After DID Kulim/Bandar Baharu)	122
5.3	Existing Survey Cross Section for Sungai Kulim (After DID Kulim/Bandar Baharu)	123
5.4	Input Hydrograph for Year 1991	124
5.5	Input Hydrograph for Year 1991 to June 1993, 1997 to June 2006	124
5.6	Rating Curve for Sungai Kulim at CH 0 for Year 2002	125
5.7	Flood Rating Curve at CH 0	125
5.8	Initial Bed Material Size Distributions	126
5.9	FLUVIAL-12 Simulation	128
5.10	An Example of FLUVIAL-12 Output	129
5.11	Comparison of Water Surface (W.S.) Profile using Difference Value of Roughness Coefficient (Rigid Boundary)	131
5.12	Results of Sensitivity Analysis Using Graf Equation	132
5.13	Results of Sensitivity Analysis Using Yang Equation	133
5.14	Results of Sensitivity Analysis Using Engelund-Hansen Equation	133
5.15	Results of Sensitivity Analysis Using Parker Equation	134
5.16	Results of Sensitivity Analysis Using Ackers-White Equation	135
5.17	Results of Sensitivity Analysis Using Meyer-Peter Muller Equation	135
5.18	Results of Sensitivity Analysis Using Singer-Dunne Equation	136
5.19	Sensitivity Analysis Using Different Sediment Transport Equations	137
5.20	Simulation Changes in Water Surface and Channel-Bed Profile for the Curvature Sensitivity Analysis (Yang Equation)	139
5.21	Number Cross Section in Sensitivity Analysis (Yang Equation)	140



5.22	Comparison of Methods for Predicting Sediment Concentrations (Brownlie, 1981)	142
5.23	Comparison of Water Level for Manning's $n = 0.025, 0.030$ and $0.035$ (13 Sept 1991)	143
5.24	Comparison of Water Level for Manning's $n = 0.025, 0.030$ and $0.035$ (18 Sept 1991)	144
5.25	Comparison of Water Level and Bed Profile for Manning's $n = 0.025, 0.030$ and $0.035$ (02 Nov 2004)	146
5.26	Comparison of Water Level for Manning's $n = 0.030$ (20 Sept 1991)	148
5.27	Comparison of Water Level for Manning's $n = 0.030$ (11 Jan 2005)	148
5.28	Comparison of Water Level for Manning's $n = 0.030$ (8 Mac 2006)	149
5.29	Hydrograph of the October 2003 Flood	150
5.30	Spatial Variations of the Sediment Delivery during the October 2003 Flood	151
5.31	Water surface and Bed Profile Changes during October 2003 Flood	152
5.32	Spatial Variations of the Median Grain Size before and after October 2003 Flood	152
5.33	Modeled Cross Section Changes before and after October 2003 Flood	153
5.34	Design Hydrograph for 2010 Landuse (DID, 1996)	154
5.35	Spatial Variations of the Sediment Delivery using the Design Hydrograph (18 Hours Rainfall Duration)	155
5.36	Water Surface and Bed Profile Changes based on Design Flood Hydrograph	156
5.37	Spatial Variations of the Median Grain Size before and after 18 Hours Rainfall Event using Design Flood Hydrograph	156
5.38	Modeled Cross Section Changes based on Design Flood Hydrograph	157
5.39	Spatial Variations of the Predicted Sediment Delivery based on Long-Term Simulation	158
5.40	Water Surface and Bed Profile Changes based on Long-Term Simulation	159
5.41	Spatial Variations of the Predicted Median Grain Size for Year 2006 and 2016	160
5.42	Predicted Cross Section Changes for Year 2006 and 2016	160

## LIST OF ABBREVIATION

AMSL	=	Above Mean Sea Level
ARI	=	Average recurrence interval
CH	=	Chainage
DID	=	Department of Irrigation and Drainage
DOE	=	Department of Environment
DWR	=	Department of Water Resources
EDM	=	Electronic Distance Meter
FISRWG	=	Federal Interagency Stream Restoration Working Group
GSTARS	=	Generalized Stream Tubemodel for Alluvial River Simulation
HEC	=	Hydrologic Engineering Centre
Hr	=	Hour
LB	=	Left Bank
MDK	=	Majlis Daerah Kulim
RB	=	Right Bank
RL	=	Reduce Level
SAM	=	Sediment Analysis Model
SDAR	=	Scour and Deposition Model of Alluvial Rivers
USACE	=	United States Army Corps of Engineers
USGS	=	United States Geological Survey
WL	=	Water Level
WS	=	Water Surface

## LIST OF SYMBOLS

Symbol	Definition
A	Flow area (m <sup>2</sup> )
b	Section width of the channel (m)
B	River width
C <sub>m</sub>	Suspended Solid Concentration
<i>C<sub>u</sub></i>	Uniformity coefficient
C <sub>v</sub>	Sediment Concentration in ppm by volume
d <sub>50</sub> , d , D <sub>50</sub>	Sediment diameter where 50% of bed material is finer
d <sub>i</sub>	Size of particle intermediate axis for which i% of sample of bed material is finer
FR	Froude Number
DT	Size of the time step
DZ	Change in elevation during the current time step (m)
g <sub>b</sub>	Sectional bed load transport rate
<i>Gr</i>	Gradation coefficient
h <sub>s</sub>	Width of Helley-Smith sampler nozzle (m)
<i>n</i> , N	Manning's roughness coefficient
P	Wetted perimeter of cross section of flow (m)
Q	Flow discharge (m <sup>3</sup> /s)
T <sub>b</sub>	Bed load transport rate (kg/s)
T <sub>j</sub>	Total bed material load transport rate (kg/s)
T <sub>s</sub>	Suspended load transport rate (kg/s)
T <sub>t</sub>	Suspended load discharge (m <sup>3</sup> /s)
QS	Bed material discharge for all size fractions (m <sup>3</sup> /s)
R	Hydraulic radius
R <sup>2</sup>	Correlation coefficient

S	Channel slope
$S_0$	Water-surface slope
T	Time the bed load sampler on the bed
TDZ	Total or accumulated change in elevation (m)
V	Average flow velocity
$\overline{w_i}$	Mean weighted bed load sample of the vertical for $n$ section
$y_0, y$	Flow depth
Y	Horizontal coordinate (elevation) of a point on channel boundary at a cross- section (m)
Z	Vertical coordinate (elevation) of a point on channel boundary at a cross- section (m)
$\sigma_g$	Standard deviation of bed material

# **PENGANGKUTAN ENDAPAN DI SUNGAI KULIM, KEDAH**

## **ABSTRAK**

Kesan pembangunan yang mendadak telah membawa impak kepada hidrologi dan geomorfologi sesuatu kawasan tadahan. Pembangunan yang mendadak ini terutamanya di kawasan tadahan sungai akan meningkatkan hasil endapan dan seterusnya bukan sahaja menjejaskan morfologi sungai, kestabilan sungai dan mengakibatkan kerosakan yang serius pada struktur hidraulik sepanjang saluran sungai yang menyebabkan banjir di kawasan bandar. Dengan itu, kestabilan saluran sungai berdasarkan pembangunan yang sedia ada dan masa hadapan perlu diramal dan dinilai. Kajian ini dijalankan dengan menggunakan data yang dicerap sehingga tahun 2006 untuk menilai pengangkutan endapan di Sungai Kulim, Kedah, Malaysia. Kajian ini cuba memberi gambaran keseluruhan tentang perubahan saluran dan fenomena pengangkutan endapan di Sungai Kulim. Sejumlah 24 sampel bahan dasar telah dicerap dari empat lokasi (CH 20000, CH 14390, CH 3014 dan CH 0) dan 14 data hidraulik serta endapan termasuk kadar alir, beban endapan dasar, beban endapan terampai dan jumlah beban endapan telah dicerap dari dua lokasi (CH 14390 dan CH 3014) dalam tempoh 2004 ke 2006. Data tersebut digunakan untuk menjalankan analisis dan penilaian terhadap persamaan Manning dan persamaan pengangkutan endapan. Dua persamaan Manning baru iaitu Persamaan 4.3 dan 4.4 dengan pekali sekaitan,  $R^2 = 0.86$  telah dibangunkan untuk diaplikasikan di sungai saiz sederhana di Malaysia. Keputusan penilaian persamaan jumlahan pengangkutan endapan yang sedia ada bagi dua lokasi di Sungai Kulim menunjukkan Persamaan Engelund & Hansen memberikan keputusan yang paling baik untuk saluran pasir dan mencapai peratusan data yang mempunyai nisbah kelainan antara 0.5 ke 2.0 sebanyak 33.33% di CH 14390 dan 62.50% di CH 3014. Model FLUVIAL-12, merupakan model perbatas-hakis yang telah dipilih dalam kajian ini untuk meramalkan perubahan profil dasar saluran, kelebaran dan topografi saluran. Persamaan

Engelund-Hansen dan pekali kekasaran Manning,  $n = 0.030$  telah dipilih semasa perbandingan profil paras air dan dasar dilakukan dalam proses penentukuran dan penyelakuan model. Perbandingan antara data geometri saluran tinjauan dengan pengukuran di tapak dari Oktober 2004 hingga November 2006 telah menunjukkan terdapat perubahan terhadap keratan rentas setelah beberapa banjir berlaku dari 1991 hingga 2003. Ramalan paras dasar yang hampir dengan paras dasar cerapan semasa 2004 ke 2006 oleh FLUVIAL-12 telah mengesahkan hakisan berlaku di sepanjang 14.4 km saluran sungai. Keputusan model simulasi bagi penyelakuan keadaan sedia ada, masa hadapan dan jangka panjang menunjukkan saiz endapan dan geometri saluran Sungai Kulim mempunyai perubahan yang ketara. Walau bagaimanapun, keputusan model menunjukkan perubahan terhadap keratan rentas adalah terhad dan hakisan di sepanjang saluran akan berkurangan pada masa depan. Dengan ini, Sungai Kulim diramal stabil pada kebanyakan lokasi.

# SEDIMENT TRANSPORT IN SUNGAI KULIM, KEDAH

## ABSTRACT

Effect of rapid urbanization has accelerated the impact on the catchment hydrology and geomorphology. Such rapid development which takes place in river catchment areas will result in higher sediment yield and it will not only affects river morphology, but also river channel stability, causing serious damages to hydraulic structures along the river and also becoming the main cause for serious flooding in urban areas. Therefore, it is necessary to predict and evaluate the river channel stability due to the existing and future developments. This study was carried out at Sungai Kulim in Kedah state, Malaysia, by means of evaluation on sediment transport using recently observed data up to year 2006. The present study attempts to give an overview of the channel changes and sediment transport phenomena in Sungai Kulim. A total of 24 samples of bed materials were collected from four locations (CH 20000, CH 14390, CH 3014 and CH 0), and 14 river hydraulics and sediment transport data sets including discharge, bed load, suspended load and total load were collected from two locations (CH 14390 and CH 3014) from 2004 to 2006. The data were used to analyze and evaluate existing Manning equations and sediment transport equations. Attempts were also made to derive new Manning equations (Equations 4.3 and 4.4) with a correlation coefficient,  $R^2 = 0.86$  for application to the moderate-size channels in Malaysia. The results of evaluation for total load equations at the two locations along Sungai Kulim show that Engelund & Hansen equation gave the best prediction for sand bed stream and yielded highest percentage of data with discrepancy ratio in between 0.5 and 2.0 (33.33% at CH 14390 and 62.50% at CH 3014). An erodible-boundary model, FLUVIAL-12 which simulates inter-related changes in channel-bed profile, width variation and changes in bed topography was selected for this study. Engelund-Hansen equation and roughness coefficient,  $n = 0.030$  were selected for the model which was calibrated and validated for water surface profile and bed elevation. The

comparison of the surveyed river geometry data in September 1991 and field measurements from October 2004 to November 2006 shows that there has been a change in cross section after several flood occurrences from 1991 to 2003. The predicted bed levels by FLUVIAL-12 were almost similar to the observed bed level from 2004 to 2006, this confirmed that channel bed degradation occurred along the 14.4 km study reach. The model simulation results for existing conditions, future conditions and long-term modeling show that the sediment size and channel geometry in Sungai Kulim changed significantly. However, modeled results show that future changes in cross sectional geometry will be limited and erosion along the reach will slow down from 2006 to 2016, thus Sungai Kulim was predicted to be stable at most locations.



# CHAPTER 1

## INTRODUCTION

### 1.1 Background

River is a dynamic system governed by hydraulic and sediment transport processes. Over time, the river responds by changing in channel cross section, increased or decreased sediment carrying capacity, erosion and deposition along the channel, which affect bank stability and eventually cause morphology changes. Rapid urbanization has accelerated impact on the catchment hydrology and geomorphology. Developments in river catchment areas will cause dramatic increase in the surface runoff and resulting in higher sediment delivery. When this happens, it will not only affect river morphology, but also cause instability in the river channel and hence inflicting serious damage to hydraulic structures along the river and reducing channel capacity to convey the flood water to downstream. Therefore, it is necessary to evaluate and predict the river channel stability for the purpose of river rehabilitation due to the existing and future developments in the river catchment.

This study was carried out at Sungai Kulim, a natural stream in Kedah, Malaysia. Frequent floods that occur in Sungai Kulim catchment have caused extensive damage and inconvenience to the community, especially the flood event in October 2003, which is an event of about 100 year ARI. Hence, previous studies for Sungai Kulim (DID, 1996; Yahaya, 1999; Lee, 2001; Ibrahim, 2002; Koey, 2004) were conducted to determine the river behaviors and the effectiveness of the flood mitigation projects due to rapid urbanization. The data available from these studies, including river survey geometry data, sediment data and hydrology data were up to year 1999 and limited. These data, together with those from the present study (up to 2006) will be evaluated and used to predict river stability for future development. This will allow evaluation of

river stability over a 16-year period by considering the effect of changes in cross section and sediment load.

## **1.2 Objectives**

The primary objectives of the study are as follow:

1. To evaluate Sungai Kulim sediment transporting capability due to rapid urbanization
2. To examine river stability due to changes made by nature or human
3. To determine effect of flooding due to rapid urbanization

## **1.3 Study Site**

This study was carried out on Sungai Kulim in Kedah state, Malaysia, by analyzing and evaluating sediment transport using newly observed data up to 2006. This study would give an overview of the channel changes and sediment transport phenomena, which cause river bank and bed stability problems in Sungai Kulim.

Sungai Kulim catchment (Figure 1.1) is located in the southern part of the state of Kedah and in the northwestern corner of Peninsular Malaysia. At the headwaters, Sungai Kulim catchment is hilly and densely forested. Sungai Kulim originates from the western slopes of Gunung Bongsu Range and flows in a north-westerly direction. The river slopes are steep and the channel elevations drop from 500 m to 20 m above mean sea level (AMSL) over a distance of 9 km. The central area of the catchment is undulating with elevations ranging from 100 m down to 18 m AMSL.



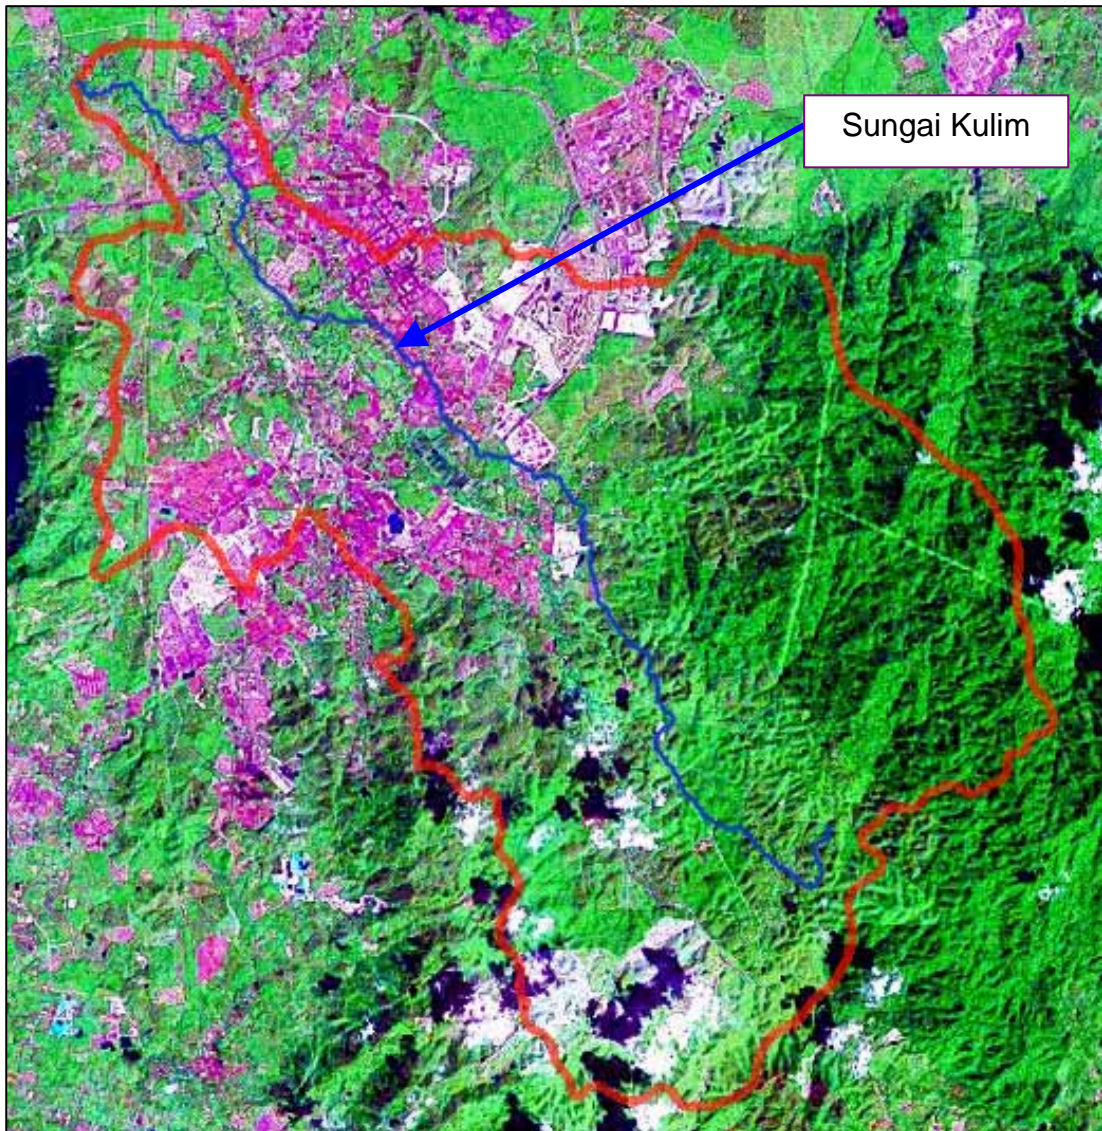


Figure 1.2: Areal Photo of Sungai Kulim Catchment

#### 1.4 Scope of Research

The scope and limitations of the research are as follow:

- a) The extraction of hydraulic and sediment data were focused to the Sungai Kulim (CH 14390 to CH 0) in Kedah State.
- b) Evaluation of existing Manning's  $n$  equations were limited to most commonly used equations namely Strickler (1923), Meyer-Peter & Muller (1948), Lane & Carlson (1953), Limerinos (1970), Bray (1979), Brownlie (1983) and Bruschin (1985) equations. The evaluation of Abdul Ghaffar (2003)'s equation based on Sungai Kinta catchment, Malaysia has also been carried out in this study.

- c) Evaluation of existing sediment transport equations were limited to most commonly used equations namely Einstein bed load function (Einstein, 1942, 1950), Einstein-Brown's equation (Brown, 1950), Meyer-Peter-Muller's equation (1948), Shields' equation (1936), Duboys' equation (1879), Yang's equation (1972), Engelund-Hansen's equation (1967), Ackers-White's equation (1973) and Graf's equation (1971). Besides that, the evaluation of Shanker's equation which developed by Sinnakaudan (2003) based on Malaysian rivers has been carried out in this study.
- d) One dimension steady flow hydraulic model (FLUVIAL-12) was used to simulate the sediment transport and flow condition in Sungai Kulim.
- e) River hydraulic data used for sediment transport modeling using FLUVIAL-12 were limited to the data obtained from 1991 to 1993 June and 1997 to 2006 June.

## **1.5 Structure of Thesis**

This thesis is divided into six (6) chapters. Chapter 1 briefly introduces the research, including objectives and scope of works for the study. Chapter 2 contains literature review of relevant studies regarding to data collection, sediment modeling and river rehabilitation. Chapter 3 describes the research methodology which was used in this research and site description, including the climate, hydrology, and geology of Sungai Kulim. The river hydrology and hydraulic data, field measurements and laboratory test are also included in this chapter. In Chapter 4, the result of sediment analyses and summary are described. Chapter 5 presents the sediment transport modeling using FLUVIAL-12 and Chapter 6 contains conclusions and recommendations for this research.

Appendix A provides the comparison of sediment size distribution for a total of 24 data at four locations, while Appendix B shows the computation of bed load at CH 14390 and CH 3014 using seven-point measurement method. The summary of the computed bed load and sediment characteristic at the two locations along Sungai Kulim is shown in Appendix C. Appendix D and Appendix E provide the computation of bed load using three-point measurement method and computed suspended load at CH 14390 and CH 3014. The summary of measured and computed  $n$  from the Equations 2.1 to 2.8, Equations 4.3 and 4.4 for representative data for Sungai Kulim, Sungai Kinta and Sungai Langat are given in Appendix F. Appendix G is a sample of the FLUVIAL-12 output.

## **CHAPTER 2**

### **LITERATURE REVIEW**

#### **2.1 Sediment Transport**

An alluvial river frequently adjusts its cross-section, longitudinal profile, course of flow and pattern through the processes of sediment transport, scour and deposition. In order to sustain cultural and economic developments along an alluvial river, it is essential to understand the principles of sediment transport for application to the solution of engineering and environmental problems associated with natural events and human activities. Sediment can be defined as fragmented material which is formed by physical and chemical weathering of rocks. The transport of sediment through a river system consists of multiple erosional and depositional cycles. Many sediment particles are intermittently stored in alluvial deposits along the channel or floodplain, and ultimately re-entrained via bank and bed erosion. Total sediment loads consist of suspended load (the fine-grained fraction transported in the water) and bed load (the coarse-grained fraction transported along the channel bed). The transport of sediment through the stream depends on the sediment supply (size and quantity) and the ability of the stream to transport the sediment.

#### **2.2 Sediment Data Collection and Analysis**

River surveys, flow measurement and field data collection provide the basic physical information such as sediment characteristics, discharge, water surface slope, etc., which is needed for the planning and design of river engineering. For each particular location, river surveys, flow measurement and field data are collected using appropriate equipment and instrument. Various types of sampler, measuring and procedures are used to obtain such information in Malaysia as well as other countries around the world. The sediment data collection and analysis are discussed in the following sections.

### **2.2.1 Sungai Kinta Catchment**

A total of 122 sediment data were obtained from May 2000 until October 2002 at Sungai Kinta Catchment (Figure 2.1) in the river sediment collection and analysis project (Ab. Ghani et al., 2003). Data collection including discharge, water-surface width, flow depth, water-surface slope, bed load, suspended load and bed material has been carried out at four rivers, namely Sungai Kinta, Sungai Pari, Sungai Raia and Sungai Kampar by referring to Hydrological Procedure (DID, 1976; DID, 1977) and recent manuals (Yuqian, 1989; USACE 1995, Edwards & Glysson, 1999; Lagasse et al., 2001; Richardson et al., 2001). Details of data collection and analysis are given in Ab. Ghani et al. (2003). Six study sites (Figures 2.1 and 2.2) were chosen based on the following criteria:

- (a) Natural reach (undeveloped upper or middle reach), which is less than 30% catchment development: Sungai Kampar @ KM 34 (Figure 2.2a).
- (b) Natural reach (Developed middle reach), which is more than 30% development: Sungai Raia @ Kampung Tanjung (Figure 2.2b) and Batu Gajah (Figure 2.2c).
- (c) Modified reach (Developed middle reach), which is more than 30% development: Sungai Kinta (Figure 2.2d), Sungai Pari @ Manjoi (Figure 2.2e) and Buntong (Figure 2f).

#### ***Range of Data***

Table 2.1 shows a summary of the data collected at the six study sites with respective range of discharge ( $Q$ ), water-surface width ( $B$ ), flow depth ( $y_o$ ), hydraulic radius ( $R$ ), water-surface slope ( $S_o$ ), mean sediment size ( $d_{50}$ ), aspect ratio ( $B/y_o$ ) bed load ( $T_b$ ), suspended load ( $T_s$ ) and total load ( $T_j$ ).



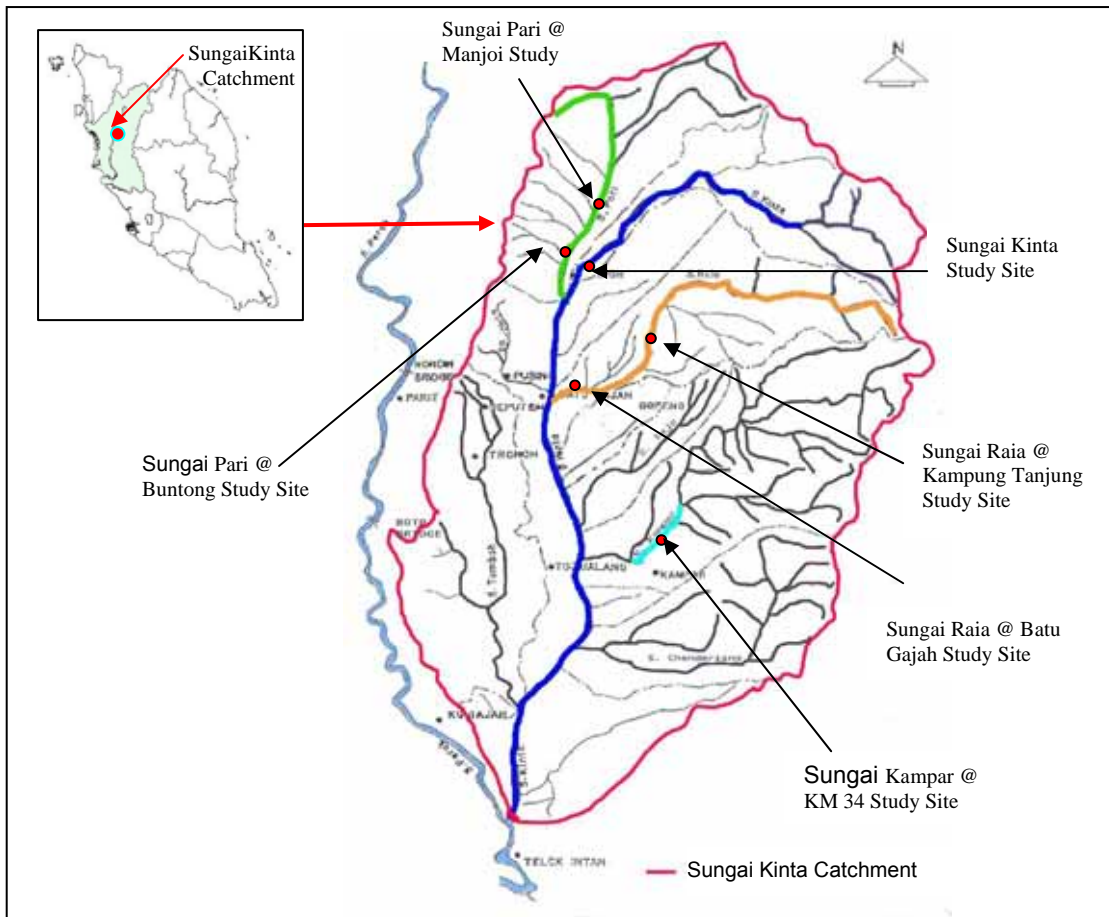


Figure 2.1: Study Sites at Sungai Kinta Catchment

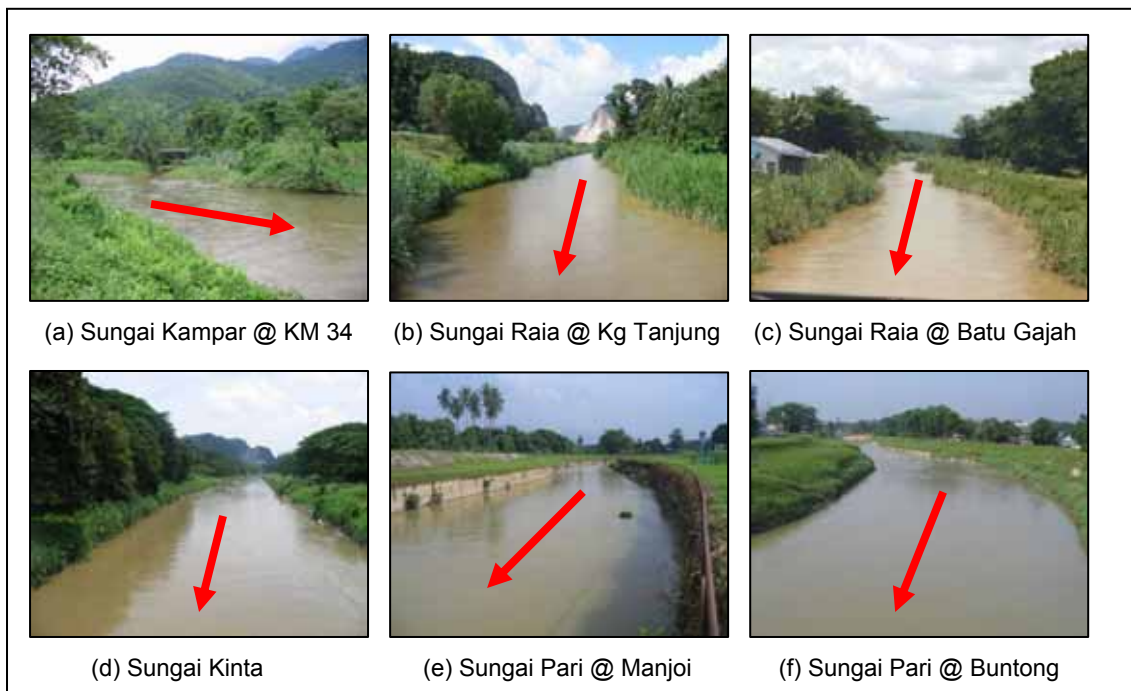


Figure 2.2: Morphological View of Sungai Kinta Catchment Study Sites

The mean sediment sizes for all sites showed that the study reaches are sand-bed stream with  $d_{50}$  range from 0.40 to 3.00 mm. The aspect ratios for the four rivers are between 11 and 107 indicating that they are moderate-size channels. The water-surface slopes of the study reaches were determined by taking measurements of water levels over a distance of 200 m along the cross section is located (FISRWG, 2001). For all the study sites, the water-surface slopes were found to be mild with ranges in between 0.001 and 0.004.

Table 2.1: Range of Field Data for Sungai Kinta Catchment (Ab. Ghani et al., 2003)

Study Site	Sungai Kampar @ KM 34	Sungai Raia @ Kampung Tanjung	Sungai Raia @ Batu Gajah	Sungai Kinta @ Ipoh	Sungai Pari @ Manjoi	Sungai Pari @ Buntong
No. of Sample	21	20	21	20	20	20
Discharge, Q (m <sup>3</sup> /s)	7.98 - 17.94	3.60 - 8.46	4.44 - 17.44	3.80 - 9.65	9.72 - 47.90	9.66 - 17.04
Water surface width, B (m)	20.2-21.1	22.2-25.6	17.3-20.8	24.6-28.0	20.3	19.3-19.5
Flow depth, $y_o$ (m)	0.55-1.28	0.24-0.49	0.41-1.76	0.35-0.57	0.69-1.87	0.68-0.89
Hydraulic radius, R (m)	0.52-1.14	0.23-0.47	0.39-1.51	0.31-0.55	0.65-1.77	0.63-0.81
Water surface slope, $S_o$	0.0010	0.0036	0.0017	0.0011	0.0011	0.0012
Mean sediment size, $d_{50}$ (mm)	0.85 - 1.10	0.60 - 1.60	0.50 - 0.85	0.40 - 1.00	1.70 - 3.00	0.85 - 1.20
$B/y_o$	17 - 38	46 - 107	12 - 45	48 - 86	11 - 29	22 - 29
Bed load, $T_b$ (kg/s)	0.40 - 1.25	0.20 - 1.82	0.25 - 1.37	0.02 - 1.21	0.40 - 0.80	0.35 - 0.79
Suspended load, $T_s$ (kg/s)	0.10 - 1.49	0.07 - 1.39	0.09 - 2.04	0.21 - 12.31	0.79 - 16.81	0.67 - 4.41
Total load, $T_j$ (kg/s)	0.57 - 2.47	0.65 - 2.11	0.47 - 2.69	0.23 - 12.82	1.25 - 17.62	1.03 - 4.89

### ***Sediment Transport Data Analysis***

The scatter plots of bed load transport against discharge and total load transport against discharge are shown in Figures 2.3 and 2.4. The observed flow range is between 3.60 m<sup>3</sup>/s to 47.90 m<sup>3</sup>/s, carrying total sediment load between 0.57 kg/s to 17.62 kg/s. The sediment ratings show that the points scatter widely, although the transport rate is sensitive to discharge. These scatter plots will be used to compare with the calculated sediment load by using existing sediment transport equations for the study sites.

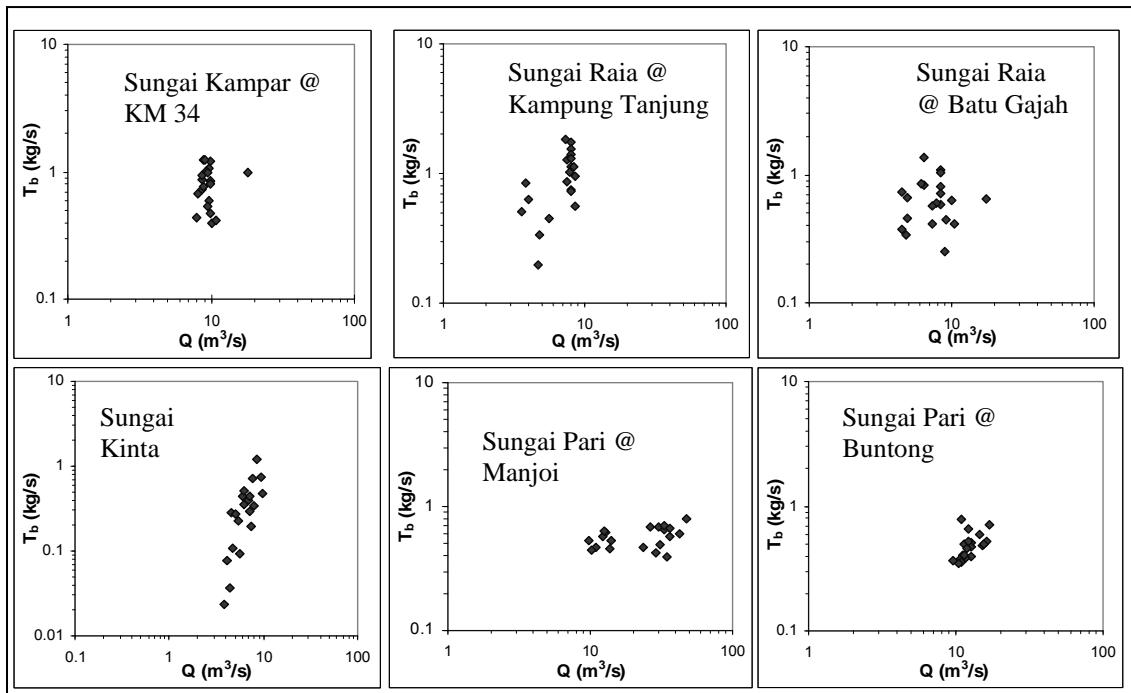


Figure 2.3: Bed Load Rating Curves for Sungai Kinta Catchment (Ab. Ghani et al., 2003)

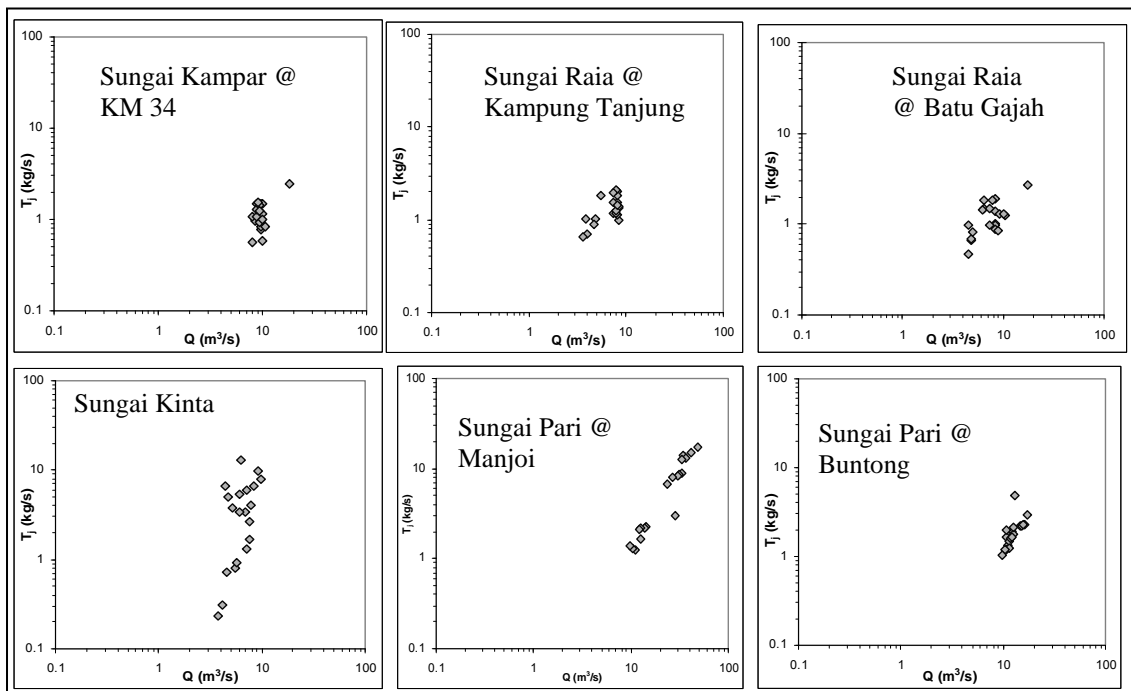


Figure 2.4: Total Load Rating Curve for Sungai Kinta Catchment (Ab. Ghani et al., 2003)

The additional calculation of bed load transport rate by using three-point measurement method (4 sections) has also been carried out (Ab. Ghani et al., 2003). Figure 2.5 shows comparison of bed load transport rate obtained using seven-point

measurement method (8 sections) and three-point measurement method (4 sections). The bed load transport rates are not much difference between the two methods. Therefore, the results suggested that bed load measurement in a small stream can be carried out using the three-point measurement method with advantages in terms of time, cost and man power.

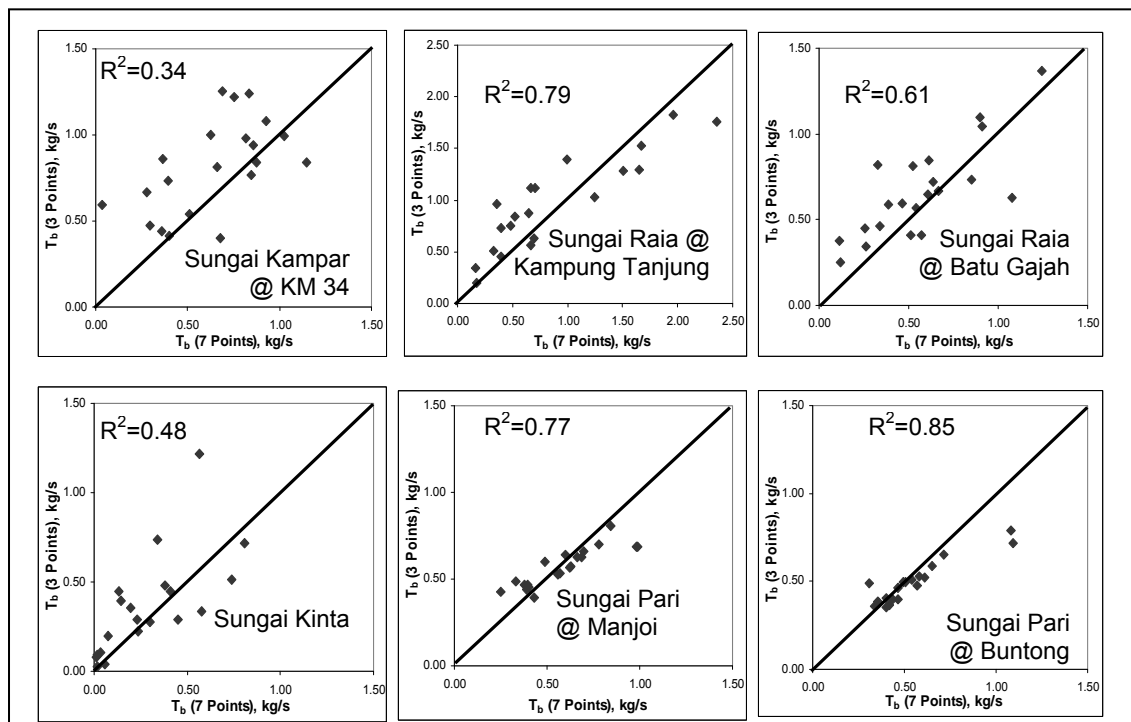


Figure 2.5: Comparison of Computed Bed Load Transport Rate between Seven-Point Measurement Method and Three-Point Measurement Method (Ab. Ghani et al., 2003)

### **Flow Resistance**

Research on determination of Manning  $n$  value at the Sungai Kinta catchment was started by Abdul Ghaffar (2003). Six Manning equations were chosen for evaluation and the equations can be categorized as follow:

Category 1: Equations based on bed sediment size ( $d_{50}$ )

$$\text{Strickler (1923): } n = \frac{1}{21.1} d_{50}^{1/6} \quad (2.1)$$

$$\text{Meyer-Peter \& Muller (1948): } n = \frac{1}{26} d_{90}^{1/6} \quad (2.2)$$

$$\text{Lane \& Carlson (1953): } n = \frac{1}{21.14} d_{75}^{1/6} \quad (2.3)$$

Category 2: Equations based on the ratio of flow depth ( $y_o$ ) or hydraulic radius (R) over sediment size

$$\text{Limerinos (1970): } n = \frac{0.113R^{1/6}}{0.35 + 2.0 \log_{10} \left( \frac{R}{d_{50}} \right)} \quad (2.4)$$

$$\text{Bray (1979): } n = \frac{0.113y_o^{1/6}}{1.09 + 2.2 \log_{10} \left( \frac{y_o}{d_{50}} \right)} \quad (2.5)$$

Category 3: Equations include water-surface slope ( $S_o$ ) besides bed sediment size and hydraulic radius or flow depth

$$\text{Bruschin (1985): } n = \frac{d_{50}^{1/6}}{12.38} \times \left( \frac{R}{d_{50}} \times S_o \right)^{1/7.3} \quad (2.6)$$

Category 1 was developed from data of large, wide rivers with gentle slopes (Rahmeyer, 2006) and bed material is the primary source of resistance. Limerinos (1970)'s equation was developed using 50 data from California rivers where  $d_{50}$  ranges from 6 mm to 253 mm. The river channels are relatively wide stream of simple trapezoidal shapes with inbank flow (Lang et al. 2004). Bray (1979)'s equation was calibrated against data from 67 gravel-bed reaches in Alberta, Canada with  $d_{50}$  range from 18 mm to 147 mm and channel width between 14 m to 546 m (Lang et al. 2004). Equation by Bruschin (1985) was based mainly on flume and sandy river data (Raudkivi, 1993).

The existing equations (Strickler, 1923; Meyer-Peter & Muller, 1948; Lane & Carlson 1953; Limerinos, 1970; Bray, 1979 and Bruschin, 1985) were evaluated for their suitability in predicting discharge for several streams along the Sungai Kinta catchment. However, the evaluation of the existing equations for the six study sites at Sungai Kinta catchment resulted in an unsatisfactory prediction of discharge, as shown in Figure 2.6 (Abdul Ghaffar, 2003).

Two new equations (Equations 2.7 and 2.8) were proposed by Abdul Ghaffar (2003) for determining Manning's  $n$  for rivers in Malaysia for moderate-size channels in Malaysia with a correlation coefficient  $R^2 = 0.61$ . Figures 2.7 and 2.8 plot Manning's  $n$  against both  $y_o/d_{50}$ , and  $R/d_{50}$ , respectively. These equations were evaluated for their suitability in predicting discharge for several streams along the Sungai Kinta catchment.

Abdul Ghaffar (2003): 
$$n = 2 \times 10^{-8} \left( \frac{y_o}{d_{50}} \right)^2 - 3 \times 10^{-5} \left( \frac{y_o}{d_{50}} \right) + 0.0511 \quad (2.7)$$

$$n = 3 \times 10^{-8} \left( \frac{R}{d_{50}} \right)^2 - 4 \times 10^{-5} \left( \frac{R}{d_{50}} \right) + 0.0537 \quad (2.8)$$

Table 2.2 gives a summary of discrepancy (ratio of computed discharge over measured discharge) by using Equations 2.7 and 2.8 for all the 122 data. The results show that all the computed discharges are within the 0.5 to 2.0 range of discrepancy ratio suggesting the viability of using these new equations for predicting discharge of the rivers with similar characteristics as studied (Table 2.1).

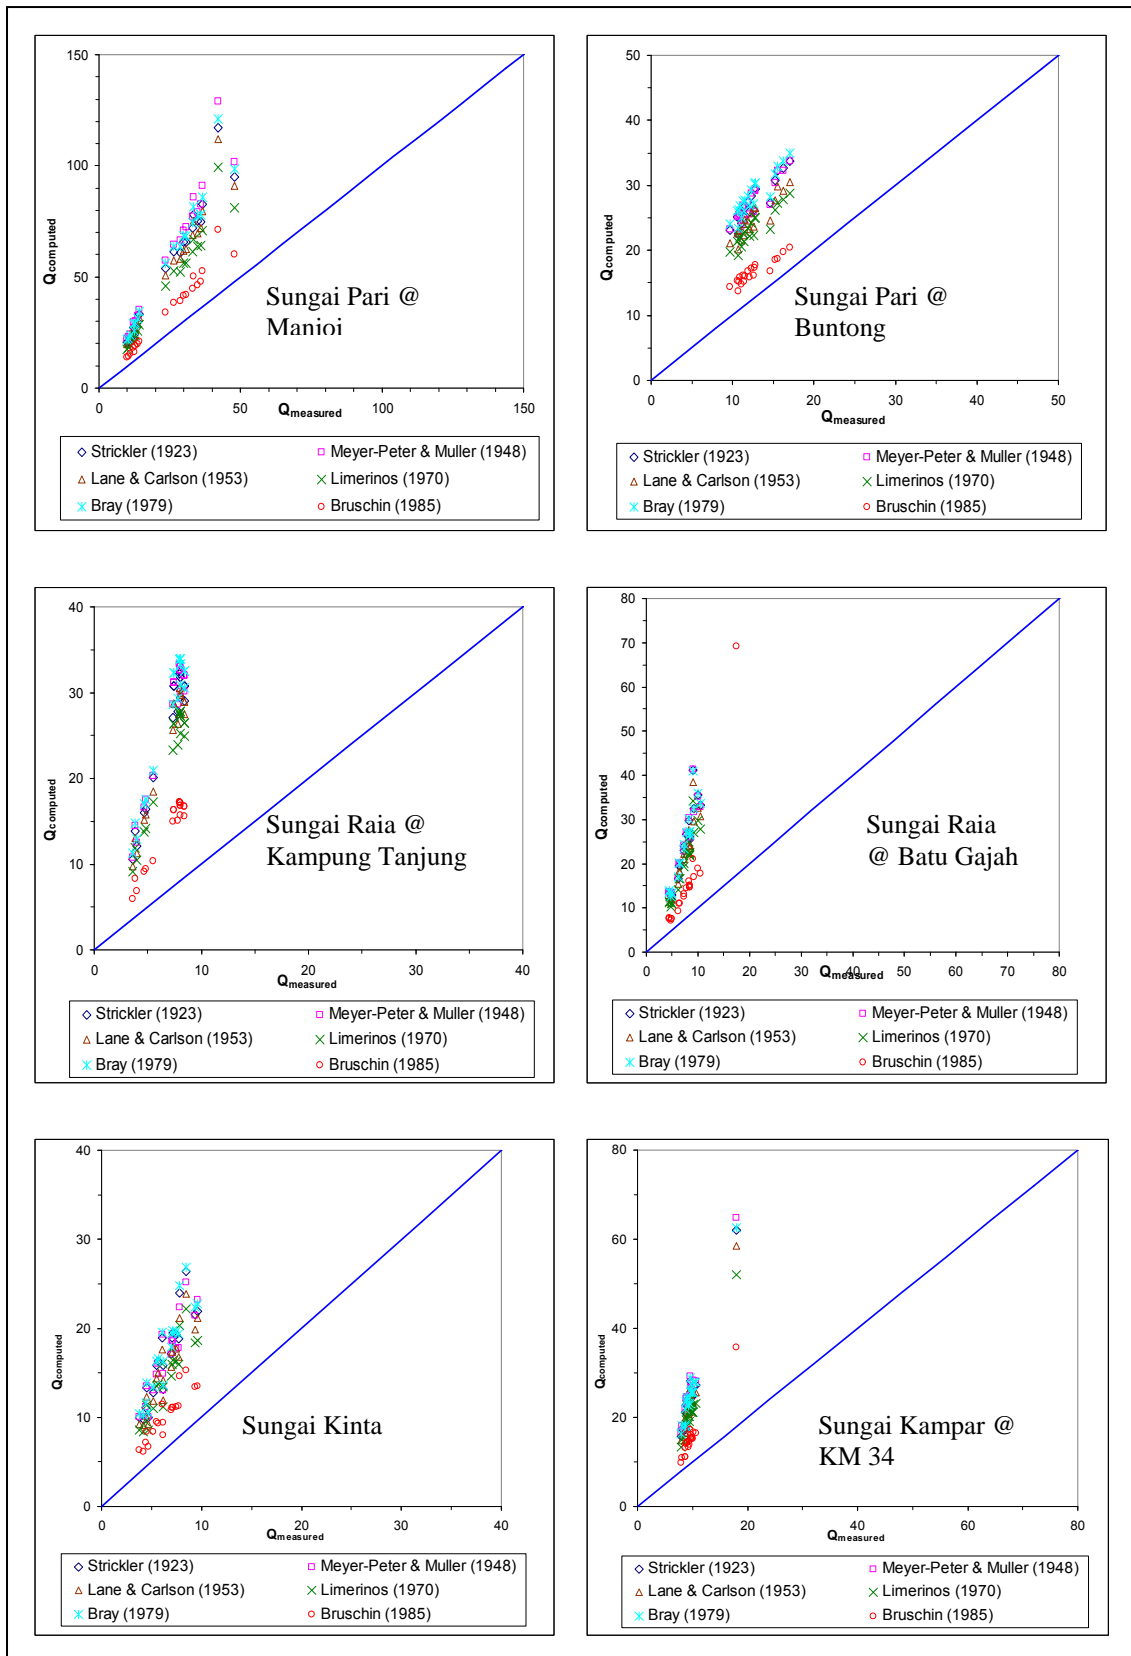


Figure 2.6: Evaluation of Manning's Equations using Equations 2.1 to 2.6 (Abdul Ghaffar, 2003)

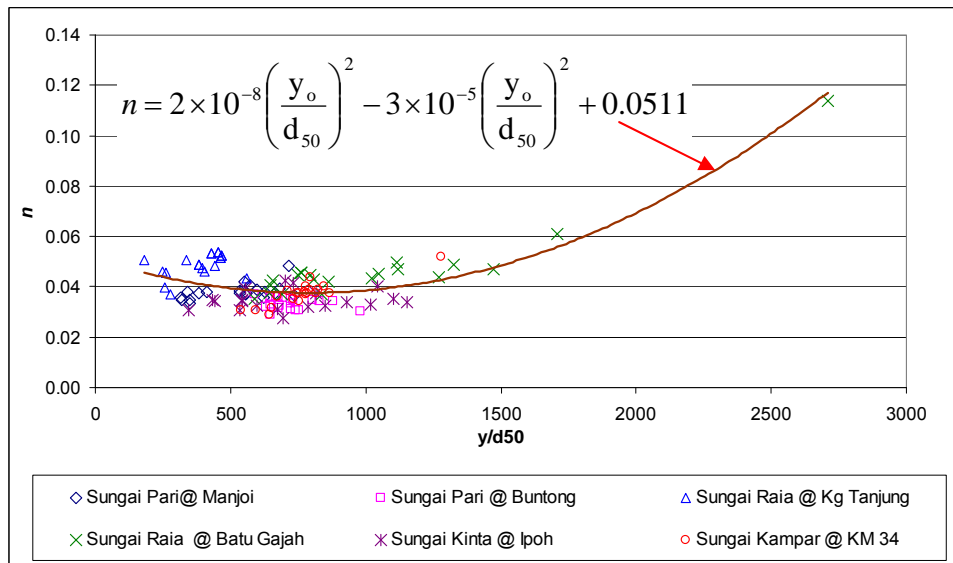


Figure 2.7: Development of Equation 2.7 to determine the Value of  $n$  based on  $y_0/d_{50}$  (Abdul Ghaffar, 2003)

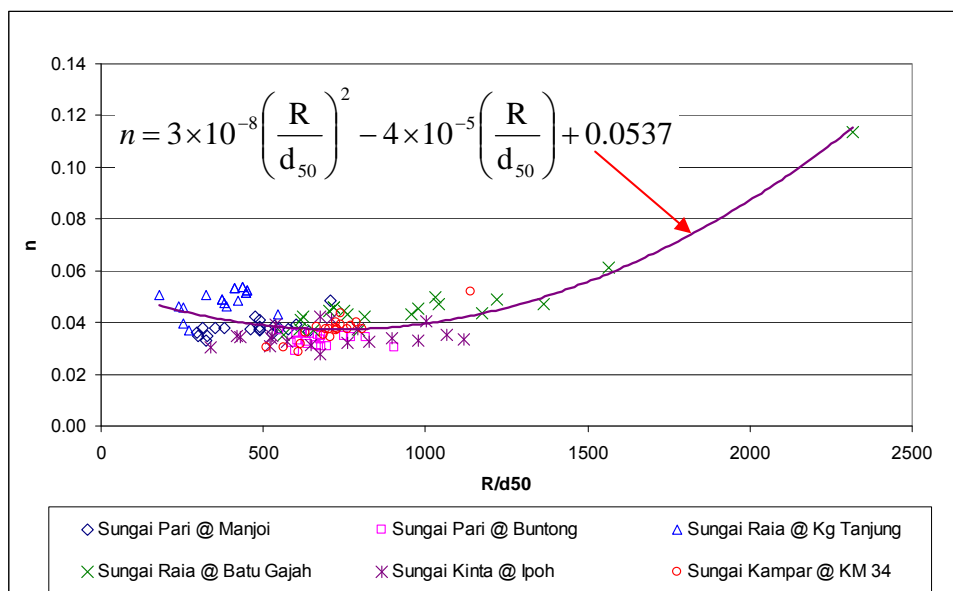


Figure 2.8: Development of Equation 2.8 to determine the value of  $n$  based on  $R/d_{50}$  (Abdul Ghaffar, 2003)

Table 2.2: Summary of Discrepancy Ratio using Equations 2.7 and 2.8 for Sungai Kinta Catchment (Abdul Ghaffar, 2003)

River	Study Site	Equation 2.7			Equation 2.8		
		Discrepancy Ratio			Discrepancy Ratio		
		0.5-2.0 (%)	0.75-1.50 (%)	Average	0.5-2.0 (%)	0.75-1.50 (%)	Average
Sungai Pari	Manjoi	100	100	0.92	100	100	0.91
	Buntong	100	90	0.84	100	90	0.82
Sungai Raia	K. Tanjung	100	100	1.32	100	100	1.31
	Bt. Gajah	100	100	1.03	100	100	1.00
Sungai Kinta	Ipoh	100	95	0.88	100	90	0.87
Sungai Kampar	KM 34	100	90.48	0.92	100	85.71	0.91



### **Sediment Transport Equation Assessment**

The analysis for a total of 122 set of data was also carried out by applying four sediment transport equations namely Yang's equation (1972), Engelund-Hansen's equation (1967), Ackers-White's equation (1973) and Graf's equation (1971). The performances of the equations were measured using the discrepancy ratio value, which is the ratio of the predicted load to measured load. A discrepancy ratio of 0.5 to 2.0 was used in the evaluation of sediment assessment. From the results of sediment transport assessment for total load (Table 2.3), it can be concluded that Yang and Engelund & Hansen equations gave the best performance to predict the sediment load, and it can be used to predict sediment transport rate for sand-bed rivers in Malaysia (Ab. Ghani et al., 2003).

Table 2.3: Summary of Sediment Transport Equation Assessment for Sungai Kinta Catchment (Ab. Ghani, 2003)

River	Study Site	Total of Data	Discrepancy Ratio (0.5 to 2.0)							
			Yang		Engelund & Hansen		Ackers & White		Graf	
			No. of data	(%)	No. of data	(%)	No. of data	(%)	No. of data	(%)
Sungai Pari	Manjoi	20	6	30.0	19	95.0	2	10.0	4	20.0
	Buntong	20	1	5.0	1	5.0	0	0	0	0
Sungai Raia	Kg. Tanjung	20	1	5.0	0	0	1	5.0	0	0
	Bt. Gajah	21	1	4.8	0	0	0	0	0	0
Sungai Kinta	Ipoh	20	6	30.0	3	15.0	4	20.0	6	30.0
Sungai Kampar	KM 34	21	7	33.3	7	33.3	0	0	0	0

### **2.2.2 Sungai Langat Catchment**

A total of 165 sediment data were obtained at Sungai Langat Catchment from 2000 until 2002 by Ariffin (2004). Data collection including flow discharge, water-surface width, flow depth, water-surface slope, bed load, suspended load and bed material has been carried out by referring to Ab. Ghani et al. (2003). The tributaries Sungai Lui and Sungai Semenyih flow into the main river, Sungai Langat. In contrast, the lower region of Sungai Langat has yet to be fully developed. There are rubber and

oil palm plantations within the catchment. Four study sites (Figure 2.9) were chosen in this study.



Figure 2.9: Study Sites at Sungai Langat Catchment

### ***Range of Data***

Table 2.4 shows a summary of the data collected at the four study sites. The mean sediment sizes for all sites show that the study reaches are sand-bed streams where  $d_{50}$  range from 0.37 to 2.30 mm. The aspect ratios for the three rivers (Sungai Langat, Sungai Lui and Sungai Semenyih) are between 9 and 66 indicating that they are moderate-size channels. For all study sites the water-surface slopes were found to be mild with values range in between 0.0003 and 0.017.

Table 2.4: Range of Field Data for Sungai Langat Catchment (Ariffin, 2004)

Study Site	Sungai Langat @ Kajang	Sungai Langat @ Dengkil	Sungai Lui @ Kg Lui	Sungai Semenyih @ Kg Sg Rinching
No. of Sample	20	3	92	50
Discharge, Q (m <sup>3</sup> /s)	3.75 – 39.56	33.49 – 87.79	0.74 – 17.17	2.60 – 8.04
Water surface width, B (m)	15.0-20.0	30.0-33.0	15.0 – 17.0	13.5 – 15.0
Flow depth, y <sub>o</sub> (m)	0.45-1.39	1.90-3.23	0.23 – 0.99	0.36 – 0.82
Hydraulic radius, R (m)	0.42-1.22	1.70-2.66	0.22 – 0.89	0.34 – 0.73
Water surface slope, S <sub>o</sub>	0.0043 – 0.0051	0.0167	0.0003 – 0.009	0.0023 – 0.015
Mean sediment size, d <sub>50</sub> (mm)	0.37 – 2.13	0.52 – 0.95	0.50 – 1.74	0.88 – 2.29
B/y <sub>o</sub>	14.4 – 33.5	9.30 – 17.4	17.2 – 65.8	17.1 – 41.5
Bed load, T <sub>b</sub> (kg/s)	0.02 – 1.29	0.27 – 0.65	0.04 – 1.55	0.65 – 3.16
Suspended load, T <sub>s</sub> (kg/s)	0.66 – 77.51	18.69 – 118.31	0.05 - 5.77	0.24 - 10.77
Total load, T <sub>j</sub> (kg/s)	0.78 – 77.86	18.96 – 118.93	0.27 - 6.16	1.08 - 12.08

### ***Sediment Transport Analysis***

The observed flows range in between 0.74 m<sup>3</sup>/s to 87.8 m<sup>3</sup>/s carrying total sediment load between 0.27 kg/s to 118.9 kg/s. The sediment concentration for Sungai Langat as the main tributary exceeded those from the two tributaries. Figures 2.10 and 2.11 show the bed load rating curve and total load rating curve, which the sediment ratings show that the points scatter widely, although the transport rate is sensitive to discharge.

### ***Sediment Transport Equation Assessment***

The analysis for a total of 165 set of data was also carried out using four sediment transport equations namely Yang's equation (1972), Engelund & Hansen's equation (1967), Ackers-White's equation (1973) and Graf's equation (1971). From the results of total load transport assessment (Table 2.5), it can be concluded that applications of Yang and Engelund & Hansen equations yielded highest percentage of discrepancy ratio in predicting sediment transport in sand-bed rivers.

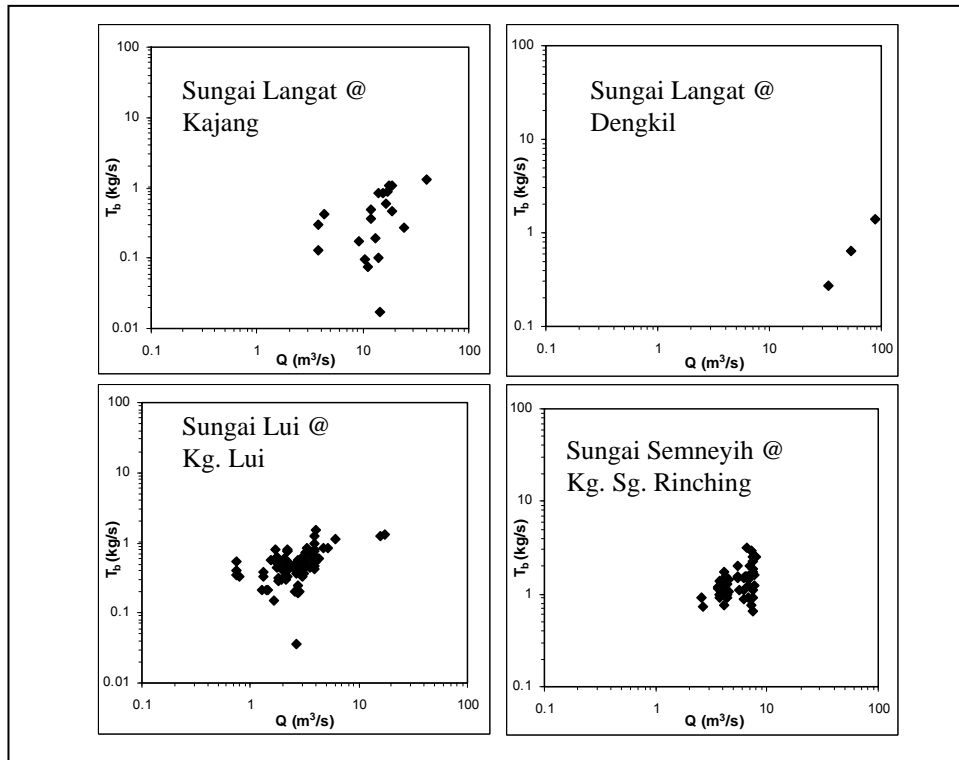


Figure 2.10: Bed Load Rating Curves for Sungai Langat Catchment (Ariffin, 2004)

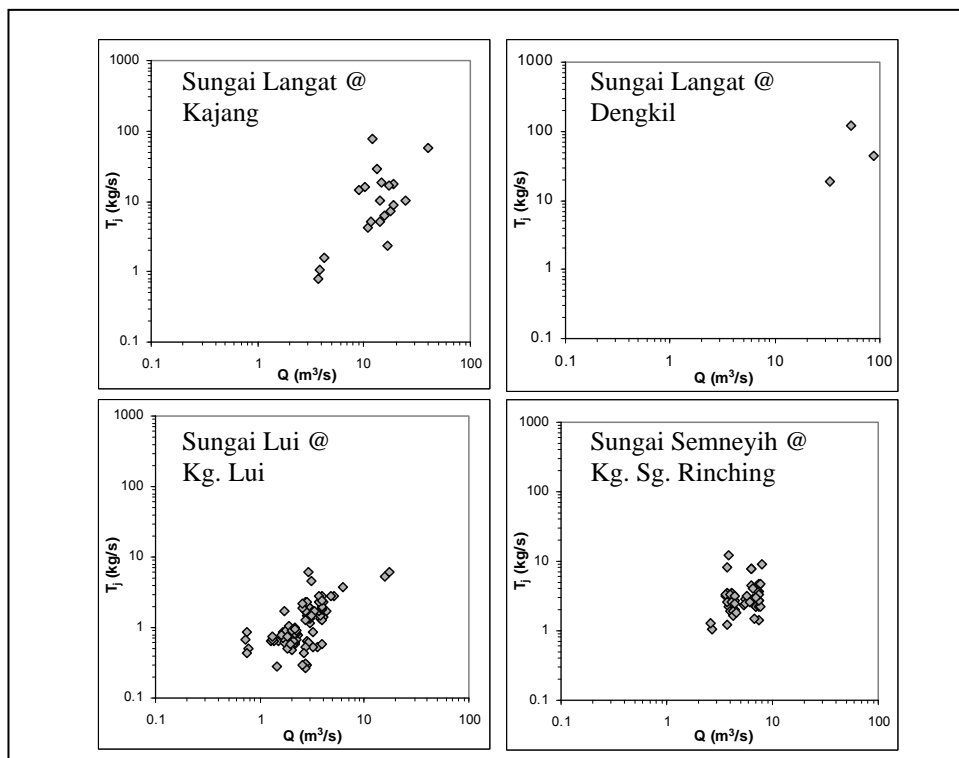


Figure 2.11: Total Load Rating Curves for Sungai Langat Catchment (Ariffin, 2004)

Table 2.5: Summary of Sediment Transport Equation Assessment for Sungai Langat Catchment (Ariffin, 2004)

River	Study Site	Total of Data	Discrepancy Ratio (0.5 – 2.0)							
			Yang		Engelund & Hansen		Ackers & White		Graf	
			No. of data	(%)	No. of data	(%)	No. of data	(%)	No. of data	(%)
Sungai Langat	Kajang	20	4	20.0	5	25.0	0	0	0	0
	Dengkil	3	0	0	0	0	0	0	0	0
Sungai Lui	Kg. Lui	92	27	29.3	14	15.2	21	22.8	2	2.2
Sungai Semenyih	Kg. Sg. Rinching	50	18	36.0	15	30.0	12	24.0	4	8.0

### 2.2.3 Nile River Catchment

Measurements of bed-load and suspended-load transport rates were carried out at four study sites of the Nile River, Egypt by Abdel-Fattah (1997<sup>a,b,c,d</sup>) along the entire length from Aswan to Cairo (Figure 2.12) using a mechanical sampler called the Delft Nile Sampler.

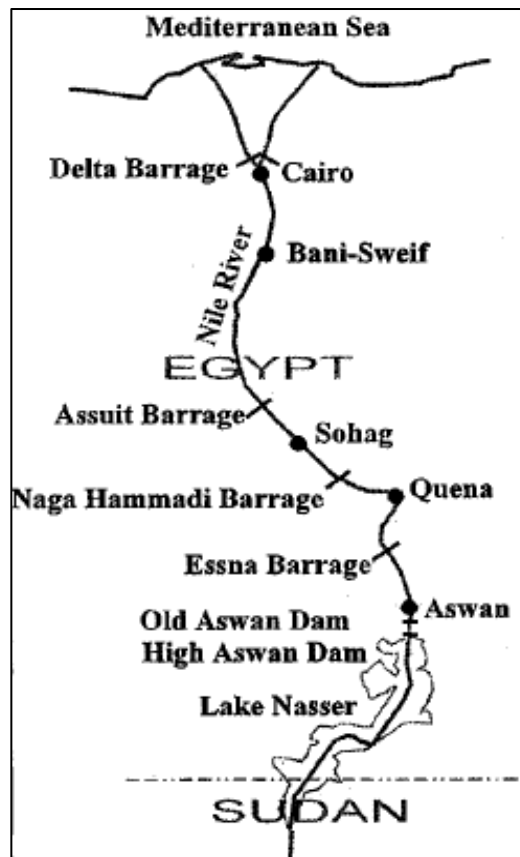


Figure 2.12: Study Sites along Nile River, Egypt (Abdel-Fattah et al., 2004)

The sediment load transport was measured using the Delft-Nile Sampler (Van Rijn and Gaweesh, 1992; Van Rijn, 1993), which was operated from an anchored boat. This mechanical sampler was designed to measure, in contact to the bed, the bed load and the suspended load up to 0.5 m above the bed (the sampler height). A separate device (Delft fish) equipped with a small nozzle connected to a suction pump, a propeller meter, and an echo sounder for depth determination was used to measure suspended load at different water depths above the bed and near the water surface (Figure 2.13).

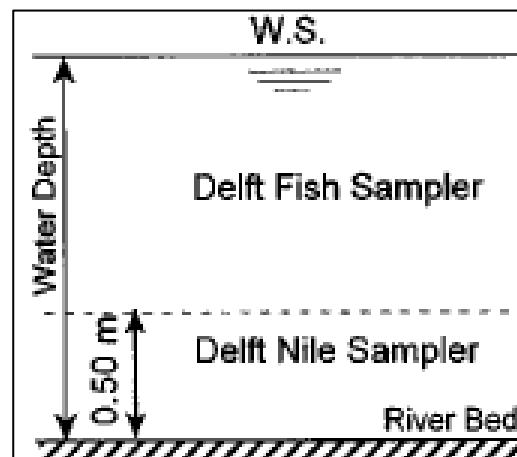


Figure 2.13: Sketch of Measuring Technique (Abdel-Fattah et al., 2004)

The locations of the measurement cross sections were selected in a stable reach to avoid unsteady bed conditions during the measurements. The measurements of bed, suspended load, and velocity profiles were conducted at the six measurement stations (St1 to St6, Figure 2.14). At each station, measurements were performed at five locations (L1, L2, L3, L4, and L5) distributed over the length of the longitudinal section, which is almost equal to the mean bed form length. Figure 2.14 shows the layout of the measurement stations and locations.

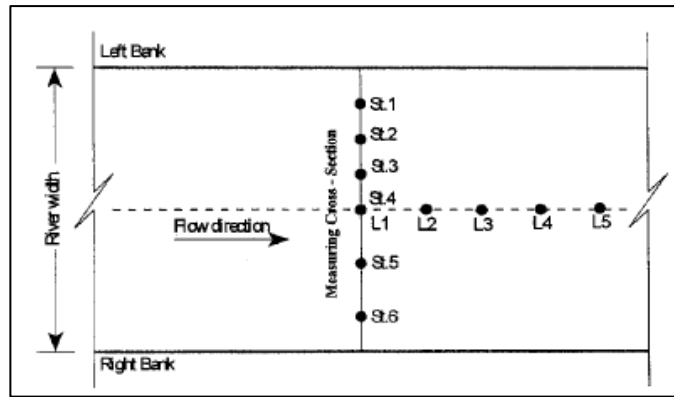


Figure 2.14: Layout of Measurement Stations and Locations (Abdel-Fattah et al., 2004)

The measurements were performed at 30 locations, and at each station the following measurements were performed for the five locations:

- Ten instantaneous samplings using the Delft Nile Sampler with a bag of mesh size 250 mm; the sampler was lowered to the bed and immediately raised up after the nozzle had touched the bed.
- Eight bed load samplings of 3 minutes each using the Delft Nile Sampler with the same bag size.
- Suspended load samplings over the water depth using the Delft Nile and the Delft Fish Samplers. The suction of the samples was driven by a set of pulsation pumps. The samples were collected (volume = 5 L) in plastic buckets.
- Velocity profiles over the water depth using propeller current meters installed on the Delft Nile and the Delft Fish Samplers. The flow velocity measurements were carried out as follows:
  - At 0.18, 0.37 and 0.50 m above the bed level by using three propeller-type current meters attached to the Delft Nile Sampler
  - From 0.50 m above the bed level to the water surface by using a propeller-type current meter attached to the Delft Fish.
- One bed material sample at the end of each measurement using a grab sampler.

- Water temperature was measured.
- At each station, a longitudinal bed profile for the five locations was sounded.

The main topographic and hydraulic characteristics of the four study sites were summarized in Table 2.6 and measured data were presented in Tables 2.7.

Table 2.6: Main Characteristics of the Study Sites (Abdel-Fattah et al., 2004)

Location	Aswan	Quena	Sohag	Bani-Sweif
River width	517	578	481	400
Local slope	3.5	4.2	5.7	8.5
Flow discharge	1,331	1,250	1,560	1,040
Average bed form length	44	22	24	28
Average bed form height	1.6	0.8	0.7	0.75

Table 2.7: Measured Data at Four Study Sites, Nile River (Abdel-Fattah et al., 2004)

Station	Distance from left bank	Mean depth (m)	d <sub>10</sub> (μm)	d <sub>50</sub> (μm)	d <sub>90</sub> (μm)	Standard deviation of bed material, σ <sub>g</sub>	Velocity (m/s) Mean	Suspended Load (kg/m/s) Mean	Bed Load (kg/m/s) Mean
Aswan									
1	60	4.98	207	313	493	2.0	0.482	0.0078	0.0056
2	140	5.72	187	322	580	1.8	0.487	0.0081	0.0012
3	220	4.78	215	359	577	1.7	0.587	0.0089	0.0038
4	300	5.02	234	389	635	2.0	0.618	0.0098	0.0058
5	380	4.82	266	542	1197	1.9	0.591	0.0092	0.0113
6	460	5.70	186	345	735	2.5	0.415	0.0077	0.0005
Quena									
1	81	4.34	231	378	556	1.2	0.66	0.034	0.0167
2	164	4.65	141	282	429	2.0	0.67	0.033	0.0120
3	252	4.40	166	267	389	1.5	0.60	0.010	0.0064
4	338	3.55	161	277	354	1.5	0.49	0.006	0.0015
5	414	4.03	135	239	315	1.6	0.31	0.003	0.0001
6	517	3.88	184	267	344	1.4	0.36	0.003	0.0009
Sohaj									
1	55	4.54	352	586	1155	2.0	0.82	0.0396	0.0117
2	124	4.58	177	453	594	1.4	0.77	0.1118	0.0313
3	183	4.13	236	472	987	1.8	0.88	0.1236	0.0291
4	274	4.19	160	258	412	1.1	0.78	0.2199	0.0259
5	355	4.12	176	251	330	1.7	0.75	0.0979	0.01
6	425	4.27	204	314	591	1.5	0.61	0.0175	0.002
Bani-Sweif									
1	344	2.82	306	603	1661	1.77	0.81	0.0163	0.0191
2	282	2.76	415	490	1,216	1.64	0.74	0.0272	0.0152
3	221	2.76	359	409	700	1.43	0.72	0.0422	0.0178
4	179	3.40	305	343	543	1.39	0.66	0.0416	0.0126
5	120	4.28	295	350	697	1.56	0.71	0.0482	0.0057
6	60	5.04	251	296	619	1.63	0.73	0.0623	0.0040